



37FSB

BALANCED FULLY SPLIT SEAL

Applications

The Type 37FSB fully split seals contribute to significantly reduced maintenance on larger, difficult-to-seal equipment. They are recommended for use on heavy duty, packed equipment that previously could not accommodate mechanical seals because of severe vibration, difficulty to disassemble, and similar problems. Type 37FSB seals are outside mounted and can be used on vertical and horizontal applications.

- For use in larger rotating shaft equipment — mixers, agitators, pumps.
- For use in pulp and paper pumps, food and beverage mixers, power generation pumps, pharmaceutical slow-running mixers, wastewater treatment raw sewage pumps and mining slurry pumps.
- Type 37FSB seals are repairable easily and quickly on-site or at any John Crane Seal Rebuilding Center, with genuine John Crane factory-specified replacement parts. This unique feature minimizes replacement costs and production downtime.


Operating Conditions*

- Temperatures: +82°C/+180°F maximum
- Pressures: 14 bar g/200 psig maximum
- Speeds: 1800 rpm maximum

*For other operating conditions, consult John Crane Engineering

37FSB

INCH RANGE

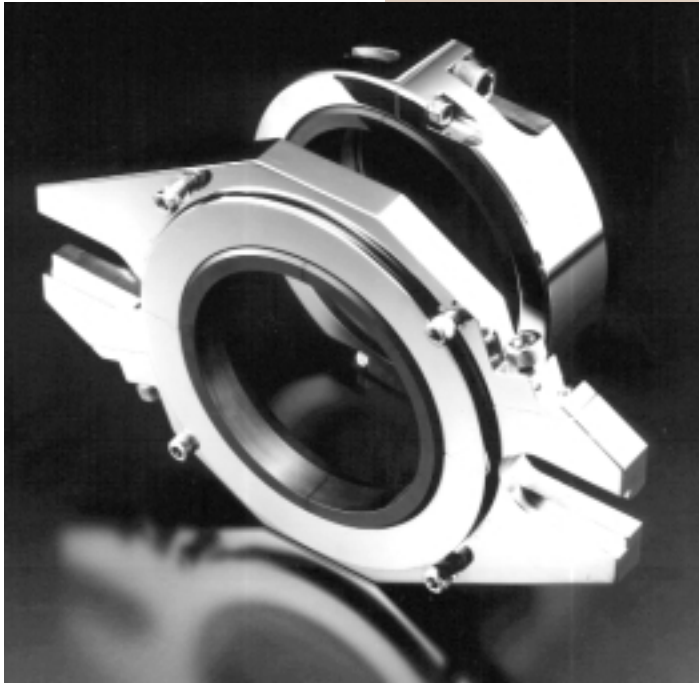



37FSB

BALANCED FULLY SPLIT SEAL

Design Features

Easy Installation


Fewer parts and simple design allow for easy installation. Seal can be readily mounted on worn shafts and on out-of-square stuffing boxes. No modification of equipment is needed.

Solves Movement Problems

Type 37FSB seal solves vibration problems that prohibit use of other seal designs. Unique John Crane-developed compression ring provides extreme flexibility. Shaft deflections, angular misalignments, and runouts are "tracked" by the seal without diminishing performance.

Self-Aligning

Rotating assembly of this new generation split seal, self-aligns square with the shaft for true running under varying conditions.

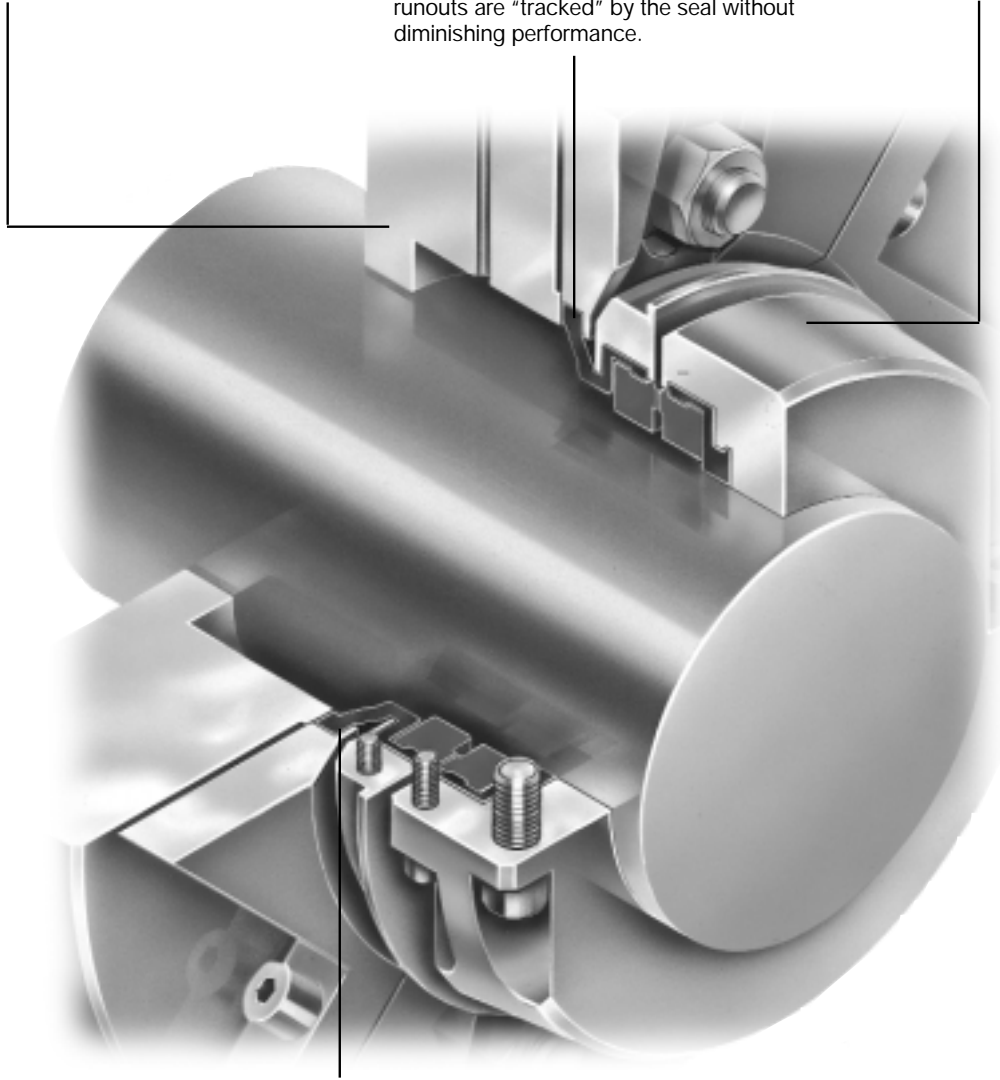

Non-Clogging

Non-pusher design provides extreme flexibility in operation with no hang-ups or clogging. Design eliminates springs and O-rings.



37FSB

BALANCED FULLY SPLIT SEAL

Type 37FSB Typical Arrangement/Dimensional Data

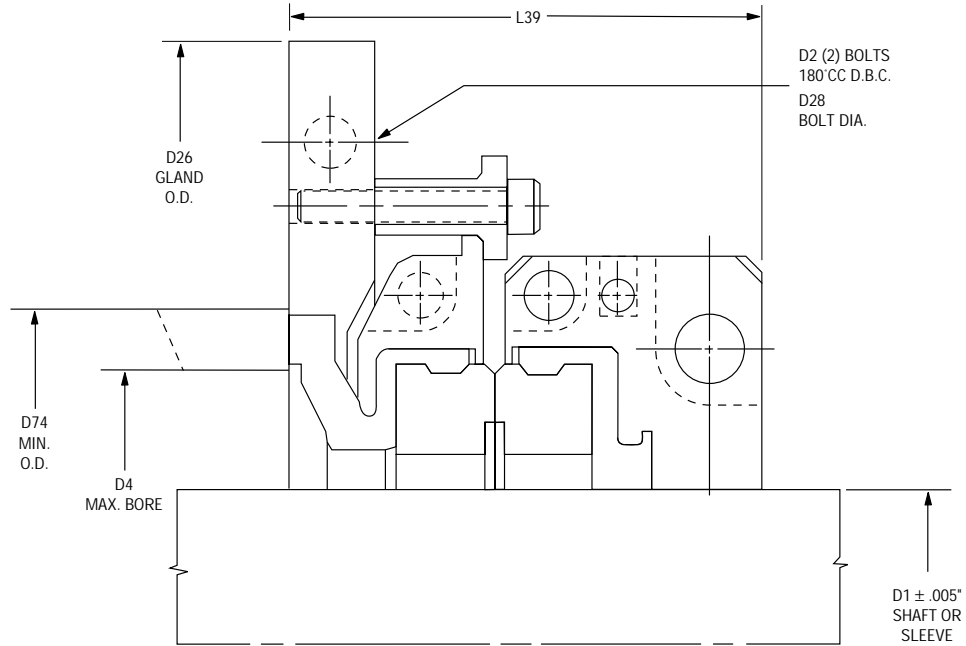


Chart 1. Type 37FSB Dimensional Data (Inches)

Shaft/ Sleeve Size D1	L39						
	D2	D4	D26	D28	D74	SIC/SIC*	CAR/SIC **
3.437-3.811	8.250-10.750	5.375	11.750	.750	6.182	3.42	3.48
3.812-4.186	8.625-11.125	5.750	12.125	.750	6.557	3.42	3.48
4.187-4.561	9.000-11.500	6.125	12.500	.750	6.932	3.42	3.48
4.562-4.936	9.375-11.875	6.500	12.875	.750	7.307	3.42	3.48
4.937-5.311	9.750-12.250	6.875	13.250	.750	7.682	3.42	3.48
5.312-5.686	10.125-12.625	7.250	13.625	.750	8.057	3.42	3.48
5.687-6.061	10.500-13.000	7.625	14.000	.750	8.432	3.42	3.48
6.062-6.436	10.875-13.375	8.000	14.375	1.000	8.807	3.63	3.69
6.437-6.811	11.250-13.750	8.375	14.750	1.000	9.182	3.63	3.69
6.812-7.186	11.625-14.125	8.750	15.125	1.000	9.557	3.63	3.69
7.187-7.561	12.000-14.500	9.125	15.500	1.000	9.932	3.63	3.69
7.562-7.936	12.375-14.875	9.500	15.875	1.000	10.307	3.63	3.69
7.937-8.311	12.750-15.250	9.875	16.250	1.000	10.682	3.63	3.69
8.312-8.686	13.125-15.625	10.250	16.625	1.000	11.057	3.63	3.69
8.687-9.061	13.500-16.000	10.625	17.000	1.000	11.432	3.63	3.69
9.062-9.436	13.875-16.375	11.000	17.375	1.000	11.807	3.63	3.69
9.437-9.811	14.250-16.750	11.375	17.750	1.000	12.182	3.63	3.69
9.812-10.187	14.625-17.125	11.750	18.125	1.000	12.557	3.63	3.69

* SIC/SIC = Silicon Carbide vs. Silicon Carbide

** CAR/SIC = Carbon vs. Silicon Carbide




37FSB

BALANCED FULLY SPLIT SEAL


Flexibility Specifications

1. Seal chamber dimensions and finishes:

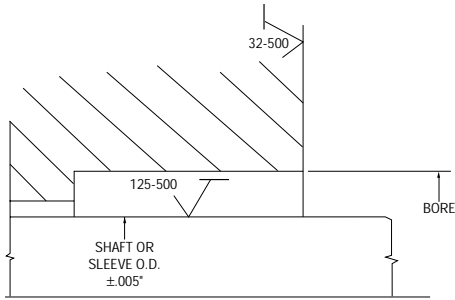


2. Axial end play

Seal sizes 3.625" to 10.000" -0.060" T.I.R. max.

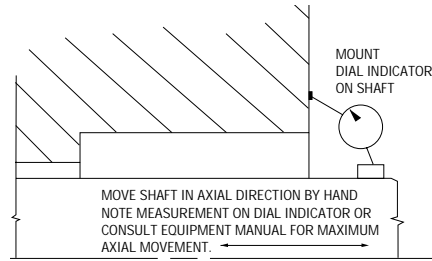


3. Squareness of seal chamber face to shaft


Carbon vs. Silicon = 0.050" T.I.R. max
Silicon vs. Silicon = 0.100" T.I.R. max

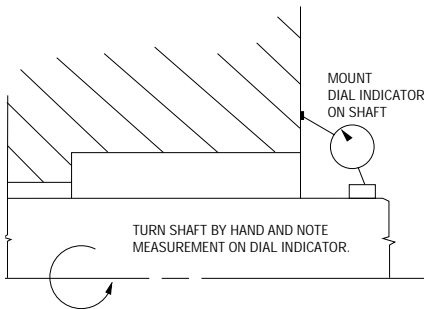


4. Shaft runout (0.020" T.I.R. max).

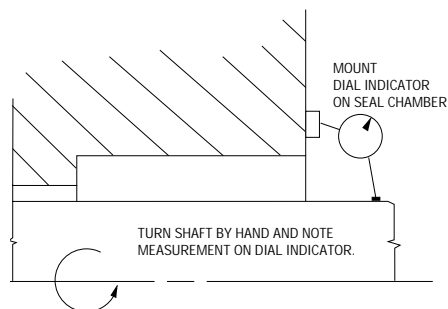

5. Stuffing box face waviness (0.030" T.I.R. max).

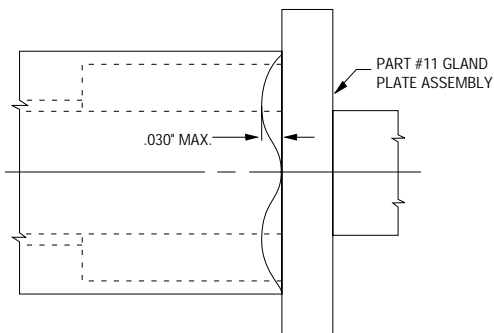

6. Radial shaft movement (0.125" T.I.R. max)

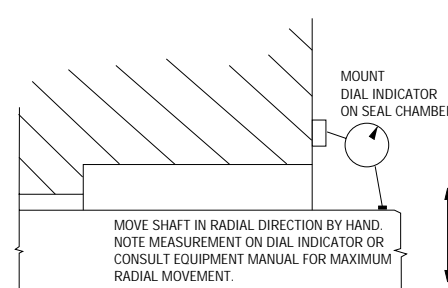




37FSB

BALANCED FULLY SPLIT SEAL

Chart 2. Pressure/Velocity (PV) Limits

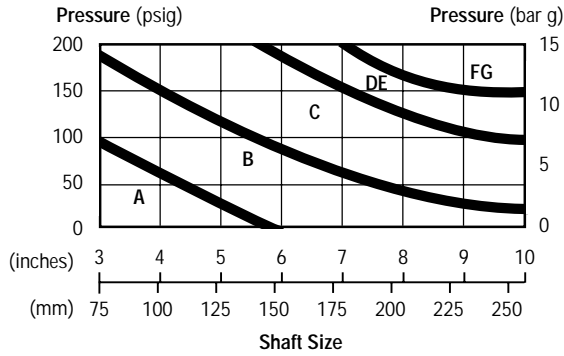

- A. Silicon Carbide vs. Silicon Carbide (Similar) 1800 rpm
- B. Silicon Carbide vs. Silicon Carbide (Similar) 1200 rpm
- C. Silicon Carbide vs. Silicon Carbide (Similar) 800 rpm
- D. Silicon Carbide vs. Silicon Carbide (Dissimilar) 1800 rpm
- E. Carbon vs. Silicon Carbide 1800 rpm
- F. Silicon Carbide vs. Silicon Carbide (Dissimilar) 1200 rpm
- G. Carbon vs. Silicon Carbide 1200 rpm

Chart 3. Materials of Construction

Seal Component Materials		Secondary Sealing Element	Primary Ring	Hardware Clamp Ring, Drive Ring, Gland Plate, Fasteners	Mating Ring	Mechanical Loading Device Spring
Materials	Standard	Ethylene Propylene	Silicon Carbide Coarse Grain	316 Stainless Steel	Silicon Carbide Coarse Grain	
		Buna-N	Carbon	Monel (Bolts only)		
	Options	Fluoroelastomer				
		Aflas*				

* Aflas is a registered trademark of Asahi Glass Co., Ltd.

Chart 4. Criteria for Installation

Shaft/Sleeve	Limits
Surface Finish	125-500 Ra
Ovality/Out of Roundness (Shaft)	0.13 mm/0.005"
End Play/ Axial Float Allowance	±0.76 mm/0.030"
Axial Runout /Out of Squareness	1.27 mm/0.050" TIR Carbon vs. Silicon Carbide 2.54 mm/0.100" TIR Silicon Carbide vs. Silicon Carbide



37FSB

BALANCED FULLY SPLIT SEAL

Application Information

The Type 37FSB Seal is custom-tailored to the application required. Applications must be reviewed by John Crane Engineering. The following data is necessary to evaluate the proposed application.

Customer's Name: _____ Location: _____
JC Salesman: _____ Phone # _____

1. Equipment:

Type: _____ Manufacturer: _____
Model: _____ Installation: Horizontal _____ Vertical: _____
If Vertical, Top or Bottom Entering: _____

2. Application:


Process Fluid: _____ Specific Gravity: _____
Viscosity: _____ Vapor Pressure: _____
Injection Fluid: _____ Available Pressure: _____
Max. Allowable Pressure: _____ Max. Allowable Flow Rate: _____

3. Operation:

Speed: _____ Temperature: _____ Stuffing Box Pressure: _____
Suction Pressure: _____ Discharge Pressure: _____

4. Dimensions:

Sleeve O.D. (A) (if applicable): _____ Shaft/Sleeve Surface Finish: _____
Sleeve Extension (B) (if applicable): _____ Shaft O.D. (C): _____
Stuffing Box Bore (D): _____ Stuffing Box O.D. (E): _____
Bolt Circle Diameter (F): _____ Number & Size of Bolts (G, H): _____
Type of Bolts: (Circle Appropriate): Bolt Extension (I): _____
Nearest Obstruction (J): _____
Swing Bolts:
Studs: Removable? Yes No
Tapped Holes:



John Crane Mechanical Seals
Engineered Sealing Systems

North America
Morton Grove, Illinois USA

Tel: 1-847-967-2400
Fax: 1-847-967-3915
1-800-SEALING

Latin America
Mexico City, Mexico

Tel: 52-5-567-4511
Fax: 52-5-587-2342

Europe, Middle East, Africa
Slough, UK

Tel: 44-1753-224000
Fax: 44-1753-224224

Asia Pacific
Singapore

Tel: 65-222-9161
Fax: 65-223-5035

If the products featured will be used in a potentially dangerous and/or hazardous process, your John Crane representative should be consulted prior to their selection and use. In the interest of continuous development, John Crane Companies reserve the right to alter designs and specifications without prior notice.