

# *Servo Drives 930 fluxxtorque*



**decentralised, intelligent, precise**

Servo Drives 930 fluxxtorque

**Lenze**

**Lenze**

## **Our commitment to you**

If you are looking for effective and easy solutions for the implementation of your machine and drive concepts or want to optimise existing concepts and cut your costs, Lenze is your ideal partner.

We have more than 50 years' experience at the cutting edge of drive and automation technology.




**Drive and automation technology set in motion by Lenze – for example in logistics centres, in the textile and printing industry, in the automotive industry or as the driving force behind robots.**




# Product key

Small drives


## Mounting position (A-F) and position of system blocks (1-6)

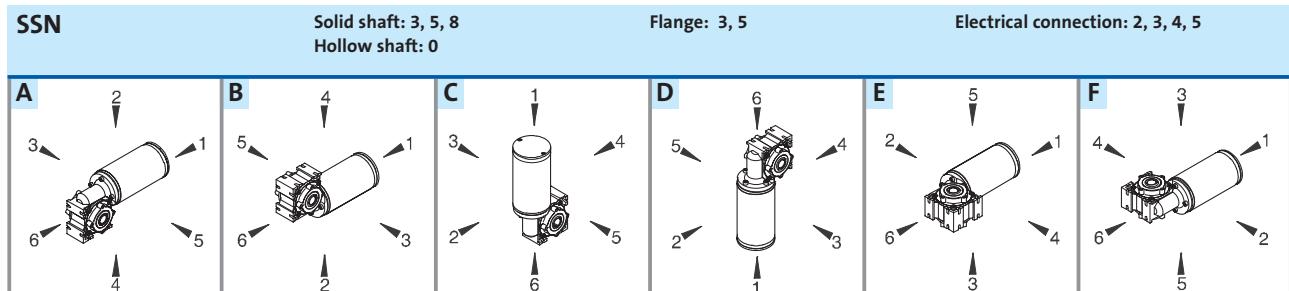


Shaft/flange position




## Helical geared motors GST

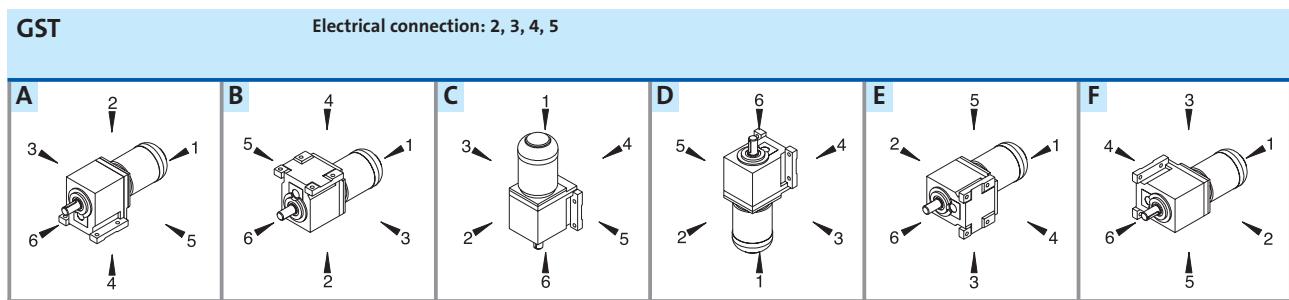

## Helical geared motors GKR

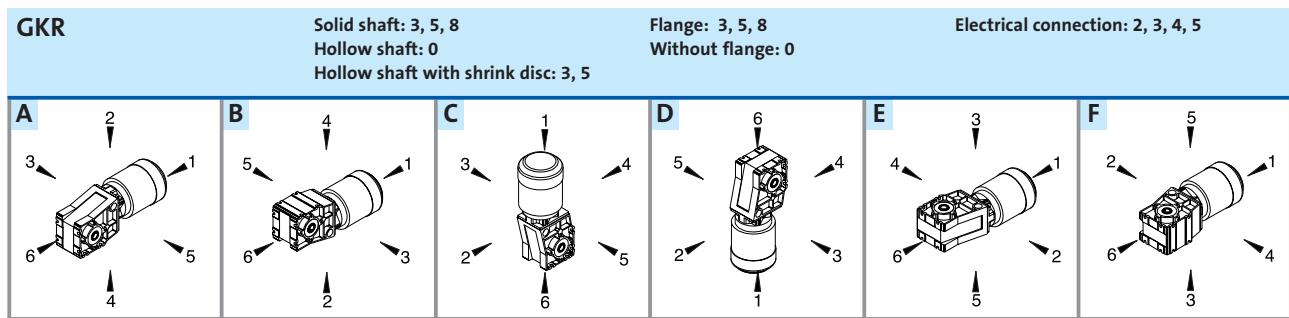

## Electrical connection with controller in mounting position A

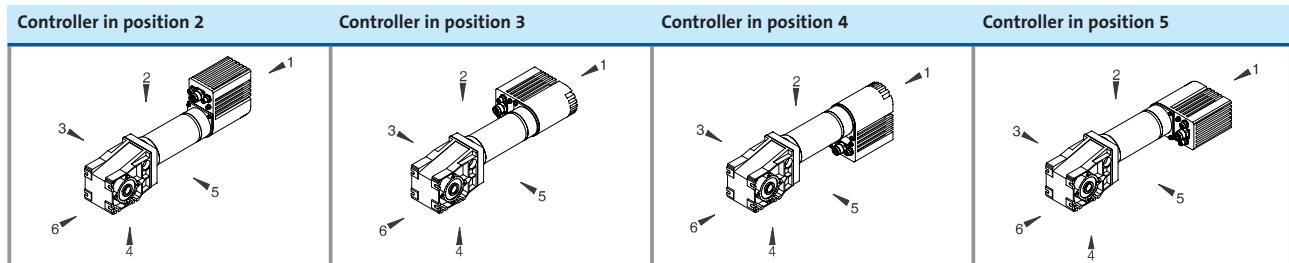

# The Company

## Introducing Lenze small drives

**Innovations in plant and engineering are powered nowadays by mechatronic drive systems. As an experienced partner in drive and automation systems, Lenze can provide you with complete solutions. Motion control systems are now at the forefront, rather than individual drives. Lenze views mechatronics as a key technology for the 21st century and is therefore supporting it with relevant products and the knowledge of our application specialists.**

Lenze Small Drives specialises in drive technology in the 12 to 750 W power range. The product programme includes DC permanent-magnet motors and both synchronous and asynchronous motors which can be combined with worm, bevel, helical worm or planetary gearboxes to deliver compact and highly-dynamic power packs. Equally small but perfectly formed are the matching intelligent servo inverters, which as mechatronic units can be connected directly to the motors, installed as decentralised units in the machine or as compact versions in the control cabinet – fieldbus interface included.

The modular structure of Lenze small drives enables standard components to be used to tailor our offering to your requirements – regardless of whether the drives are connected directly to the mains or are battery-operated. We've made our home in many sectors since 1985, and can point to applications in materials handling technology, medical engineering, batching systems, handling/robotics and the printing and packaging industries.

Our objective is clearly defined: we provide you with ready-to-run mechatronic solutions that already contain a wealth of knowledge about the functions performed by your machines. You can rely absolutely on Lenze's drive and automation technology and improve the productivity of your machines and systems at the same time.

**Let's have a chat.**



# Lenze

about us


We can offer you automation solutions, including control, visualisation and drive technology, from one source. Our drive systems will improve the performance of your machines. From project planning to commissioning, we have the know-how. Our international sales and service network can provide you with expert help and advice at any time.

Cut your process costs and increase your ability to compete. Let us analyse your drive technology tasks and support you with made-to-measure solutions.

We can take an integrated approach to projects thanks to the scalability of our products and the scope of the overall portfolio. We can get the best from your machines and systems.



**At your side all over the world – with thorough and professional support from our motivated team.**

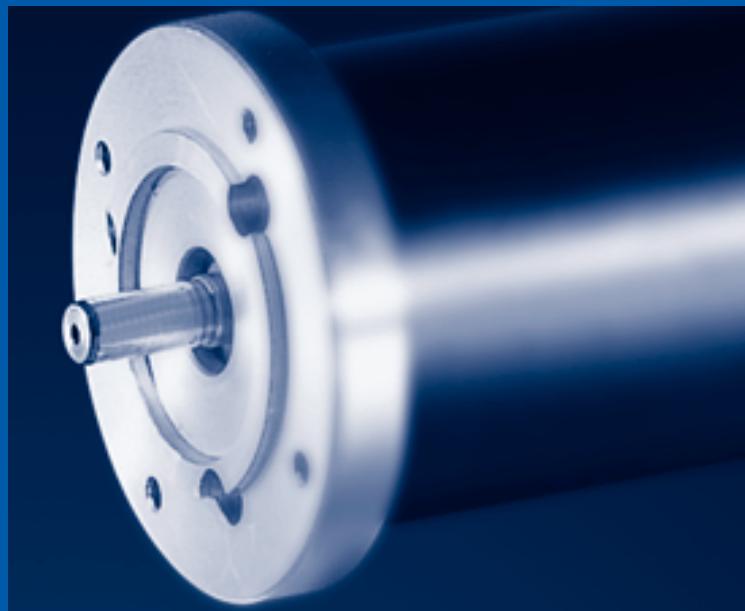

# Contents

930 fluxxtorque Servo Drives

## Product key

Fold-out page

### General information

Type code	1-2
System overview	1-6
List of abbreviations	1-7
Electronics technology	1-8
Software technology	1-13
Motor technology	1-14
Gearbox technology	1-17

1

### Drive selection

Integrated mounting 930M servo inverter for 24 V or 42 V DC	2-1
SDSGS servo motors	2-2
Servo worm geared motors SSN	2-4
Servo planetary geared motors SPL	2-12
Servo helical geared motors GST	2-18
Servo bevel geared motors GKR	2-22

2

### Integrated mounting 930M servo inverter for 230 V AC

SDSGS servo motors	3-2
Servo worm geared motors SSN	3-4
Servo planetary geared motors SPL	3-8
Servo helical geared motors GST	3-14
Servo bevel geared motors GKR	3-20

3

### Integrated mounting 930W servo inverter for 230 V AC

930W servo inverter	4-2
SDSGS servo motors	4-4
Servo worm geared motors SSN	4-6
Servo planetary geared motors SPL	4-10
Servo helical geared motors GST	4-16
Servo bevel geared motors GKR	4-24

4

### Lenze worldwide

5-2

5



# General information

---

930 fluxxtorque Servo Drives

Type code	1-2
System overview	1-4
List of abbreviations	1-5
Electronics technology	1-6
Software technology	1-11
Motor technology	1-12
Gearbox technology	1-15



## General information

### Type code

#### Servo drives type code

S D S G S S R 0 5 6 - 2 2

- [A] Product group \_\_\_\_\_
- [B] Type of current \_\_\_\_\_
- [C] Cooling \_\_\_\_\_
- [D] Housing \_\_\_\_\_
- [E] Motor \_\_\_\_\_
- [F] Options \_\_\_\_\_
- [G] Frame size according to IEC \_\_\_\_\_
- [H] Motor length \_\_\_\_\_
- [I] Pole pairs \_\_\_\_\_

#### Key to 931M servo drives type code; consisting of 931M servo inverter and SDS motor

A	S	Lenze small drives
B	D	Three-phase AC current
C	S	Naturally ventilated
D	G	Smooth housing
E	S	Synchronous motor
F	SR	Servo inverter with resolver
	SB	Servo inverter with resolver and brake
G	035	
	047	Frame size
	056	
H	2	Medium
I	2	4-pole

**Type code for geared motors****SSN40-2GVAR-047C22****Product group**

- G- Gearboxes  
S- Small drives

**Product range**

- KR- Bevel gearbox  
PL- Planetary gearbox  
SN- Worm gearbox  
ST- Helical gearbox

**Size**

- Helical gearbox -03, 04, 05  
Bevel gearbox -03, 04  
Worm gearbox 31, 40  
Planetary gearbox -52, 62, 81,

**No. of stages**

- 1- Single-stage  
2- Two-stage  
3- Three-stage

**Drive-end version**

- G- Synchronous motor SDS series

**Output design***Shaft design*

- V- Solid shaft  
D- Double shaft  
H- Hollow shaft

*Housing design*

- A- Foot-mounted with centring  
C- Without foot, with centring

*Output flange*

- L- Round flange with tapped holes  
R- Without flange  
K- Round flange with through hole

**Motor frame size**

Axis height according to standard e.g. 056 = IEC56

**Design**

- C- Compact motor with Lenze mounting flange  
N- Standard motor with IEC mounting flange

**Overall length**

- 1- S, short  
2- M, medium  
3- L, long

**Number of pole pairs**

- 1- 2-pole  
2- 4-pole



## General information

### 930 fluxxtorque Servo Drives system overview

#### 930 fluxxtorque Servo Drives system overview

##### System cables



Voltage supply  
Communication

1

##### Power supply units



##### 931W Servo Drive



##### 931M Servo Drive

0.45 Nm, 3000 rpm, 24 or 42 V DC  
0.8 Nm, 2000 rpm, 42 V DC  
99 profiles  
RS232/CAN/PROFIBUS  
Resolver, brake

##### 931M Servo Drive

0.80 Nm, 3000 rpm, 230 V AC  
1.40 Nm, 3000 rpm, 230 V AC  
99 profiles  
RS232/CAN/PROFIBUS  
Resolver, brake

##### SDSGS servo motors



##### Planetary gearbox SPL



##### Bevel gearbox GKR



##### Helical gearbox GST



##### Worm gearbox SSN





## Abbreviations used in this catalogue:

$\alpha$	Angle of action of radial force	$M_2$	[Nm]	Output torque
$c$	Load capacity of gearboxes/geared motors	$M_r$	[Nm]	Rated torque
$d_w$	[mm]	$M_A$	[Nm]	Starting torque of motor
	Effective diameter of transmission element	$M_B$	[Nm]	Holding torque of brake
$\cos \varphi$		$M_{\text{cont}}$	[Nm]	Continuous torque
$\cos \varphi_N$		$M_{\text{stall}}$	[Nm]	Stalling torque of motor
		$M_I$		Maximum torque factor
		$M_{\text{max}}$	[Nm]	Maximum torque
		$M_{\text{perm}}$	[Nm]	Permissible torque
$\cos \varphi$		$n_1$	[rpm]	Input speed
$\cos \varphi_N$		$n_2$	[rpm]	Output speed
$F_a$	[N]	$n_r$	[rpm]	Rated speed
$F_a$	[N]	$n_{\text{max}}$	[rpm]	Maximum speed
$F_{a\text{ Tab}}$	[N]	$P_1$	[kW]	Drive power
$f_{ch}$	[kHz]	$P_2$	[kW]	Output power
$f_d$	[Hz]	$P_r$	[kW]	Rated power
$F_I$		$P_V$	[kW]	Inverter power loss
$f_{\text{max}}$	[Hz]	$R$	[\Omega]	Resistance
$f_r$	[Hz]	$S_r$	[kW]	Inverter output power
$F_r$	[N]	$TU$	[°C]	Operating ambient temperature
$F_{r\text{ Tab}}$	[N]	$UG$	[V]	DC-bus voltage
$F_r$	[N]	$U_r$	[V]	Rated voltage
$f_w$		$U_{\text{mains}}$	[V]	Mains voltage
$f_z$		$\hat{U}$	[kV]	Voltage peak
$i$	Ratio			
$\varphi$	Ratio step	$IP$		International protection code
$\eta$	Mechanical efficiency			
$I_0$	[A]	$IEC$		International Electrotechnical Commission
$I_A$	[A]			
$I_{\text{max}}$	[A]	$DIN$		Deutsches Institut für Normung
$I_r$	[A]			
$I_{\text{mains}}$	[A]	$VDE$		Verband deutscher Elektrotechniker
$J_{\text{ext}}$	[kgm <sup>2</sup> ]	$USDA$		United States Department of Agriculture
$J_{\text{load}}$	[kgm <sup>2</sup> ]	$NEMA$		National Electrical Manufacturers Association
$J_{\text{mot}}$	[kgm <sup>2</sup> ]			
$J_A$	[kgm <sup>2</sup> ]	$AC$		Alternating current/voltage
		$DC$		Direct current/voltage
$J_B$	[kgm <sup>2</sup> ]	$EMC$		Electromagnetic compatibility
$k$		$EN$		European standard
$L$	[mH]	$CE$		Communauté Européenne
$m$	[kg]			
$M_0$	[Nm]	$IM$		International Mounting Code
$M_1$	[Nm]			



## General information

### Drive technology

#### Features

The 931M drive is a synchronous motor with an integrated, bus-compatible servo inverter.

The difference between the 931W and 931M drives is the separation of the motor and servo inverter.



However, there is no difference between the functionality of the M and W types, in either the 230 V AC or 24/42 V DC voltage versions.

All drives have 100 "driving records" in which different operating modes such as speed operation, torque operation, positioning operation or following error operation can be entered, along with individual settings. The driving records can be combined to form motion sequences.

The drives are equipped with various monitoring functions such as overvoltage and undervoltage monitoring, following error monitoring, temperature monitoring, etc. Both the motor or winding temperature and the temperature of the power electronics in the controller are monitored. Due to the temperature sensitivity of the power electronic components, power derating is required from a temperature of 70°C and upwards. With inverter temperatures of 78°C or more, the servo inverter is switched off.

As far as motors are concerned, only synchronous motors with resolvers are used. The technical data relating to each of the different designs is summarised in the following tables.

#### 931M/W servo inverter

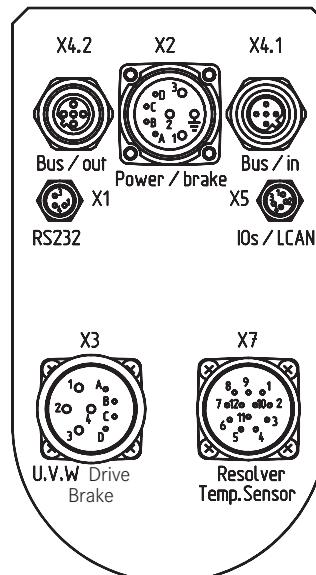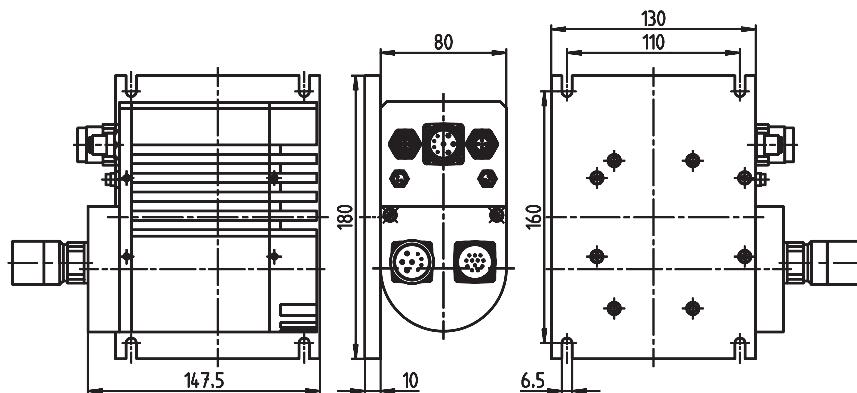



## Design

A number of different versions of the controller can be ordered. There is also a choice of different voltages, a variety of bus systems and either Local CAN or I/O. With this last option, the user can select either a fixed input and

output or a Local CAN interface for the purpose of connecting various add-on modules.

In the following table, possible combinations are indicated by a dot:

Type	Supply voltage			Bus system/Interface			Inputs/Outputs	
	24 V DC	42 V DC	230 V AC	PROFIBUS	CAN bus	Local Can	IOs	RS232
931 MPN21			●	●		●		●
931 MPN11			●	●			●	●
931 MCN21			●		●	●		●
931 MCN11			●		●		●	●
931 MPN21				●		●		●
931 MPN11				●			●	●
931 MCN21					●	●		●
931 MCN11					●		●	●
931 WPN20			●	●		●		●
931 WPN10			●	●			●	●
931 WCN20			●		●	●		●
931 WCN10			●		●		●	●
931 WPN20				●		●		●
931 WPN10				●			●	●
931 WCN20					●	●		●
931 WCN10					●		●	●
931 MPK21	●			●		●		●
931 MPK11	●			●			●	●
931 MCK21	●				●	●		●
931 MCK11	●				●		●	●
931 MPK21		●		●		●		●
931 MPK11		●		●			●	●
931 MCK21		●			●	●		●
931 MCK11		●			●		●	●



## General information

### Drive technology

#### General data and operating conditions

In general, the following standards and operating conditions apply to the 931M and 931W drives:

<b>Conformity</b>	CE Low-Voltage Directive 73/23/EEC	
<b>Regulations</b>	Requirements in accordance with IEC/EN 61800-3 (Category C3)	
<b>Climatic conditions</b>	Air humidity max. 90% no condensation	
<b>Cooling</b>	Passive via housing surface and heatsink	
<b>Admissible temperature range</b>		
Transport	-25°C to +70°C	
Storage	-25°C to +70°C	
Operation	0°C to +40°C	
Internal inverter temperature	$T_{el} > 70^\circ\text{C}$ : power derating Disconnection at $T_{el} > 78^\circ\text{C}$	
<b>Permissible site altitude</b>	0 to 1000 m above msl	Beyond 1000 m above msl, the rated output current is reduced by 5%/1000 m
<b>Mounting position</b>	Any mounting position and alignment is permissible (see restriction)	
<b>Free space</b>		
Above/below	$\geq 50 \text{ mm}$	
To the sides	$\geq 50 \text{ mm}$	
<b>Enclosure</b>	IP54	
<b>DC connection system</b>	Possible with restriction	

#### Inputs, outputs and bus systems for the 931M drive type

Digital inputs – standard I/O	1 input, 1 output All inputs and outputs can be configured as Active High or Active Low as required.
Digital inputs - Local CAN, optional	Only when used in conjunction with a function module (in preparation). Further information only available on request from Lenze GmbH & Co KG, Kleinantriebe.
Cycle time of digital I/O	Adjustable using scanning time (at least 500 $\mu\text{s}$ ). If the Local CAN option is being used, the cycle time is < 5 ms.
RS232	
CAN (optional)	CANopen in accordance with DS301 standard as well as DSP402
PROFIBUS (optional)	PROFIBUS (PROFIDRIVE)



## General data and operating conditions

The data relating to open and closed loop control is summarised in the following table. For further information, please consult the Manual (Software).

Open and closed loop control for the 931M drive type	
Closed loop control method	Torque, speed, following error and position control
Cycle time (current controller)	$\leq 100 \mu\text{s}$
Cycle time (speed, following error and position controller)	Adjustable using scanning time (at least 500 $\mu\text{s}$ )
Switching frequency (PWM)	10 kHz
Maximum output frequency	500 Hz
Positioning range	$+/-2^{19}$ revolutions
Saveable function data records	100
Encoder evaluation	resolver (12 bit internal resolution)
Monitoring	Overtorque/undervoltage, temperature of motor and output stage

## Internal brake resistor

The 230 V supply voltage version of the 931M servo inverter is equipped with an integrated brake chopper and brake resistor, which is intended to be used with a permanent power of 40 W<sub>el</sub> or a short-term peak power of 200 W<sub>el</sub>.

A brake chopper is not implemented in the extra-low voltage versions. The voltage threshold for activating the internal brake chopper is around 375 V DC.

Internal brake resistor (230 V version)	
Resistance R [Ω]	550
Permanent power P <sub>br, el.</sub> [W]	40
Peak power P <sub>peak, el.</sub> [W]	200
Mech. continuous braking torque * (n=3000 rpm) [Nm]	0.2
Mech. peak torque * (n=3000 rpm) [Nm]	0.8

\* The data relates to the torque stated on the motor shaft.  
These values take the motor friction torque into account!



1



## fluxxtorque control M/W technical data

**Small drives**

fluxxtorque control M/W

The fluxxtorque control M/W program allows parameter setting for the 931M/W servo position controllers.

The Lenze fluxxtorque control M/W parameterisation software allows the user to adapt the 931M/W servo position controller to meet the requirements of the application in hand. The parameter setting program has the following performance features:

- ▶ Parameter setting for the 931M/W servo position controller
- ▶ Setting of all parameters via the PC
- ▶ Display of status and operating variables
- ▶ Loading and saving of parameter sets
- ▶ Offline parameterisation
- ▶ Oscilloscope function
- ▶ Supported languages: English, German
- ▶ Software available free of charge from [www.Lenze.de](http://www.Lenze.de)



## General information

### Motor technology

#### Rated data of the drive systems

Type	SDSGSSR35		SDSGSSR47		SDSGSSR56					
Input data										
<b>Power supply</b>										
Voltage (all data +/-10%)	24 V DC	42 V DC	42 V DC	230 V AC	230 V AC					
Frequency [Hz]				50	50					
<b>Control supply</b>										
Voltage (all data +/-10%)	24 V DC									
Current [A DC ]	0.2									
<b>Brake supply</b>										
Voltage (all data +/-10%)	24 (fault where U < 20 V or U > 28 V)									
Current [A DC ]	Approx. 1									
<b>Output data</b>										
<b>Output currents</b>										
Fundamental rated current I <sub>out</sub> [Arms]	8.4	4.5	4.7	1.1	1.78					
Max. current I max. [Arms]	13.5			4.5						
Rated frequency [Hz]	100									
<b>Mech. output data</b>										
Rated operating mode	S1									
Rated power [W]	140		170	250	440					
Rated torque [Nm]	0.45		0.8		1.4					
Max. starting torque 3)	0.78	1.1	2.4	3.5	3.6					
Max. torque 4)	0.65	0.80	1.0	1.5	1.8					
Rated speed [rpm]	3000	3000	2000	3000						
No-load speed [rpm] 2)	5000	4500	2700	4300	4000					
<b>Motor data</b>										
<b>Winding</b>										
Speed constant [V/1000 rpm]	3.7	6.54	8.7	48.1	52.3					
Torque constant [Nm/A]	0.058	0.104	0.14	0.772	0.820					
R <sub>UV</sub> [Ω]	0.26	0.77	0.635	18.7	7.1					
L <sub>line</sub> [mH]	0.18	0.59	0.82	25.7	6.4					
Insulation material class	F									



### Rated data of the drive systems

Type	SDSGSSR35	SDSGSSR47	SDSGSSR56
<b>Motor data</b>			
<b>Mechanics</b>			
Moment of inertia [kgcm <sup>2</sup> ]	0.293	0.444	1.466
Flange acc. to IEC	C80		C90
Shaft end acc. to IEC 72	9 x 20		11 x 23
Locating bearing at the output end	6000		6301
Non-locating bearing	6000		6201
Max. radial force end of journal <sup>*1)</sup> [N]	250		570
Max. radial force centre of journal <sup>*1)</sup> [N]	260		620
max. axial force <sup>1)</sup> [N]	200		490
Total weight (inverter and motor)	2.8	3.7-5.0	6.0

<sup>\*1)</sup> Forces determined for bearing service life of 20,000 hrs

2) The no-load speed gives the maximum possible speed of the unloaded drive system, depending on the currently relevant supply voltage of the inverter.

3) Maximum torque at a speed of 0 rpm up to 500 rpm

4) Maximum torque at rated speed



## Rated data for S3 operation/ overload capacity

When dimensioning a drive system which is operated in S3 operation, the r.m.s. motor torque should be calculated. The r.m.s. torque is calculated from the kinematics (travel profile) and the time-dependent load profile, with the gearbox ratio, efficiency, friction losses, etc., also taken into account. It can be easily calculated using the following equation, where T represents the length of a cycle and  $M_i$  the motor torque to be achieved in the time  $t_i$ . Furthermore, a dynamic factor  $k_{\text{Dyn}}$  should be taken into account: depending on the dynamic performance of the load profile, this can assume any value between 1 (low dynamic performance) and 1.2 (high dynamic performance/significant compensation). The "Drive Solution Designer" program can be used for calculating the r.m.s. torque or dimensioning the drive systems.

$$M_{\text{rms}} = \sqrt{\frac{\sum t_i \cdot M_i^2}{T}} \cdot k_{\text{Dyn}} \leq M_r$$

The drives in the 930 fluxxtorque product range are checked in accordance with the load profile shown in Figure 1, with reference to operating mode S3. The load profile that is applied at the rated speed (cycle time: 5 s) consists of a 0.5 s peak load (150%  $M_r$ ) and a recovery time of 4.5 s (75%  $M_r$ ).

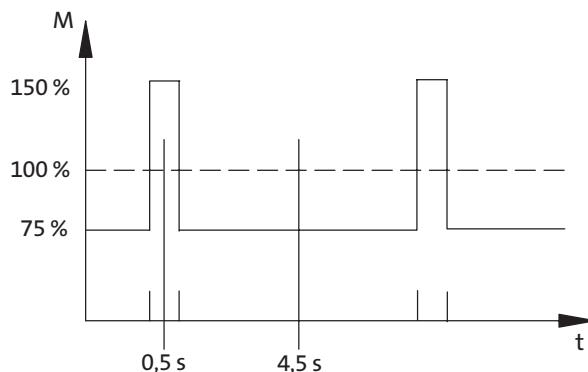


Fig. 1 Drive overload capacity at 40°C

Type	SDSGSSR35		SDSGSSR47			SDSGSSR56	
S3 operation							
Supply voltage [V]	24 *	42	42 *	230	320	230	320
Rated torque [Nm]	0.45	0.45	0.80	0.80	0.80	1.40	1.40
Max. load torque (15%) [Nm]	0.68	0.68	1.20	1.20	1.20	2.10	2.10
Recovery torque (75%) [Nm]	0.34	0.34	0.60	0.60	0.60	1.05	1.05

\* A reduced speed (1000 rpm) is used as the basis for the data.



1

**Lenze**

930 fluxxtorque Servo Drives en 1/2007

**1-15**



## General information

### Gearbox technology

#### Worm gearbox type SSN31


Ratio i	Perm. axial load $F_a$ [N]	Perm. radial load $F_r$ [N]	$M_{max.}$ [Nm]	Efficiency	Gearbox	Weight [approx. kg]
5	300(VAL,VAR,DAR) 400(HAR)	200(VAL,VAR) 2x100(DAR)	14	0.85	SSN31	0.67(VAR) 0.80(VAL) 0.68(DAR) 0.70(HAR)
7			14	0.83		
10			14	0.77		
15			16	0.74		
20			15	0.69		
25			14	0.61		
30			15	0.59		
38			16	0.57		
50			13	0.46		
55			15	0.52		
75			11	0.36		
100			11	0.38		

1

#### Worm gearbox type SSN40

Ratio i	Perm. axial load $F_a$ [N]	Perm. radial load $F_r$ [N]	$M_{max.}$ [Nm]	Efficiency	Gearbox	Weight [approx. kg]
6.75	400	600(VAL,VAR) 2x300(DAR)	35	0.84	SSN40	1.5(HAR, VAR) 1.6(DAR) 1.8(VAL)
10			35	0.81		
15			33	0.74		
20			34	0.71		
25			29	0.64		
30			36	0.62		
40			34	0.56		
50			32	0.54		
60			23	0.38		
80			24	0.39		

Gearbox	Gearbox type	Position of system blocks	
		Shaft	Flange
SSN31	VAL	3 5	3 5
	VAR	3 5	—
	DAR	8	—
	HAR	—	—
SSN40	VAL	3 5	3 5
	VAR	3 5	—
	DAR	8	—
	HAR	—	—

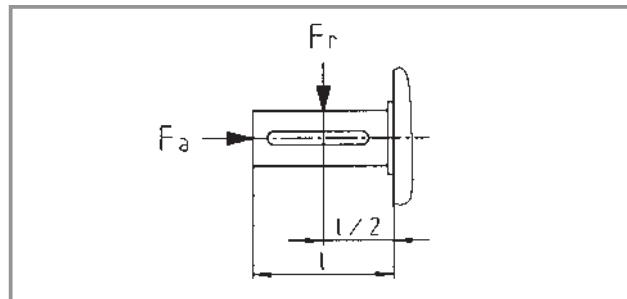



### Planetary gearbox SPL□□-□NVCR

Gearbox type	Ratio i	M max. Nm	Axial load max. F <sub>a</sub> [N]	Radial load max. F <sub>r</sub> [N]
<b>SPL52-1NVCR</b>	3.7	4	60	200
	6.75	4	60	200
<b>SPL52-2NVCR</b>	13.73	12	100	320
	25.01	12	100	320
	45.56	12	100	320
<b>SPL52-3NVCR</b>	50.89	25	150	450
	92.7	25	150	450
	168.84	25	150	450

Gearbox type	Ratio i	M max. Nm	Axial load max. F <sub>a</sub> [N]	Radial load max. F <sub>r</sub> [N]
<b>SPL62-1NVCR</b>	3.7	8	50	240
	6.75	8	50	240
<b>SPL62-2NVCR</b>	13.73	25	70	360
	25.01	25	70	360
	34.97	25	70	360
<b>SPL62-3NVCR</b>	45.56	25	70	360
	50.89	50	120	520
	71.16	50	120	520
	99.5	50	120	520
	123.97	50	120	520

Gearbox type	Ratio i	M max. Nm	Axial load max. N	Radial load max. N
<b>SPL81-1NVCR</b>	3.7	20	80	400
	6.75	20	80	400
<b>SPL81-2NVCR</b>	13.73	60	120	600
	25.01	60	120	600
	34.97	60	120	600
	45.56	60	120	600
<b>SPL81-3NVCR</b>	50.89	120	200	1000
	71.16	120	200	1000
	99.5	120	200	1000
	123.97	120	200	1000

Efficiency	
1-stage	0.8
2-stage	0.75
3-stage	0.7





## General information

### Gearbox technology

#### Helical gearbox, permissible radial and axial output forces




- ▶ Permissible radial force

$$F_{r\text{perm}} = f_w \cdot f_\alpha \cdot F_{r\text{Tab}} \leq f_w \cdot F_{r\text{max}}$$

- ▶ Permissible axial force

$$F_{a\text{perm}} = F_{a\text{Tab}} \quad \text{where } F_r = 0$$

Contact Lenze if  $F_r$  and  $F_a \neq 0$

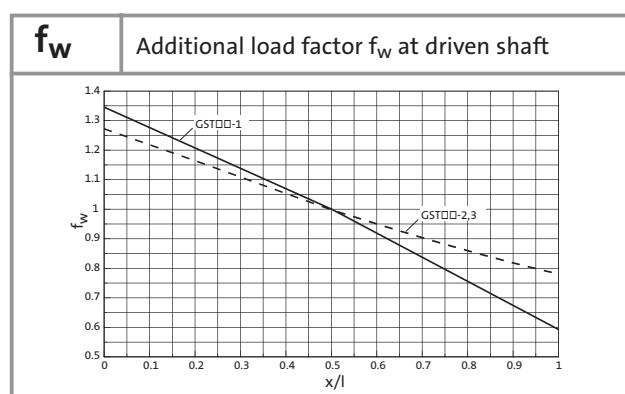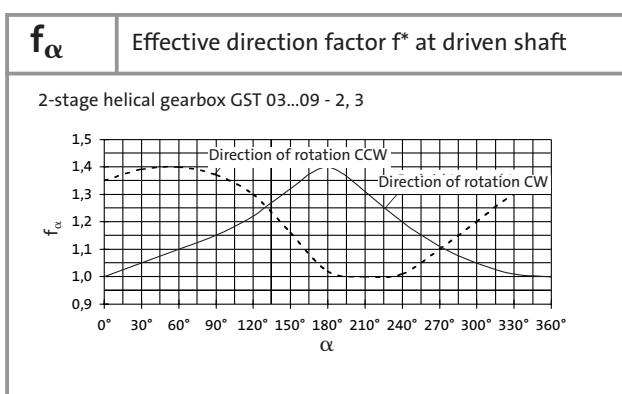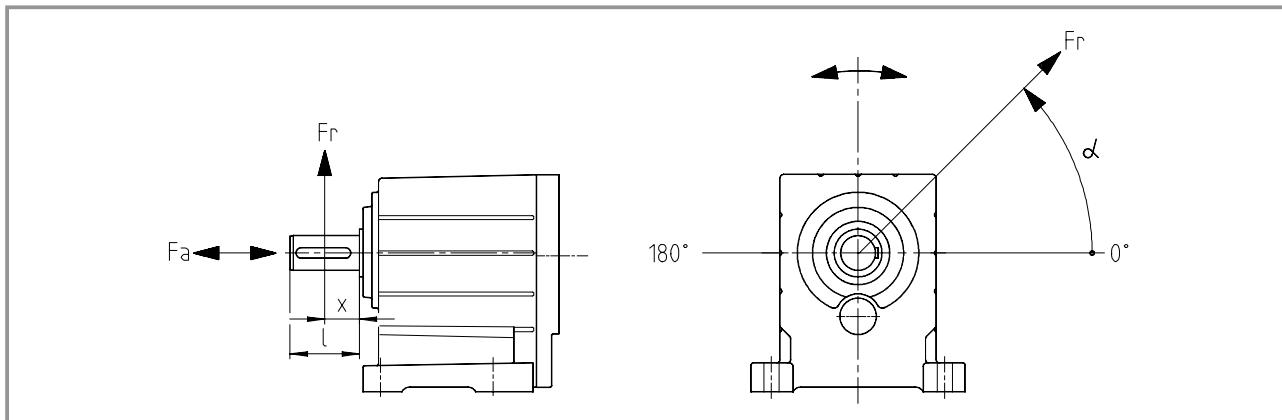



## Helical gearbox, permissible radial and axial output forces

### GST □□-1

V □□	Application of force $F_r$ : centre of shaft journal ( $x = l/2$ ) $F_{aTab}$ only valid for $F_r = 0$	
$n_2$ [rpm]	GST 04	
	$F_{rTab}$ [N]	$F_{aTab}$ [N]
1000	440	1000
600	600	1300
400	850	1400
200	1050	1400
125	1050	1400
80	1050	1400
$\leq 50$	1050	1400
$F_r \text{ max.}$	1050	—

### GST □□-2, 3 with standard bearing

V □□	Application of force $F_r$ : centre of shaft journal ( $x = l/2$ ) $F_{aTab}$ only valid for $F_r = 0$			
$n_2$ [rpm]	GST 03		GST 04	
	$F_{rTab}$ [N]	$F_{aTab}$ [N]	$F_{rTab}$ [N]	$F_{aTab}$ [N]
400	630	600	1250	1100
250	710	700	1450	1300
160	800	800	1700	1650
100	920	900	2100	2000
63	1100	1000	2500	2000
40	1400	1000	2650	2000
25	1500	1000	2650	2000
$\leq 16$	1500	1000	2650	2000
$F_r \text{ max.}$	1500	—	2650	—



## General information

### Gearbox technology

#### Bevel gearbox GKR□□, permissible radial and axial output forces


##### ► Permissible radial force

$$F_{r\text{perm}} = f_w \cdot f_\alpha \cdot F_{r\text{Tab}} \leq f_w \cdot F_{r\text{max}}$$

##### ► Permissible axial force


$$F_{a\text{perm}} = F_{a\text{Tab}} \quad \text{where } F_r = 0$$

Contact Lenze if  $F_r$  and  $F_a \neq 0$

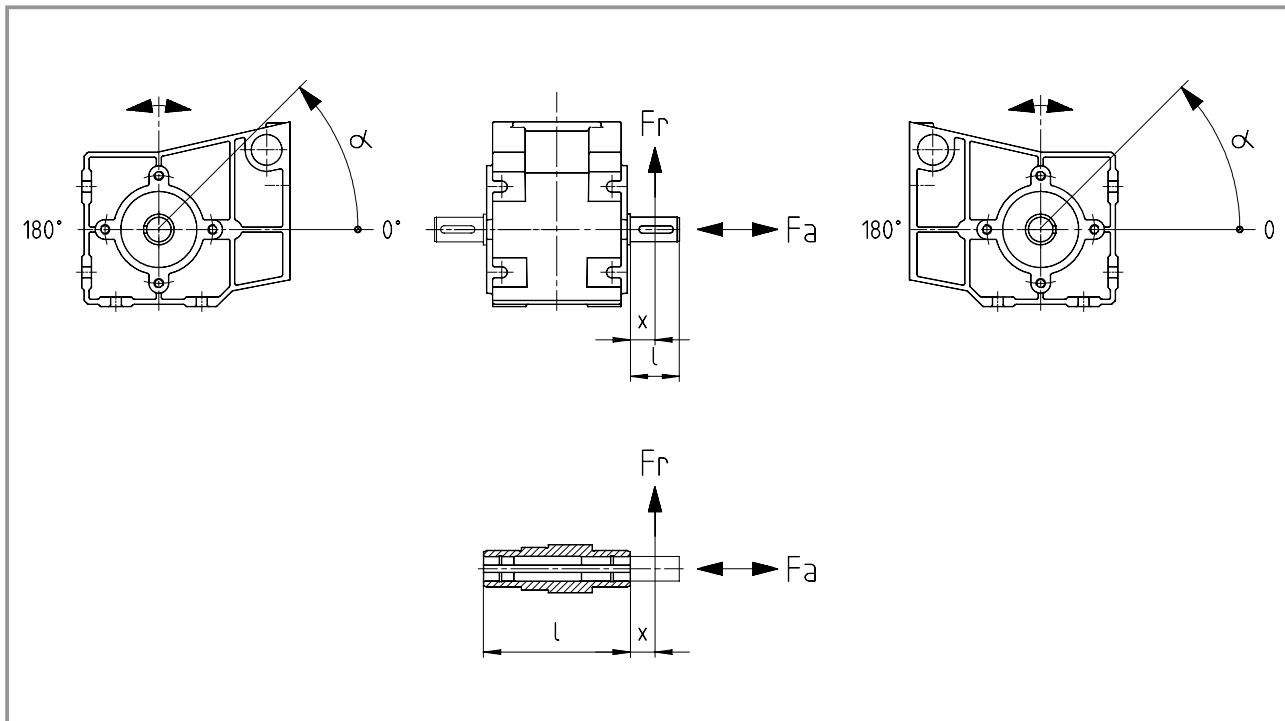


$f_\alpha$

Effective direction factor at driven shaft

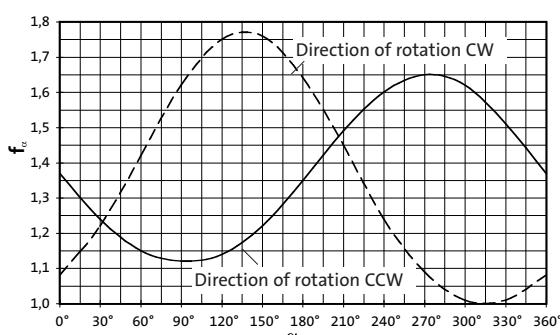

$f_w$

Additional load factor at output shaft

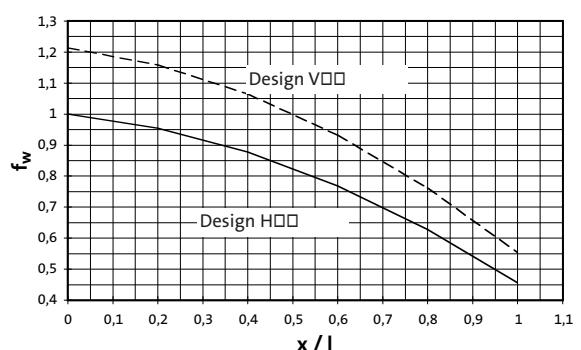




### Bevel gearbox, permissible radial and axial output forces

V00		Solid shaft without flange Application of force $F_{rTab}$ : on middle of shaft journal ( $x = l/2$ ) $F_{aTab}$ only when $F_r = 0$			
$n_2$ [rpm]		GKR 03		GKR 04	
		$F_{rTab}$ [N]	$F_{aTab}$ [N]	$F_{rTab}$ [N]	$F_{aTab}$ [N]
400	1800		1000	2100	1275
250	2100		1100	2500	1500
160	2400		1250	2700	1650
100	2800		1400	3000	1800
63	3000		1400	3000	1800
40	3000		1400	3000	1800
25	3000		1400	3000	1800
$\leq 16$	3000		1400	3000	1800
$F_{max}$	3000		—	3000	—

H00		Application of force $F_{rTab}$ : at hollow shaft end face ( $x = 0$ ) $F_{aTab}$ only when $F_r = 0$			
$n_2$ [rpm]		GKR 03		GKR 04	
		$F_{rTab}$ [N]	$F_{aTab}$ [N]	$F_{rTab}$ [N]	$F_{aTab}$ [N]
400	2200		1000	2550	1275
250	2500		1100	3000	1500
160	2800		1250	3300	1550
100	3000		1400	3600	1800
63	3000		1400	3600	1800
40	3000		1400	3600	1800
25	3000		1400	3600	1800
$\leq 16$	3000		1400	3600	1800
$F_{max}$	3000		—	3600	—



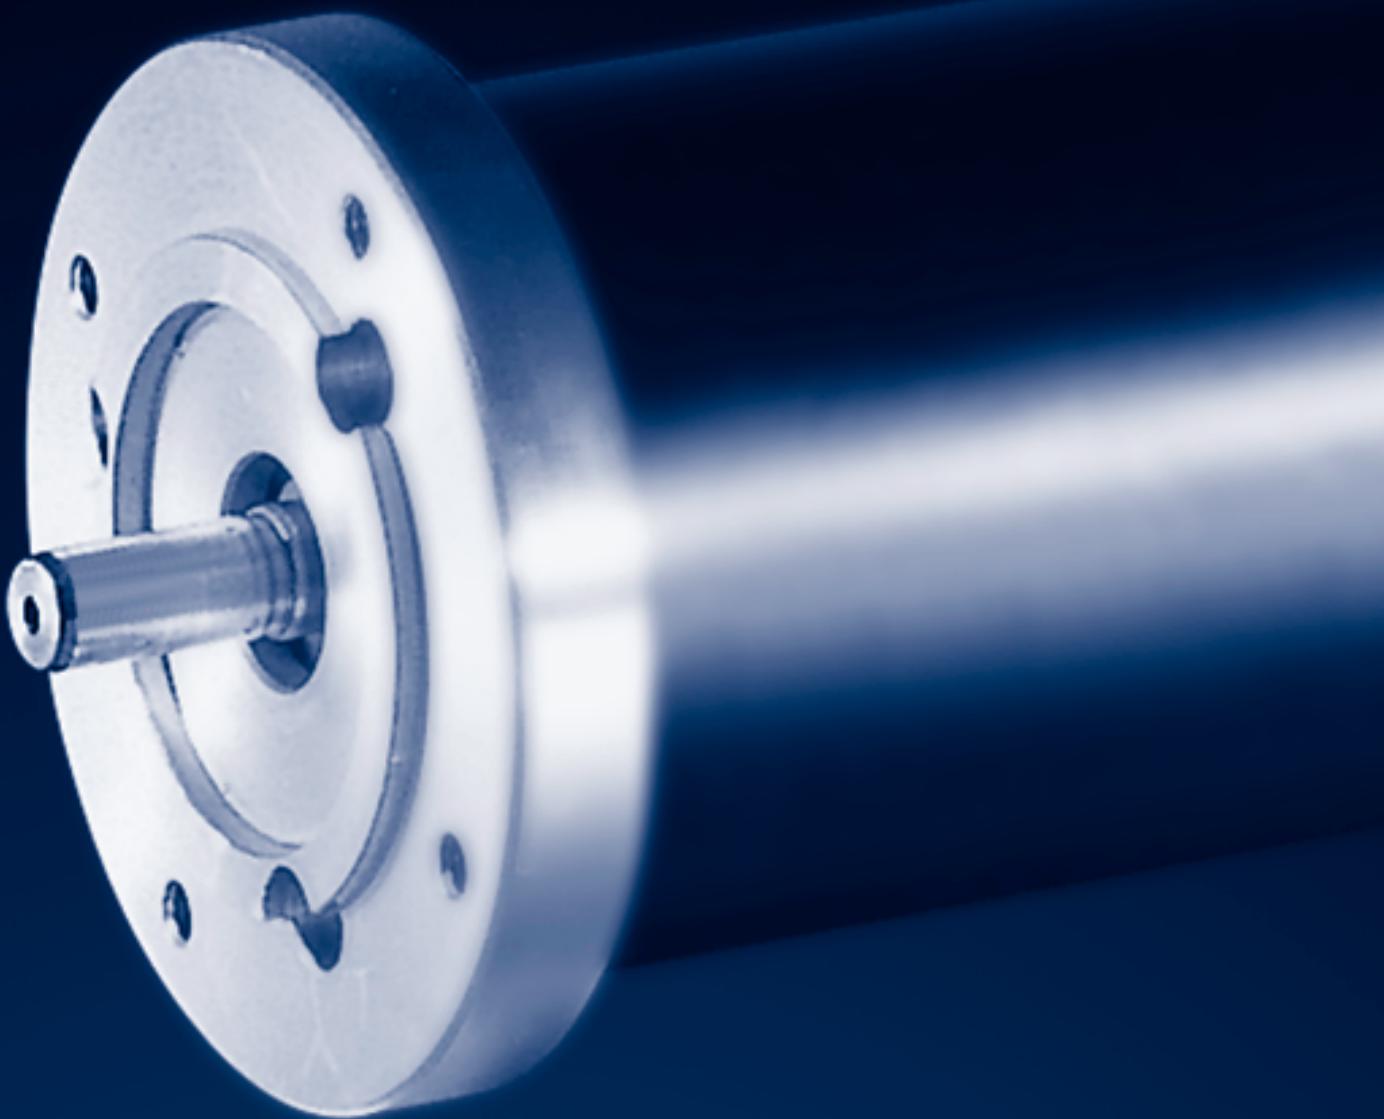

# Drive selection | 930 fluxxtorque Servo Drives

## Integrated mounting 930M servo inverter for a 24 V or 42 V DC supply voltage

SDSGS servo motors	2-2
Servo worm geared motors SSN	2-4
Servo planetary geared motors SPL	2-12
Servo helical geared motors GST	2-18
Servo bevel geared motors GKR	2-22



## Drive selection SDSGS servo motors

### Selection table, type SDSGS□□□□□-22

P <sub>r</sub> W	Rated data			Version A-side	Motor type	Selection Please tick
	n <sub>1</sub> rpm	M <sub>1</sub> Nm	U <sub>v</sub> V DC			
140	3000	0.45	24	IEC56 B14 C80	SDSGS□□035-22	
140	3000	0.45	42	IEC56 B14 C80	SDSGS□□035-22	
170	2000	0.80	42	IEC56 B14 C80	SDSGS□□047-22	
170	2000	0.80	42	IEC63 B14 C90	SDSGS□□047-22	

### Additional order information


Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Position of electrical connection		1

### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03KBO (Voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	
Power supply unit	24 V/10 A, 230 V/50 Hz	
	24 V/20 A, 230 V/50 Hz	
	48 V/10 A, 400 V/50 Hz	
	48 V/20 A, 400 V/50 Hz	



Dimensions, type SDSGS□□□□□-22

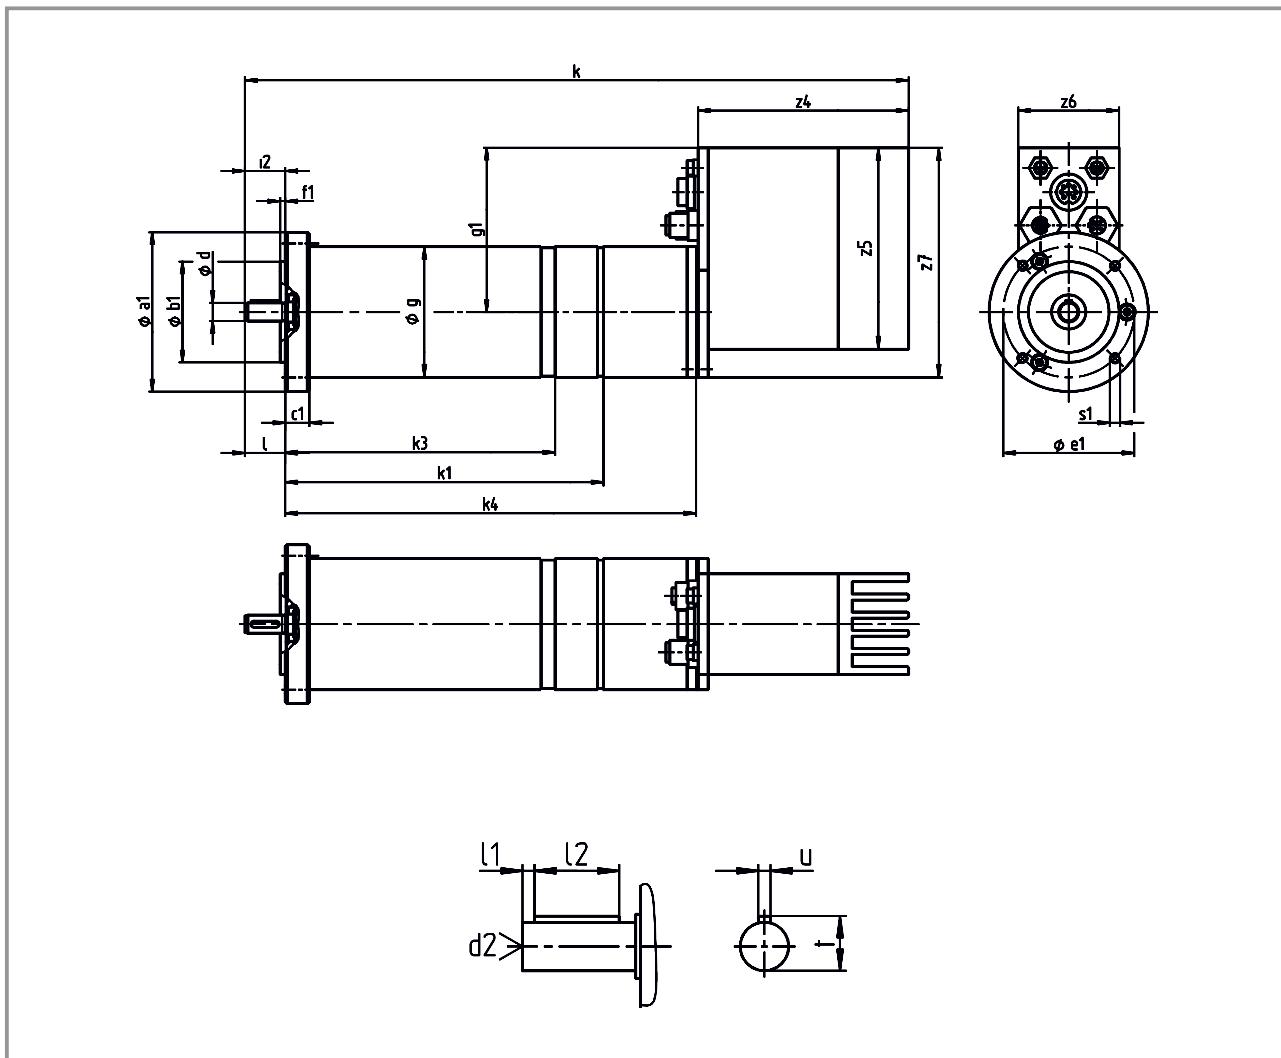

Motor type	Frame size	a1	b1	c1	d	d2	e1	f1	g	g1	i2	k	k1	k3	k4	l
SDSGSS□035-22	IEC56C80	79	50	12	9	M3	65	2.5	65	81.5	20	329.5	180	138	204	20
SDSGSS□047-22	IEC56C80	79	50	12	9	M3	65	2.5	75	86.5	20	358	200	156	232.5	20
SDSGSS□047-22	IEC63C90	89	60	12	11	M4	75	2.5	75	86.5	23	361	200	156	232.5	23

Motor type	Frame size	l1	l2	s1	t	u	z4	z5	z6	z7	Weight [kg]				
SDSGSS□035-22	IEC56C80	3	14	M5	10.2	3	105.5	100	50	114	2.8-3.3				
SDSGSS□047-22	IEC56C80	3	14	M5	10.2	3	105.5	100	50	124	3.7-4.3				
SDSGSS□047-22	IEC63C90	3	18	M5	12.5	4	105.5	100	50	124	3.7-4.3				

Dimensions in mm



## Drive selection

### Servo worm geared motors SSN

#### Selection table, type SSN31-1G□□□-035C22

P <sub>r</sub> W	Supply voltage Servo Drive 24 V or 42 V DC			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
140	600	1.91	7.32	5		
	429	2.61	5.35	7	SDSGS□□035-22	
	300	3.47	4.04	10		
	200	5.00	3.2	15		
	150	6.21	2.42	20		
	120	6.86	2.04	25		
	100	7.97	1.88	30		
	79	9.75	1.64	38		
	60	10.35	1.26	50		
	55	12.87	1.17	55		
	40	11.00	0.91	75		
	30	11.00	0.64	100		

#### Additional order information


Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VAR	
	DAR	
	VAL	
	HAR	
	VCR	
	DCR	
	VCL	
	HCR	
Shaft position on version VAR/VCR		3 5 8
Flange/shaft position on version VAL/VCL		3 5 8
Mounting position		A B C D E F
Position of electrical connection		2 3 4 5

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03KBO (Voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	
Power supply unit	24 V/10 A, 230 V/50 Hz	
	24 V/20 A, 230 V/50 Hz	
	48 V/10 A, 400 V/50 Hz	
	48 V/20 A, 400 V/50 Hz	



Dimensions, type SSN31-1G□□□-035C22

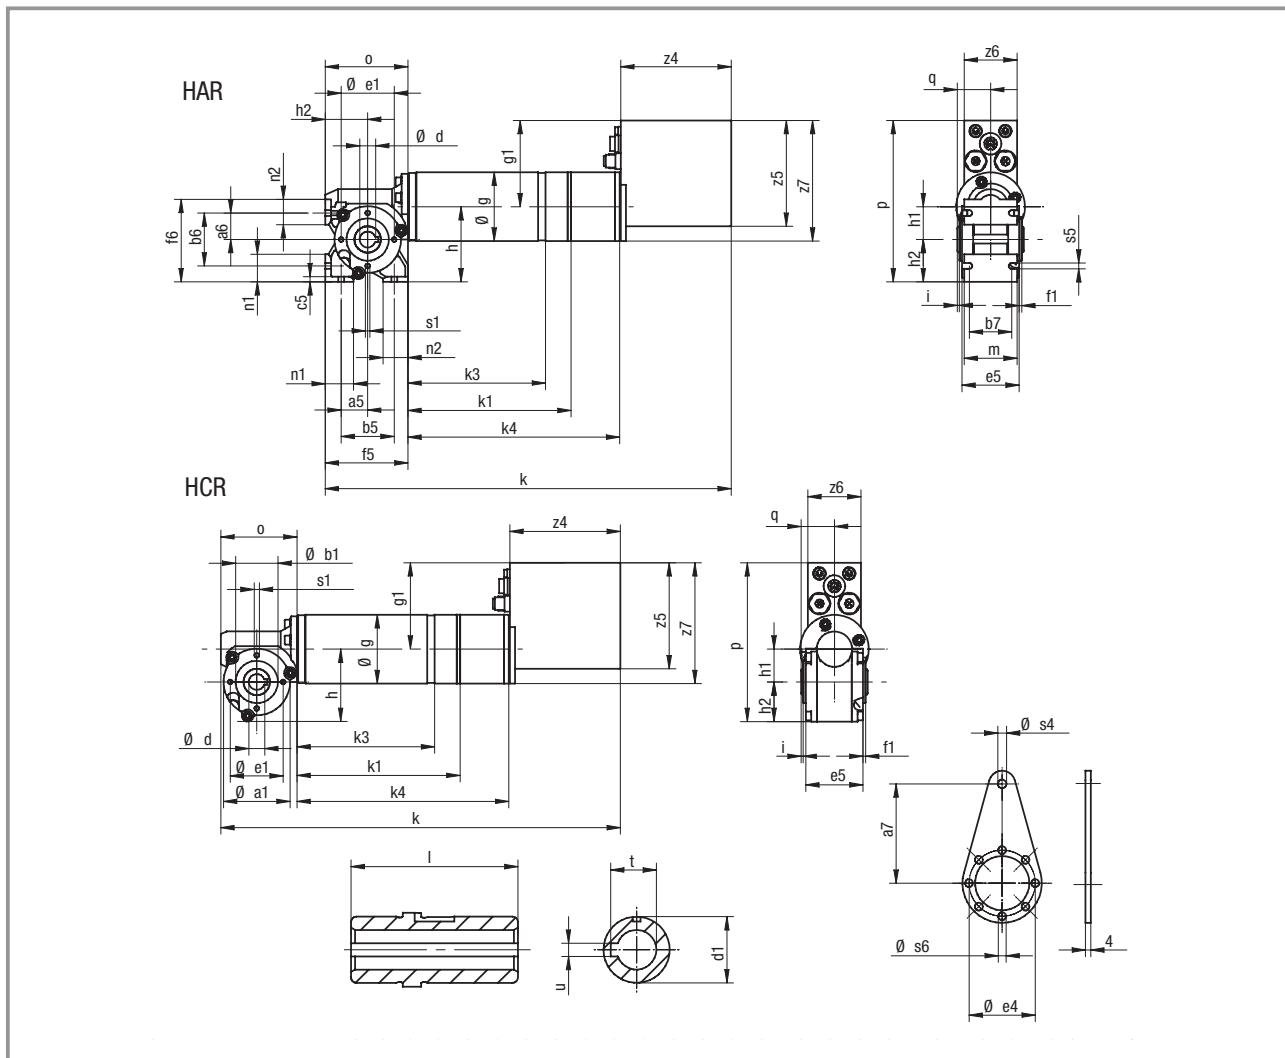

Geared motor	a1	a5	a6	a7	b1	b5	b6	b7	c5	d H7	d1	e1	e4	e5	f1	f5	f6	g	g1	h	h1	h2	i	k SB
SSN31-1GHAR-035C22	63	25	25	75	40	50	50	40	5	15	25	50	50	54	2.5	78	78	65	81.5	71	31	40	2	383.5
SSN31-1GHCR-035C22	63	-	-	75	40	-	-	-	-	15	25	50	50	54	2.5	-	-	65	81.5	68.5	31	37.5	2	377.5

Geared motor	k1 SR	k3 XX	k4 SB	l	m	n1	n2	o	p	q	s1	s4	s5	s6	t	u	z4	z5	z6	z7	Weight [kg]	
SSN31-1GHAR-035C22	176	134	200	63	50	26	24	78	155.5	27	M5	6.5	5.5	6	17.3	5	105.5	100	50	114	3.1-4.2	
SSN31-1GHCR-035C22	176	134	200	63	50	-	-	72	153	27	M5	6.5	-	6	17.3	5	105.5	100	50	114		


Dimensions in mm



## Drive selection

### Servo worm geared motors SSN

Dimensions Type SSN31-1G□□□-035C22

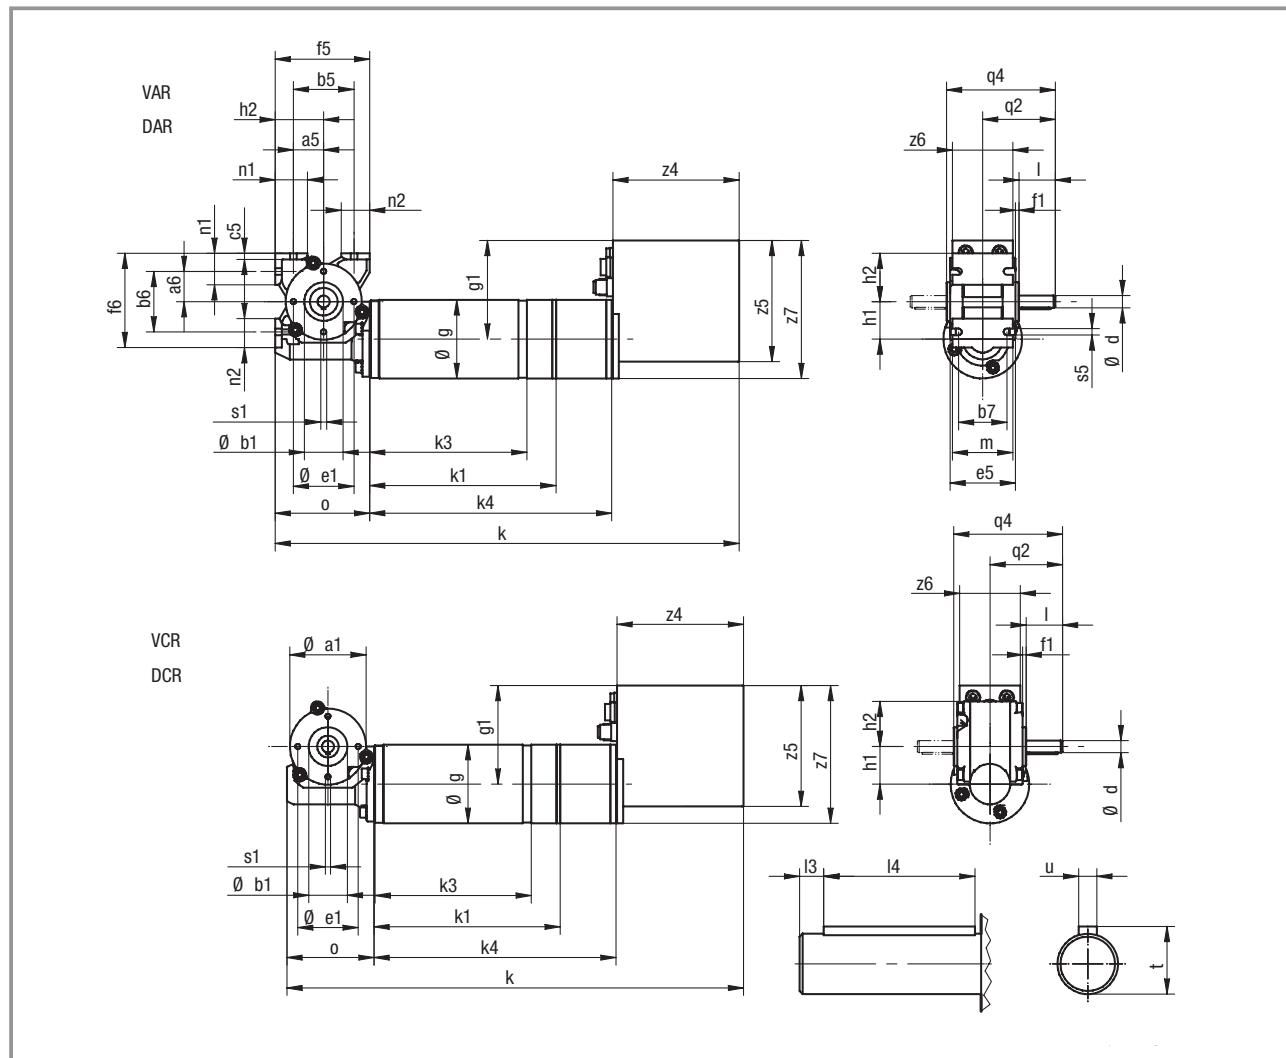


Geared motor	a1	a5	a6	b1 h8	b5	b6	b7	c5	d h6	e1	e5	f1	f5	f6	g	g1	h1	h2	k SB	k1 SR
SSN31-1GVAR-035C22	63	25	25	32	50	50	40	5	10	50	54	2.5	78	78	65	81.5	31	40	383.5	176
SSN31-1GVAR-035C22	63	25	25	32	50	50	40	5	12	50	54	2.5	78	78	65	81.5	31	40	383.5	176
SSN31-1GVCR-035C22	63	-	-	32	-	-	-	-	10	50	54	2.5	-	-	65	81.5	31	37.5	377.5	176
SSN31-1GVCR-035C22	63	-	-	32	-	-	-	-	12	50	54	2.5	-	-	65	81.5	31	37.5	377.5	176

Geared motor	k3 XX	k4 SB	l	l3	l4	m	n1	n2	o	q2	q4	s1	s5	t	u	z4	z5	z6	z7	Weight [kg]
SSN31-1GVAR-035C22	134	200	30	4	25	50	26	24	78	60	90	M5	5.5	11.2	3	105.5	100	50	114	3.1-4.2
SSN31-1GVAR-035C22	134	200	40	4	28	50	26	24	78	70	100	M5	5.5	13.5	4	105.5	100	50	114	3.1-4.2
SSN31-1GVCR-035C22	134	200	30	4	25	-	-	-	72	60	90	M5	-	11.2	3	105.5	100	50	114	3.1-4.2
SSN31-1GVCR-035C22	134	200	40	4	28	-	-	-	72	70	100	M5	-	13.5	4	105.5	100	50	114	3.1-4.2

Dimensions in mm

Dimensions Type SSN31-1G□□□-035C22

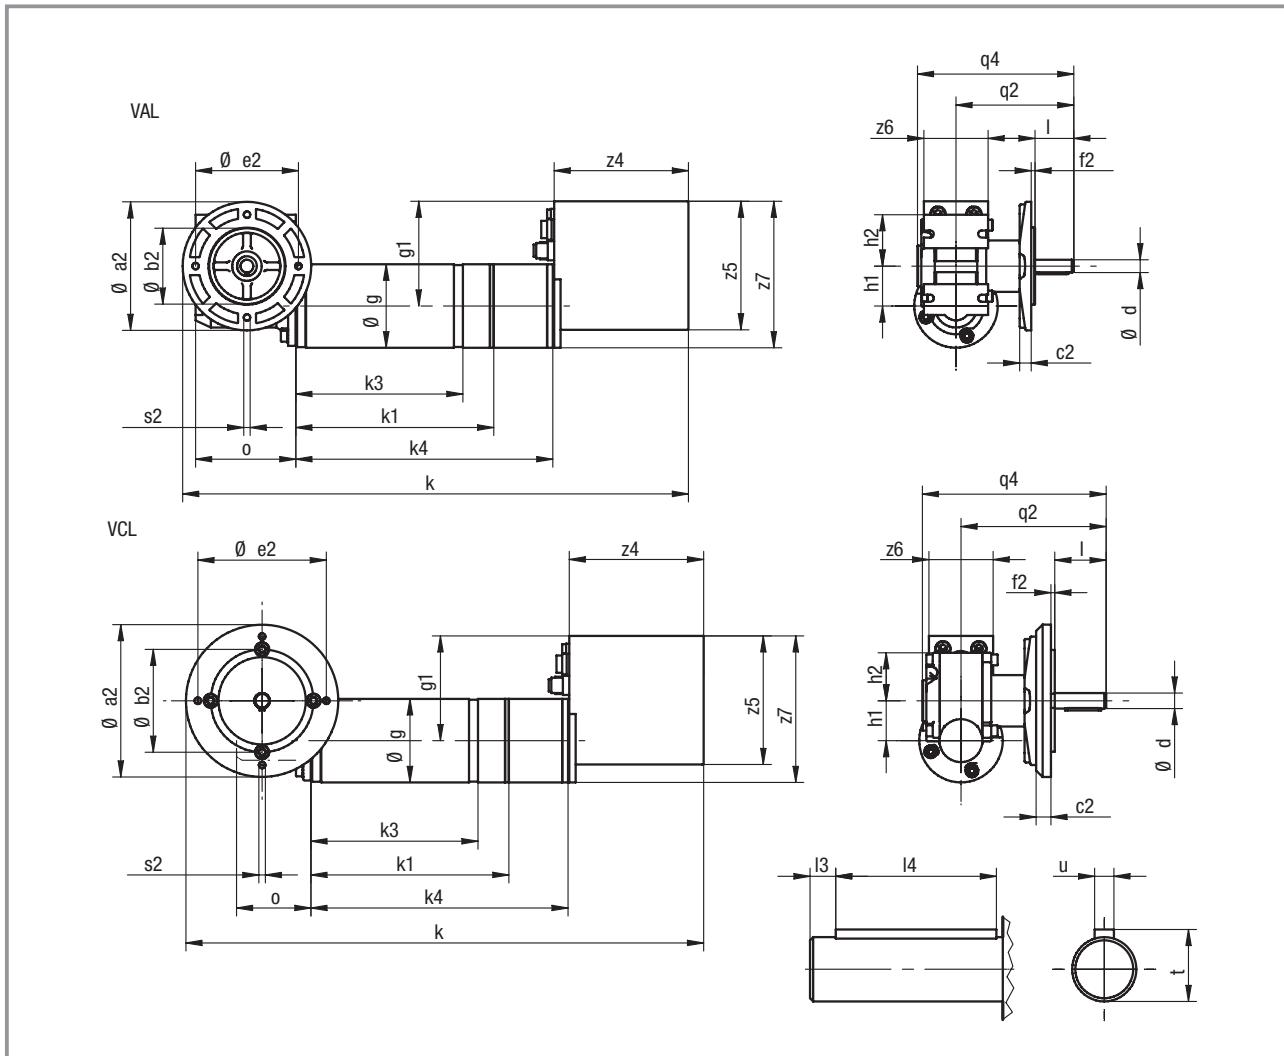

Geared motor	$a2$	$b2$ $j7$	$c2$	$d$ $h6$	$e2$	$f2$	$g$	$g1$	$h1$	$h2$	$k$ $SB$	$k1$ $SR$	$k3$ $XX$
SSN31-1GVAL-035C22	100	60	9	10	80	3	65	81.5	31	40	393.5	176	134
SSN31-1GVAL-035C22	120	80	9	12	100	3	65	81.5	31	40	403.5	176	134
SSN31-1GVCL-035C22	100	60	9	10	80	3	65	81.5	31	37.5	393.5	176	134
SSN31-1GVCL-035C22	118.5	80	11.5	12	100	3	65	81.5	31	37.5	403.5	176	134

Geared motor	$k4$ $SB$	$l$	$l3$	$l4$	$o$	$q2$	$q4$	$s2$	$t$	$u$	$z4$	$z5$	$z6$	$z7$	Weight [kg]
SSN31-1GVAL-035C22	200	30	4	25	78	91,5	121,5	M6	11,2	3	105,5	100	50	114	3,1-4,2
SSN31-1GVAL-035C22	200	40	4	28	78	101,5	131,5	M6	13,5	4	105,5	100	50	114	3,1-4,2
SSN31-1GVCL-035C22	200	30	4	25	72	91,5	121,5	M6	11,2	3	105,5	100	50	114	3,1-4,2
SSN31-1GVCL-035C22	200	40	4	28	72	113	143	M6	13,5	4	105,5	100	50	114	3,1-4,2

Dimensions in mm



## Drive selection

### Servo worm geared motors SSN

#### Selection table, type SSN40-1G□□□-047C22

P <sub>r</sub> W	Supply voltage Servo Drive 42 V DC			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
170	246	4.57	7.66	6.75		
	200	6.48	5.40	10	SDSGS□□047-22	
	133	8.88	3.72	15		
	100	11.36	2.99	20		
	80	12.80	2.27	25		
	67	14.88	2.42	30		
	50	17.92	1.90	40		
	40	21.60	1.48	50		
	33	18.24	1.75	60		
	25	24.00	0.96	80		


#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VAR	
	DAR	
	VAL	
	HAR	
	VCR	
	DCR	
	VCL	
	HCR	
Shaft position on version VAR/VCR		3 5 8
Flange/shaft position on version VAL/VCL		3 5 8
Mounting position		A B C D E F
Position of electrical connection		2 3 4 5

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03KBO (Voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	
Power supply unit	48 V/10 A, 400 V/50 Hz	
	48 V/20 A, 400 V/50 Hz	

Dimensions, type SSN40-1G□□□-047C22

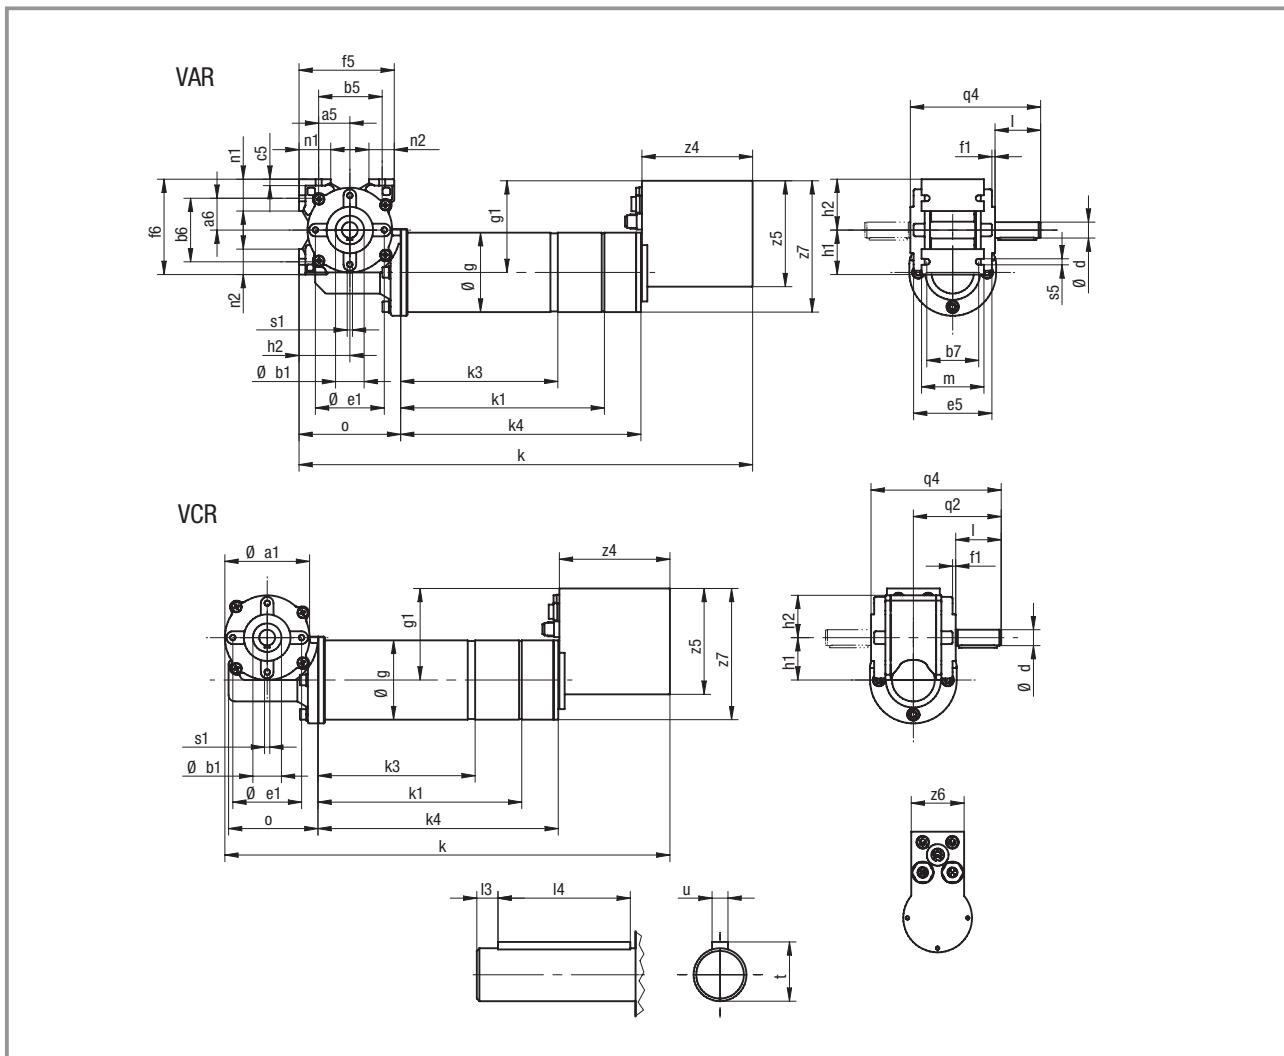

Geared motor	a1	a5	a6	b1	b5	b6	b7	c5	d	e1	e5	f1	f5	f6	g	g1	h1	h2	k	k1
	SB			h10				h6											SB	SR
SSN40-1GVAR-047C22	77	30	30	44	60	60	50	6	15	65	80	2	90	90	75	86.5	40	48	428.5	194.5
SSN40-1GVCR-047C22	77	-	-	44	-	-	-	-	15	65	80	2	-	-	75	86.5	40	40	420.5	194.5


k3	k4	l	l3	l4	m	n1	n2	o	q2	q4	s1	s5	t	u	z4	z5	z6	z7	Weight [kg]	
XX	SB																			
150.5	227	43	4	36	59	30	24	96	83	123	M6	5.5	17	5	105.5	100	50	124	5.0-6.3	
150.5	227	43	4	36	-	-	-	88	83	123	M6	-	17	5	105.5	100	50	124	5.0-6.3	

Dimensions in mm



**Drive selection**  
Servo worm geared motors SSN

Selection table, type SSN40-1G□□□-047C22

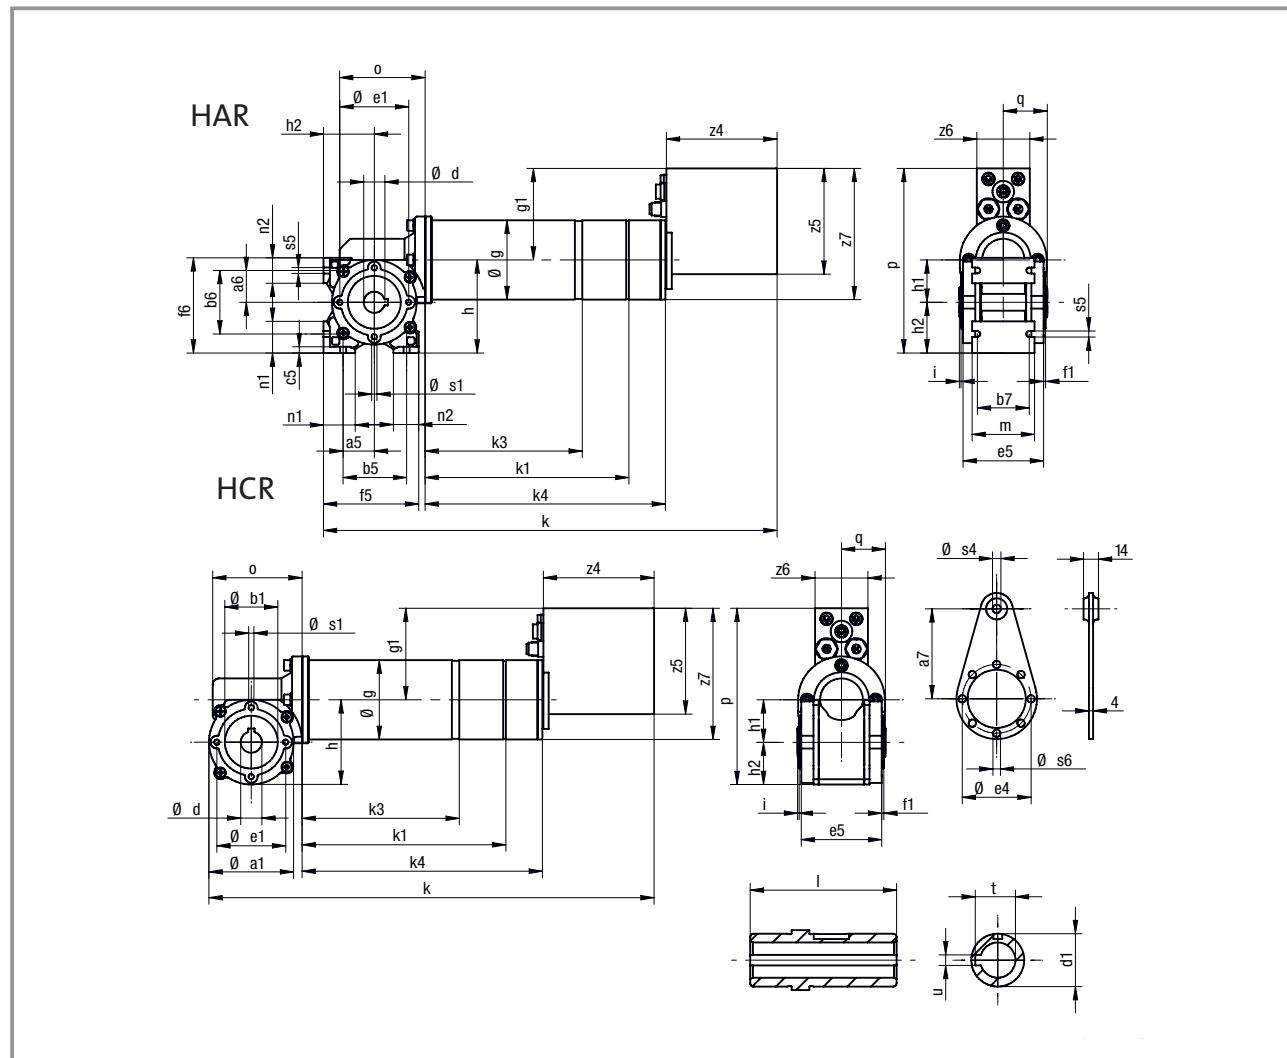


Geared motor	a1	a5	a6	a7	b1	b5	b6	b7	c5	d	d1	e1	e4	e5	f1	f5	f6	g	g1	h	h1	h2	i
SSN40-1GHAR-047C22	77	30	30	85	50	60	60	50	6	20	30	65	65	80	2	90	90	75	86.5	88	40	48	1.5
SSN40-1GHCR-047C22	77	-	-	85	50	-	-	-	-	20	30	65	65	80	2	-	-	75	86.5	80	48	40	1.5

k SB	k1 SR	k3 XX	k4 SB	I	m	n1	n2	o	p	q	s1	s4	s5	s6	t	u	z4	z5	z6	z7	Weight [kg]
428.5	194.5	150.5	227	83	59	30	24	96	194	41.5	M6	8	5.5	7	22.8	6	105.5	100	50	124	5.0-6.3
420.5	194.5	150.5	227	83	-	-	-	88	186	41.5	M6	8	-	7	22.8	6	105.5	100	50	124	5.0-6.3

Dimensions in mm



Selection table, type SSN40-1G□□□-047C22

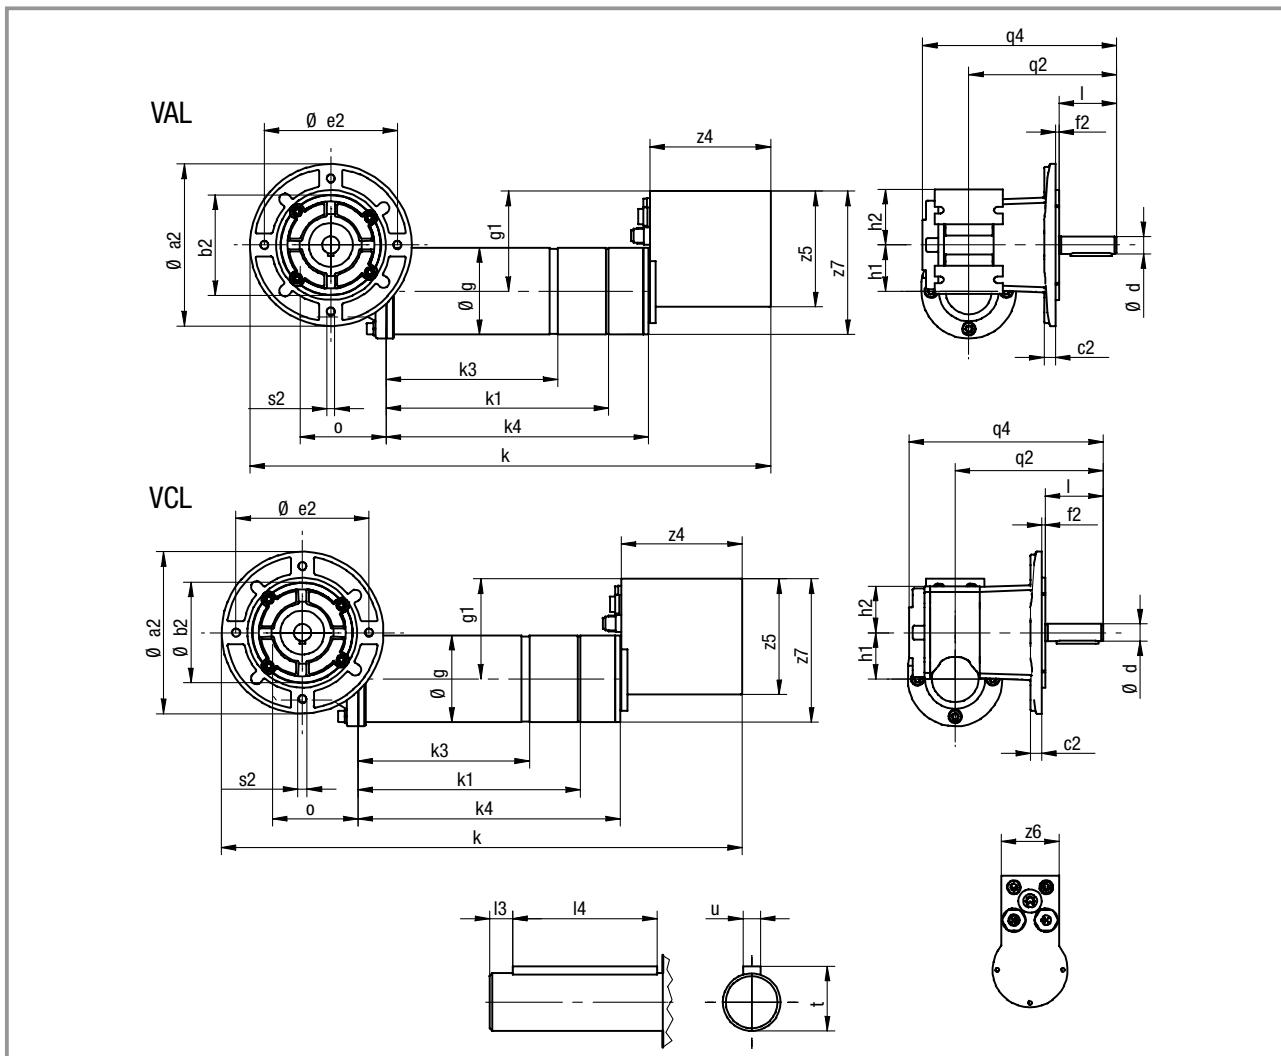

Geared motor	a2	b2	c2	d	e2	f2	g	g1	h1	h2	k	k1	k3	k4	l
		j7		h6							SB	SR	XX	SB	
SSN40-1GVAL-047C22	140	95	10	15	115	3	75	86.5	40	48	450.5	194.5	150.5	227	50
SSN40-1GVCL-047C22	140	95	10	15	115	3	75	86.5	40	40	450.5	194.5	150.5	227	50

Geared motor	I3	I4	o	q2	q4	s2	t	u	z4	z5	z6	z7	Weight
SSN40-1GVAL-047C22	4	36	96	128	168	M8	17	5	105.5	100	50	124	5.0-6.3
SSN40-1GVCL-047C22	4	36	88	128	168	M8	17	5	105.5	100	50	124	5.0-6.3

Dimensions in mm



## Drive selection

### Servo planetary geared motors SPL

#### Selection table, type SPL52-□GVCR-035N22

P <sub>r</sub> W	Supply voltage Servo Drive 24 V or 42 V DC			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
140	811	1.33	3.00	3.70	SDSGS□□035-22	
	444	2.43	1.65	6.75		
	218	4.63	2.59	13.73		
	120	8.44	1.42	25.01		
	66	15.38	0.78	45.56		
	59	16.03	1.56	50.89		
	32	25.00	0.86	92.70		

#### Additional order information


Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Position of electrical connection		1

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03KBO (Voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	
Power supply unit	24 V/10 A, 230 V/50 Hz	
	24 V/20 A, 230 V/50 Hz	
	48 V/10 A, 400 V/50 Hz	
	48 V/20 A, 400 V/50 Hz	



Dimensions, type SPL52-□GVCR-035N22

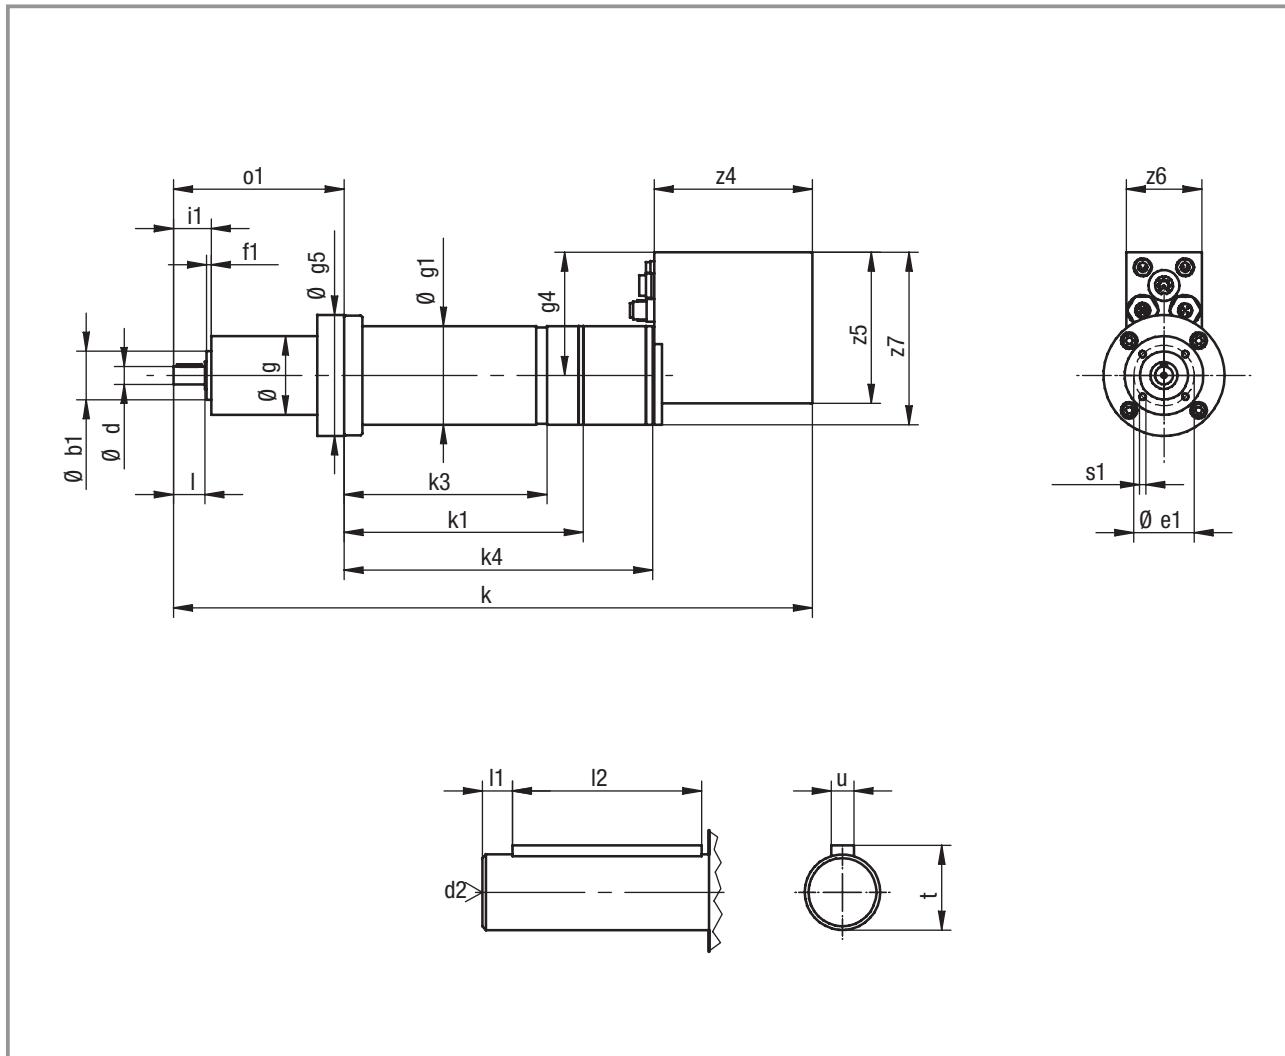

Geared motor	Ratio i	b1 h8	d h7	d2	e1	f1	g	g1	g4	g5	i1	k SB	k1 SR
SPL52-□GVCR-035N22	3.7;6.7											408.5	
	14...46	32	12	M4	40	3	52	65	81.5	80	25	422.5	180
	51...93											436.5	

k3 XX	k4 SB	l	l1	l2	o1	s1	t	u	z4	z5	z6	z7	Weight [kg]
					99								3.1-4.1
138	204	20.8	2.5	16	113	M5x10	13.5	4	105.5	100	50	114	3.3-4.3
					127								3.5-4.5

Dimensions in mm



## Drive selection

### Servo planetary geared motors SPL

#### Selection table, type SPL62-□GVCR-047N22

W P <sub>r</sub> rpm	Supply voltage Servo Drive 42 V DC			i	Motor type Please tick	Selection
	n <sub>2</sub> Nm	M <sub>2</sub>	c			
170	541	2.37	3.38	3.70		
	296	4.32	1.85	6.75	SDSGS□□047-22	
	146	8.24	3.03	13.73		
	80	15.01	1.67	25.01		
	57	20.98	1.19	34.97		
	44	25.00	0.91	45.56		
	39	28.50	1.75	50.89		
	28	39.85	1.25	71.16		

#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Position of electrical connection		1


2

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03KBO (Voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	
Power supply unit	48 V/10 A, 400 V/50 Hz	
	48 V/20 A, 400 V/50 Hz	



Dimensions, type SPL62-□GVCR-047N22

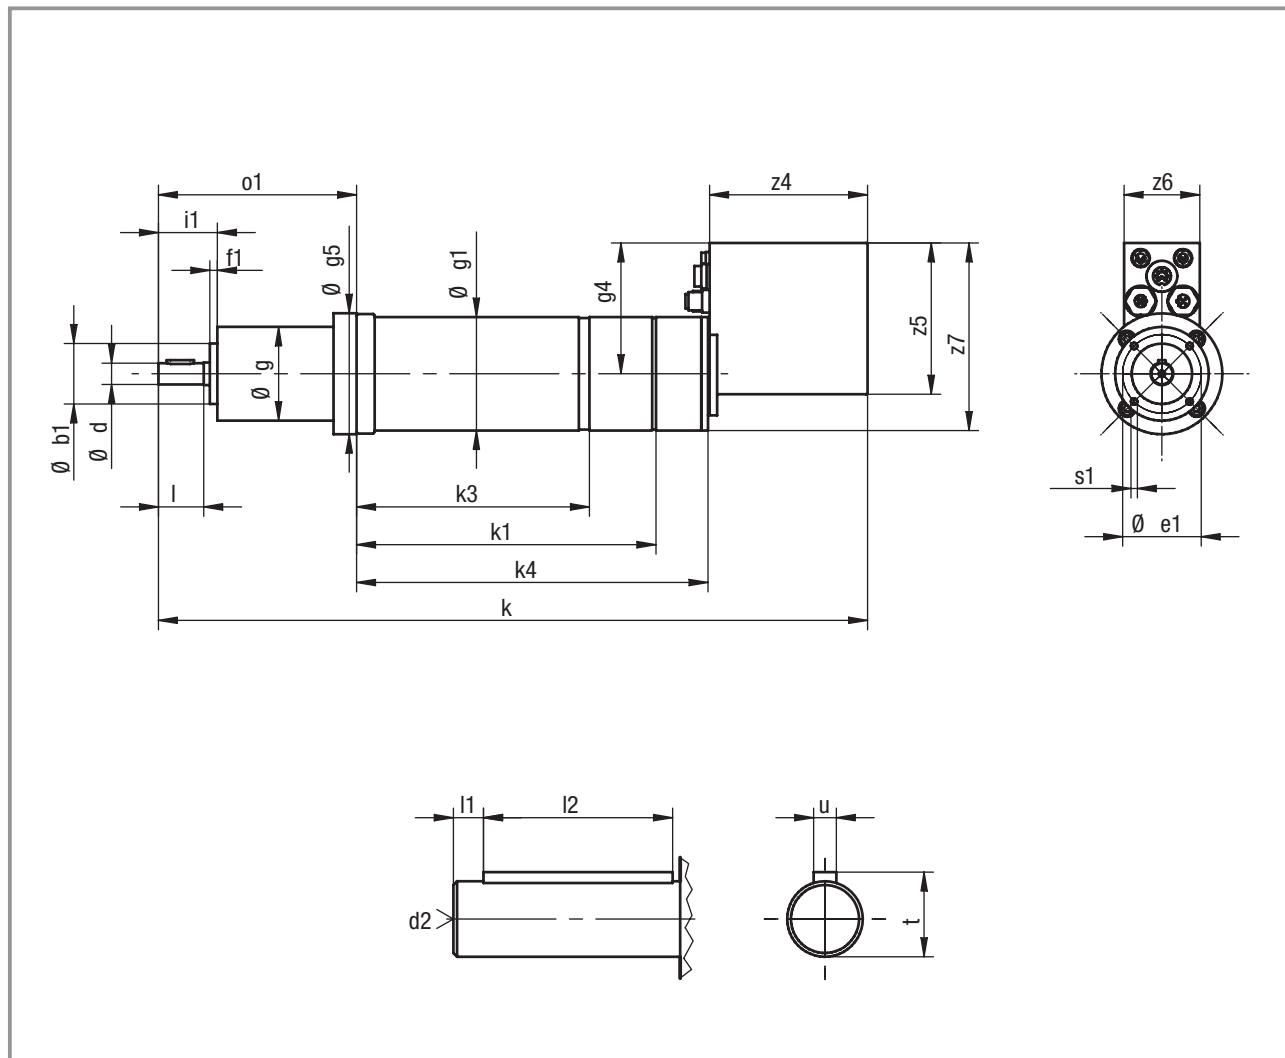

2

Geared motor	Ratio i	b1 j7	d h7	d2	e1	f1	g	g1	g4	g5	i1	k SB	k1 SR
SPL62-□GVCR-047N22	3.7;6.7											453.5	
	14...46	40	14	M5	52	5	62	75	86.5	80	39	469.5	200
	51...71											485.5	

k3 XX	k4 SB	l	l1	l2	ø1	s1	t	u	z4	z5	z6	z7	Weight
					115								4.3-5.3
156	233	30	5.5	18	131	M5x10	16	5	105.5	100	50	124	4.7-5.7
					147								5.1-6.1

Dimensions in mm



## Drive selection

### Servo planetary geared motors SPL

#### Selection table, type SPL81-□GVCR-047N22

P <sub>r</sub> W	Supply voltage Servo Drive 42 V DC			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
170	541	2.37	8.45	3.70	SDSGS□□047-22	
	296	4.32	4.63	6.75		
	146	8.24	7.28	13.73		
	80	15.01	4.00	25.01		
	57	20.98	2.86	34.97		
	44	27.34	2.19	45.56		
	39	28.50	4.21	50.89		
	28	39.85	3.01	71.16		
	20	55.72	2.15	99.50		
	16	69.42	1.73	123.97		

#### Additional order information


Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Position of electrical connection		1

2

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03KBO (Voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	
Power supply unit	48 V/10 A, 400 V/50 Hz	
	48 V/20 A, 400 V/50 Hz	

Dimensions, type SPL81-□GVCR-047N22

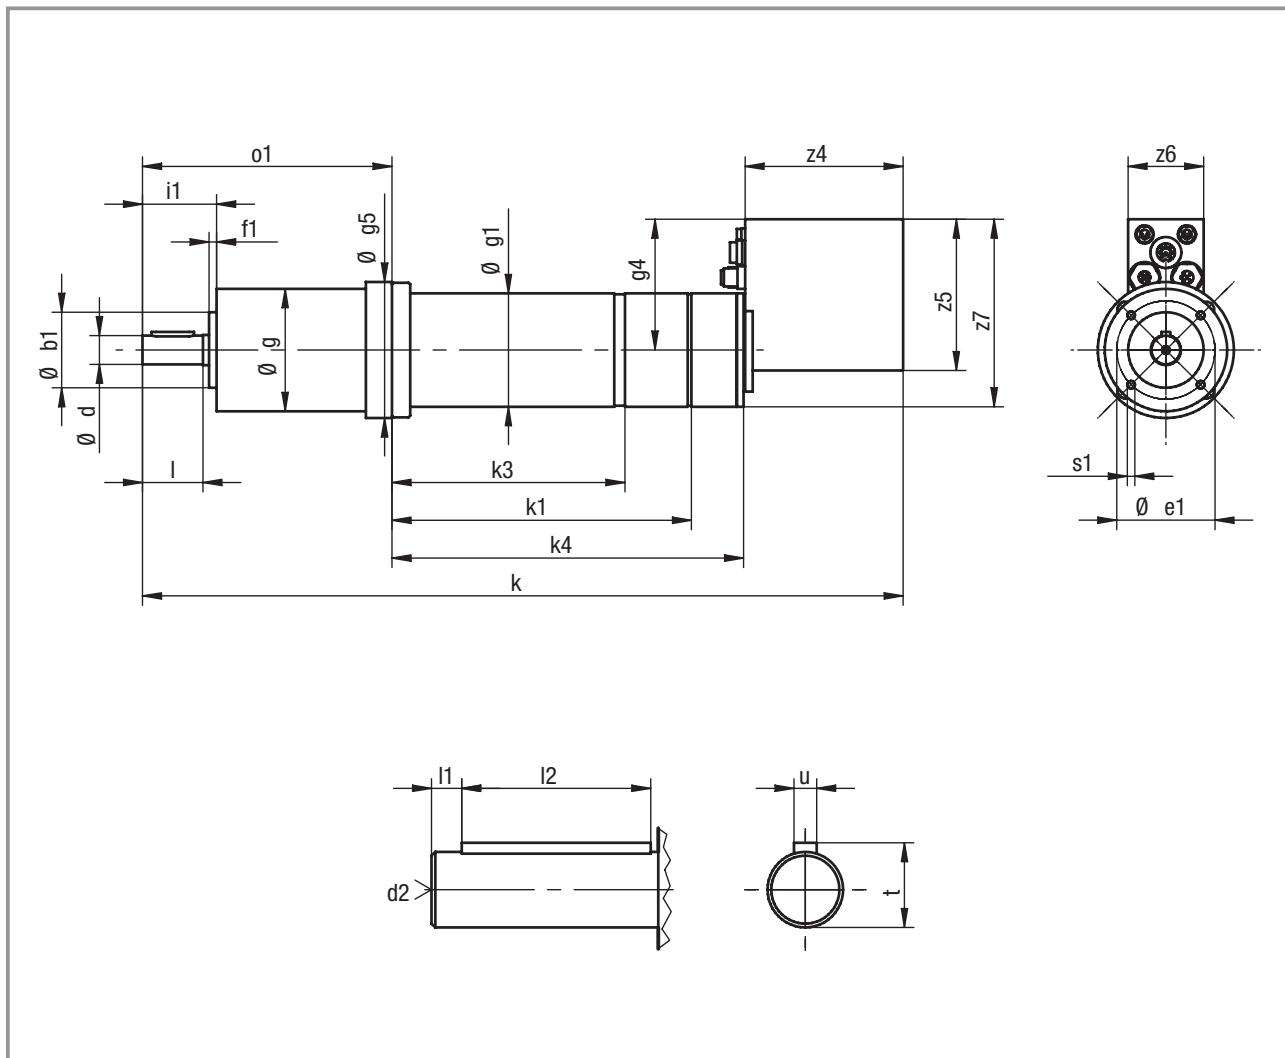

Geared motor	Ratio i	b1 j7	d h7	d2	e1	f1	g	g1	g4	g5	i1	k SB	k1 SR
SPL81-□GVCR-047N22	3.7;6.7											482.5	
	14...46	50	19	M6	65	5	81	75	86.5	90	49	503.5	200
	51...124											525.5	

k3 XX	k4 SB	I	l1	l2	o1	s1	t	u	z4	z5	z6	z7	Weight [kg]
					144								6.5-8.1
156	233	40	6	28	165	M6x12	21.5	6	105.5	100	50	124	7.3-8.8
					187								8.0-9.5

Dimensions in mm



## Drive selection

### Servo helical geared motors GST

#### Selection table, type GST03-2GV□□-035C22

P <sub>r</sub> W	Supply voltage Servo Drive 24 V or 42 V DC			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
140	1155.20	1.00	13.37	2.597	SDSGS□□035-22	
	879.00	1.00	10.85	3.413		
	686.80	2.00	9.01	4.368		
	564.80	2.00	9.59	5.312		
	502.90	3.00	8.93	5.965		
	429.70	3.00	7.96	6.982		
	382.70	3.00	7.68	7.840		
	335.80	4.00	6.74	8.935		
	299.00	4.00	6.46	10.033		
	262.50	5.00	5.87	11.429		
	233.80	6.00	5.59	12.833		
	202.20	6.00	4.99	14.836		
	180.10	7.00	5.28	16.660		
	157.80	8.00	4.75	19.013		
	140.50	9.00	4.45	21.350		
	122.00	11.00	3.95	24.595		
	108.60	12.00	3.52	27.618		
	93.80	14.00	3.04	32.000		
	83.50	16.00	2.71	35.933		
	72.40	18.00	2.35	41.455		
	64.40	20.00	2.24	46.550		
	56.70	23.00	1.97	52.909		
	50.50	26.00	1.75	59.413		

#### Additional order information


Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VBR	
	VCR	
	VCK	
Output-side flange diameter	D = 120 mm	
	D = 140 mm	
	D=160 mm	
Mounting position	A B C D E F	
Position of electrical connection	2 3 4 5	

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03KBO (Voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MK503UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	
Power supply unit	24 V/10 A, 230 V/50 Hz	
	24 V/20 A, 230 V/50 Hz	
	48 V/10 A, 400 V/50 Hz	
	48 V/20 A, 400 V/50 Hz	



Dimensions, type GST03-2GV□□-035C22

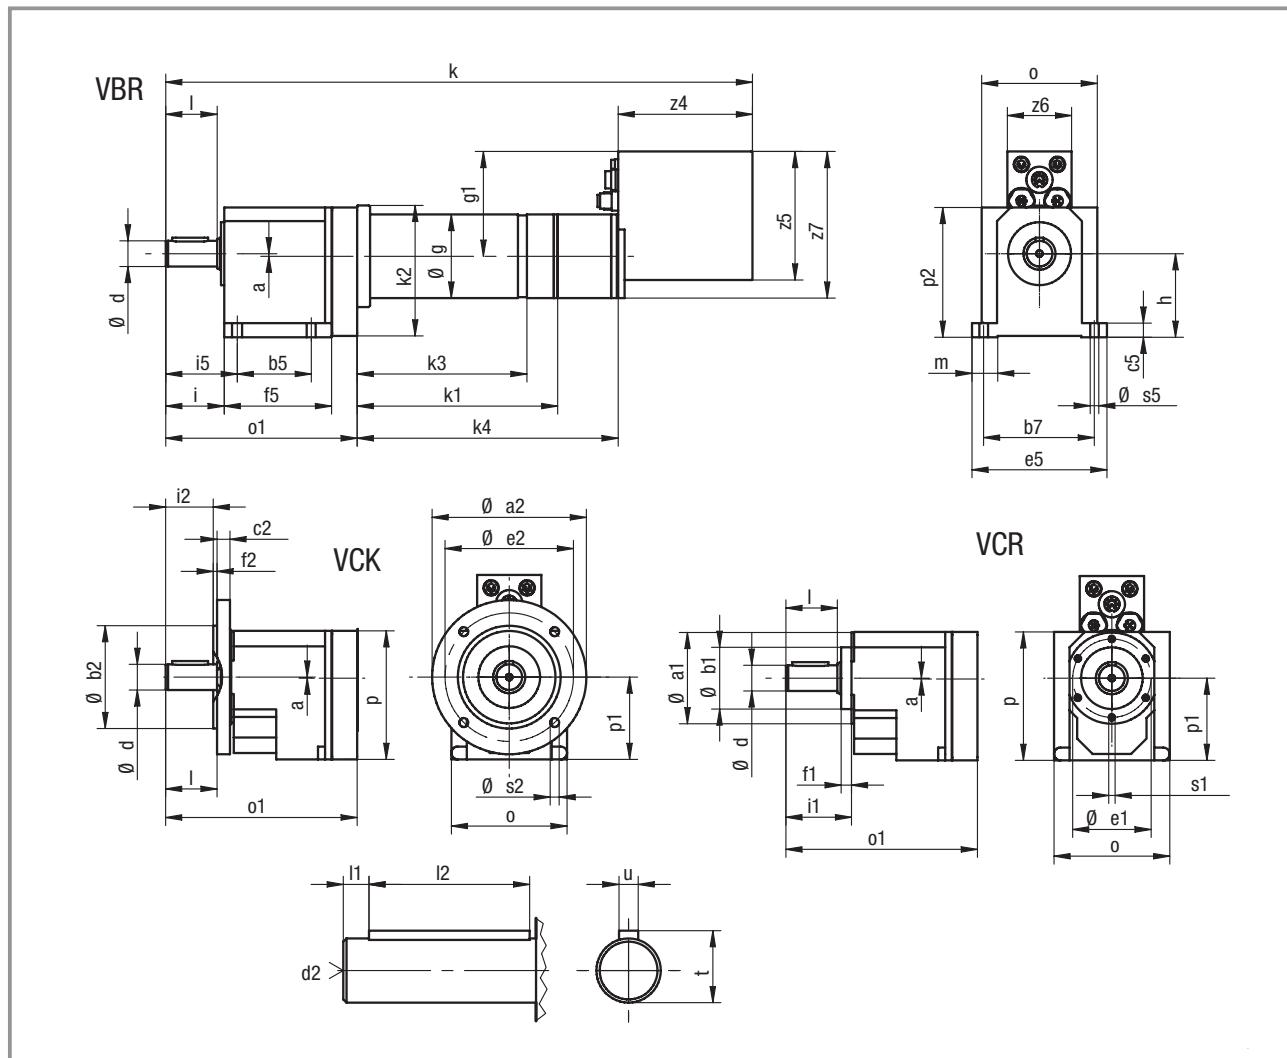

Geared motor	a	a1	a2	b1	b2	b5	b7	c2	c5	d	d2	e1	e2	e5	f1	f2	f5	g	g1	h	i	i1	i2	i5
GST03-2GV□□-035C22				120		80						100				3								
	2	71	140	48	95	60	91	10	11	20	M6	61	115	105	8	3	84	65	81.5	65	46	51	40	52
				160		110						130			3.5									

k SB	k1 SR	k2 XX	k3 SB	k4 SB	l	l1	l2	m	o	o1	p	p1	p2	s1	s2	s5	t	u	z4	z5	z6	z7	Weight [kg]
457	178	100	136	202	40	5	28	20	90	149.5	100	64	101	M5	9	6.6	22.5	6	105.5	100	50	114	5.5-7.0

Dimensions in mm



## Drive selection

### Servo helical geared motors GST

#### Selection table, type GST03-2GV□□-047C22

W P <sub>r</sub> rpm	Supply voltage Servo Drive 24 V or 42 V DC			i	Motor type	Selection Please tick
	n <sub>2</sub> Nm	M <sub>2</sub>	c			
170	770.1	2.00	7.52	2.597	SDSGS□□047-22	
	586.0	3.00	6.10	3.413		
	457.9	3.00	5.07	4.368		
	376.5	4.00	5.39	5.312		
	335.3	5.00	5.02	5.965		
	286.5	5.00	4.48	6.982		
	255.1	6.00	4.32	7.840		
	223.8	7.00	3.79	8.935		
	199.3	8.00	3.63	10.033		
	175.0	9.00	3.30	11.429		
	155.8	10.00	3.15	12.833		
	134.8	12.00	2.81	14.836		
	120.0	13.00	2.97	16.660		
	109.2	15.00	2.67	19.013		
	93.7	17.00	2.50	21.350		
	81.3	19.00	2.22	24.595		
	72.4	22.00	1.98	27.618		
	62.5	25.00	1.71	32.000		
	55.7	28.00	1.52	35.933		
	48.2	33.00	1.32	41.455		
	43.0	36.00	1.26	46.550		
	37.8	41.00	1.11	52.909		
	33.7	45.00	0.99	59.413		

#### Additional order information


Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VBR	
	VCR	
	VCK	
Output flange diameter	D = 120 mm	
	D = 140 mm	
	D=160 mm	
Mounting position	A B C D E F	
Position of electrical connection	2 3 4 5	

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03KBO (Voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MK503UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	
Power supply unit	48 V/10 A, 400 V/50 Hz	
	48 V/20 A, 400 V/50 Hz	



Dimensions, type GST03-2GV□□-047C22

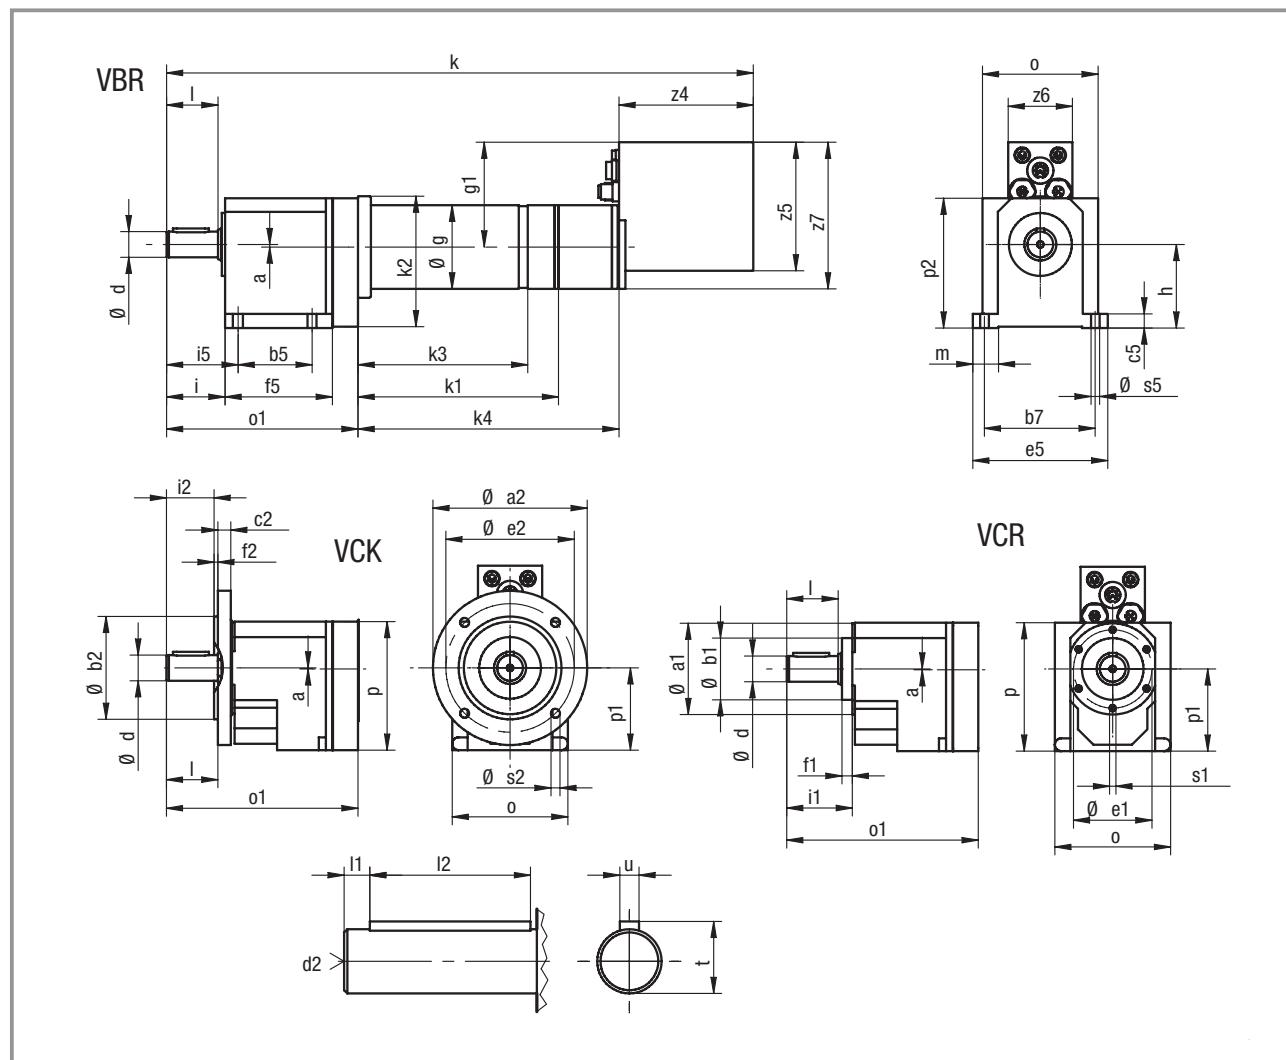

Geared motor	a	a1	a2	b1	b2	b5	b7	c2	c5	d	d2	e1	e2	e5	f1	f2	f5	g	g1	h	i	i1	i2	i5
GST03-2GV□□-047C22				120		80						100				3								
	2	71	140	48	95	60	91	10	11	20	M6	61	115	105	8	3	84	75	86.5	65	46	51	40	52
				160		110						130			3.5									

k SB	k1 SR	k2	k3	k4 XX	l SB	l1	l2	m	o	o1	p	p1	p2	s1	s2	s5	t	u	z4	z5	z6	z7	Weight [kg]
490	202.5	100	158.5	235	40	5	28	20	90	149.5	100	64	101	M5	9	6.6	22.5	6	105.5	100	50	124	6.5-8.0
																							9

Dimensions in mm



## Drive selection

### Servo bevel geared motors GKR

#### Selection table, type GKR03-2GHA□-035C22

P <sub>r</sub> W	Supply voltage Servo Drive 24 V or 42 V DC			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
140	554.40	2.00	13.83	5.411	SDSGS□□035-22	
	482.20	3.00	12.41	6.222		
	421.90	3.00	11.51	7.111		
	366.80	3.00	10.30	8.178		
	329.60	4.00	9.51	9.101		
	286.60	4.00	8.27	10.466		
	257.70	5.00	7.44	11.64		
	224.10	6.00	6.47	13.386		
	198.50	6.00	5.73	15.111		
	172.60	7.00	4.98	17.378		
	154.90	8.00	4.47	19.365		
	134.70	10.00	3.89	22.27		
	119.80	11.00	3.92	25.051		
	104.10	12.00	3.41	28.808		
	92.00	14.00	3.01	32.593		
	80.00	16.00	2.62	37.481		
	71.10	18.00	2.49	42.222		
	61.80	21.00	2.17	48.556		
	55.70	23.00	1.95	53.889		
	48.40	26.00	1.70	61.972		


#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VAR	
	VAK	
	HAR	
	HAK	
Output flange diameter	110 mm	
	120 mm	
Hollow shaft bore	18 mm	
	20 mm	
Shaft position on type VAR		3 5 8
Flange/shaft position on type VAK		3 5
Flange position on type HAK		3 5
Mounting position		A B C D E F
Position of electrical connection		2 3 4 5

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03KBO (Voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	
Power supply unit	24 V/10 A, 230 V/50 Hz	
	24 V/20 A, 230 V/50 Hz	
	48 V/10 A, 400 V/50 Hz	
	48 V/20 A, 400 V/50 Hz	

Dimensions, type GKR03-2GHA□-035C22

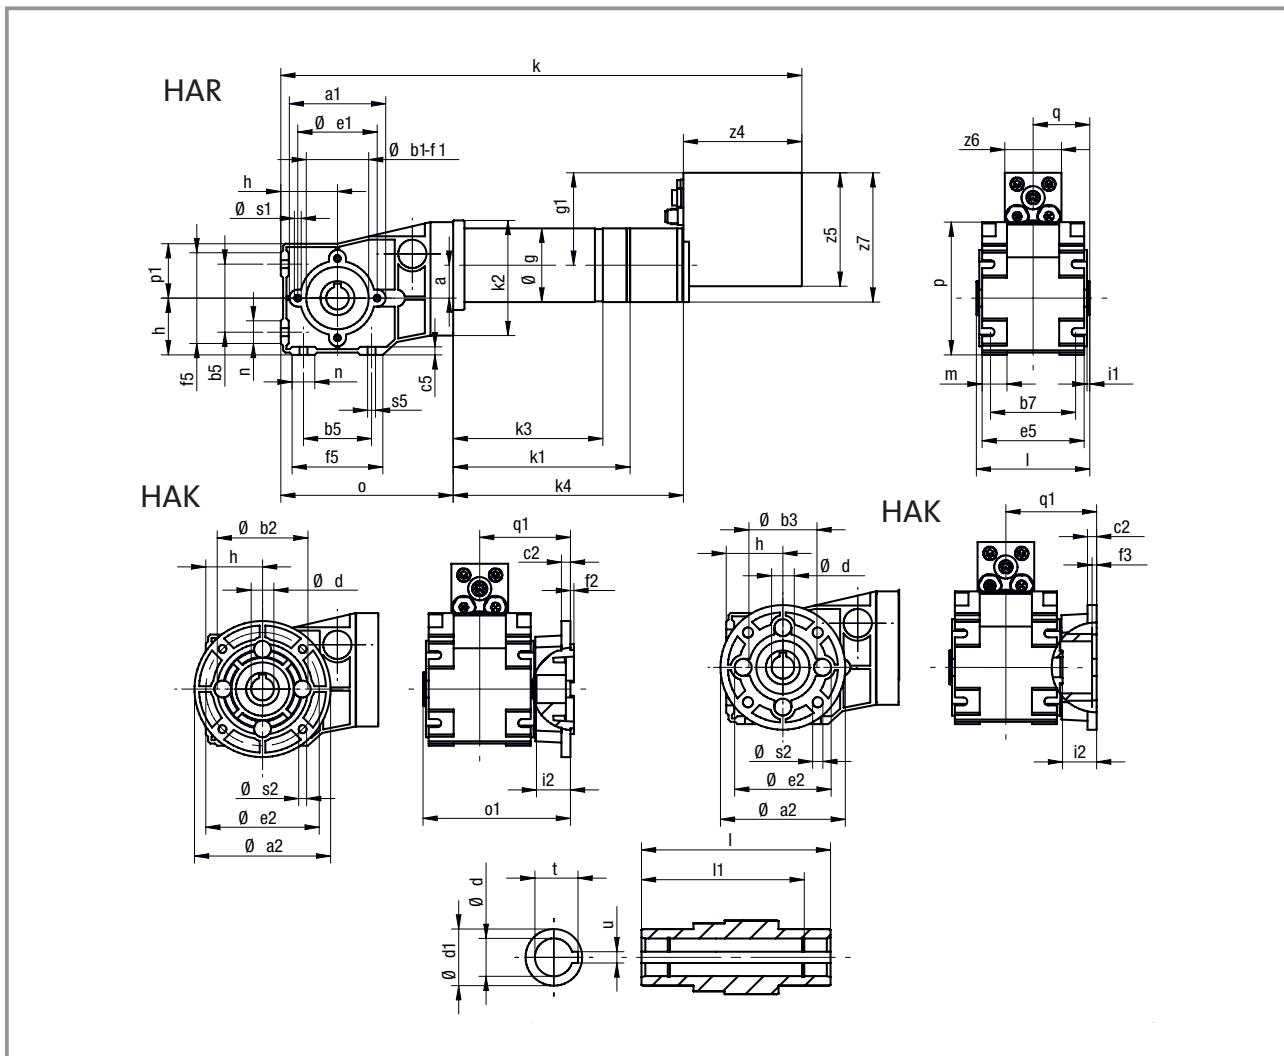

Geared motor	a	a1	a2	b1	b2	b3	b5	b7	c2	c5	d	d1	e1	e2	e5	f1	f2	f3	f5	g	g1	h	i1	i2
GKR03-2GHA□-035C22	29	84	120	55	80	-	60	75	8	7	18	30	70	100	90	3	3	-	80	65	81.5	50	2.5	30
		110		-	60					20	30		87				4							

k SB	k1 SR	k2	k3 XX	k4 SB	I	l1	m	n	o	o1	p	p1	q	q1	s1	s2	s5	t	u	z4	z5	z6	z7	Weight
460.5	178	100	136	202	100	86	22	20	152	130	117	48	50	80	M6	7	6.6	20.8	6	105.5	100	50	114	
																	9	22.8	6				5.5-7.0	

Dimensions in mm



## Drive selection

### Servo bevel geared motors GKR

#### Selection table, type GKR03-2GVA□-047C22

P <sub>r</sub> W	Supply voltage Servo Drive 24 V or 42 V DC			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
170	369.9	4.00	7.78	5.411	SDSGS□□047-22	
	321.4	5.00	6.98	6.222		
	281.3	5.00	6.48	7.111		
	244.6	6.00	5.79	8.178		
	219.8	7.00	5.35	9.101		
	191.1	8.00	4.65	10.466		
	171.8	9.00	4.18	11.64		
	149.4	10.00	3.64	13.386		
	132.4	11.00	3.22	15.111		
	115.1	13.00	2.80	17.378		
	103.3	15.00	2.51	19.365		
	89.8	17.00	2.19	22.27		
	79.8	19.00	2.21	25.051		
	69.4	22.00	1.92	28.808		
	61.4	25.00	1.70	32.593		
	53.4	28.00	1.47	37.481		
	47.4	32.00	1.40	42.222		
	41.2	37.00	1.22	48.556		
	37.1	41.00	1.10	53.889		
	32.3	45.00	0.96	61.972		

#### Additional order information


Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VAR	
	VAK	
	HAR	
	HAK	
Output flange diameter	110 mm	
	120 mm	
Hollow shaft bore	18 mm	
	20 mm	
Shaft position on type VAR		3 5 8
Flange/shaft position on type VAK		3 5
Flange position on type HAK		3 5
Mounting position		A B C D E F
Position of electrical connection		2 3 4 5

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03KBO (Voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	
Power supply unit	48 V/10 A, 400 V/50 Hz	
	48 V/20 A, 400 V/50 Hz	




Dimensions, type GKR03-2GVA□-047C22

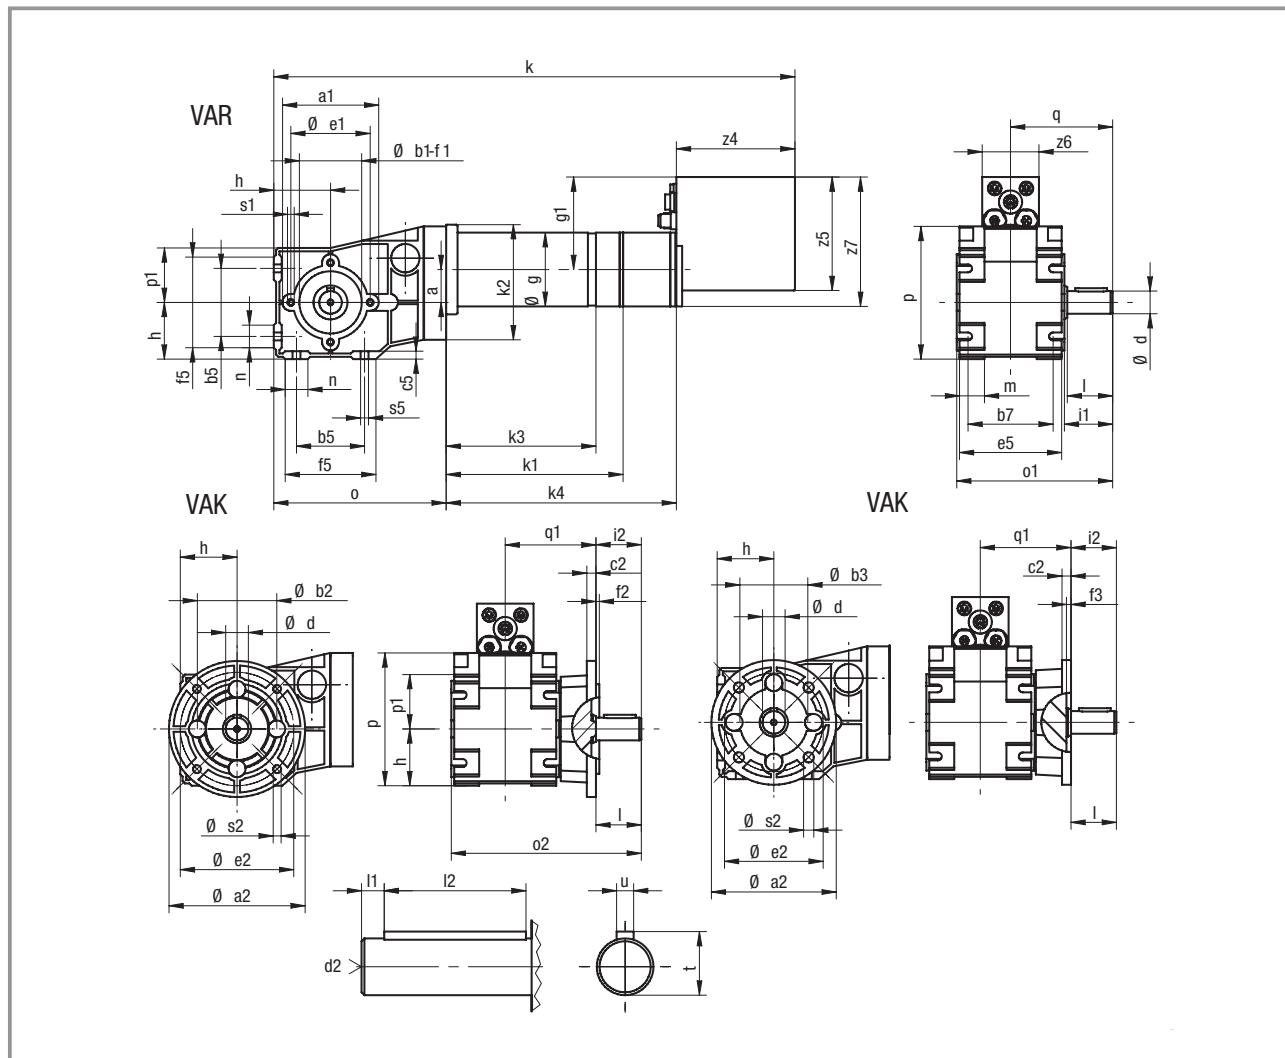

Geared motor	a	a1	a2	b1	b2	b3	b5	b7	c2	c5	d	d2	e1	e2	e5	f1	f2	f3	f5	g	g1	h	i1	i2	
GKR03-2GVA□-047C22	29	84	120	55	80	-	60	75	8	7	20	M6	70	100	90	2.5	3	-	80	65	86.5	50	42.5	40	
		110		-	60								87				4								

k	k1	k2	k3	k4	I	I1	I2	m	n	o	o1	o2	p	p1	q	q1	s1	s2	s5	t	u	z4	z5	z6	z7	Weight [kg]
SB	SR	XX	SB	SB																						
493.5	202.5	100	158	235	40	5	28	22	20	152	138	168	117	48	90	80	M6	7	6.6	22.5	6	105.5	100	50	114	6.5-8.0
																		9								

Dimensions in mm

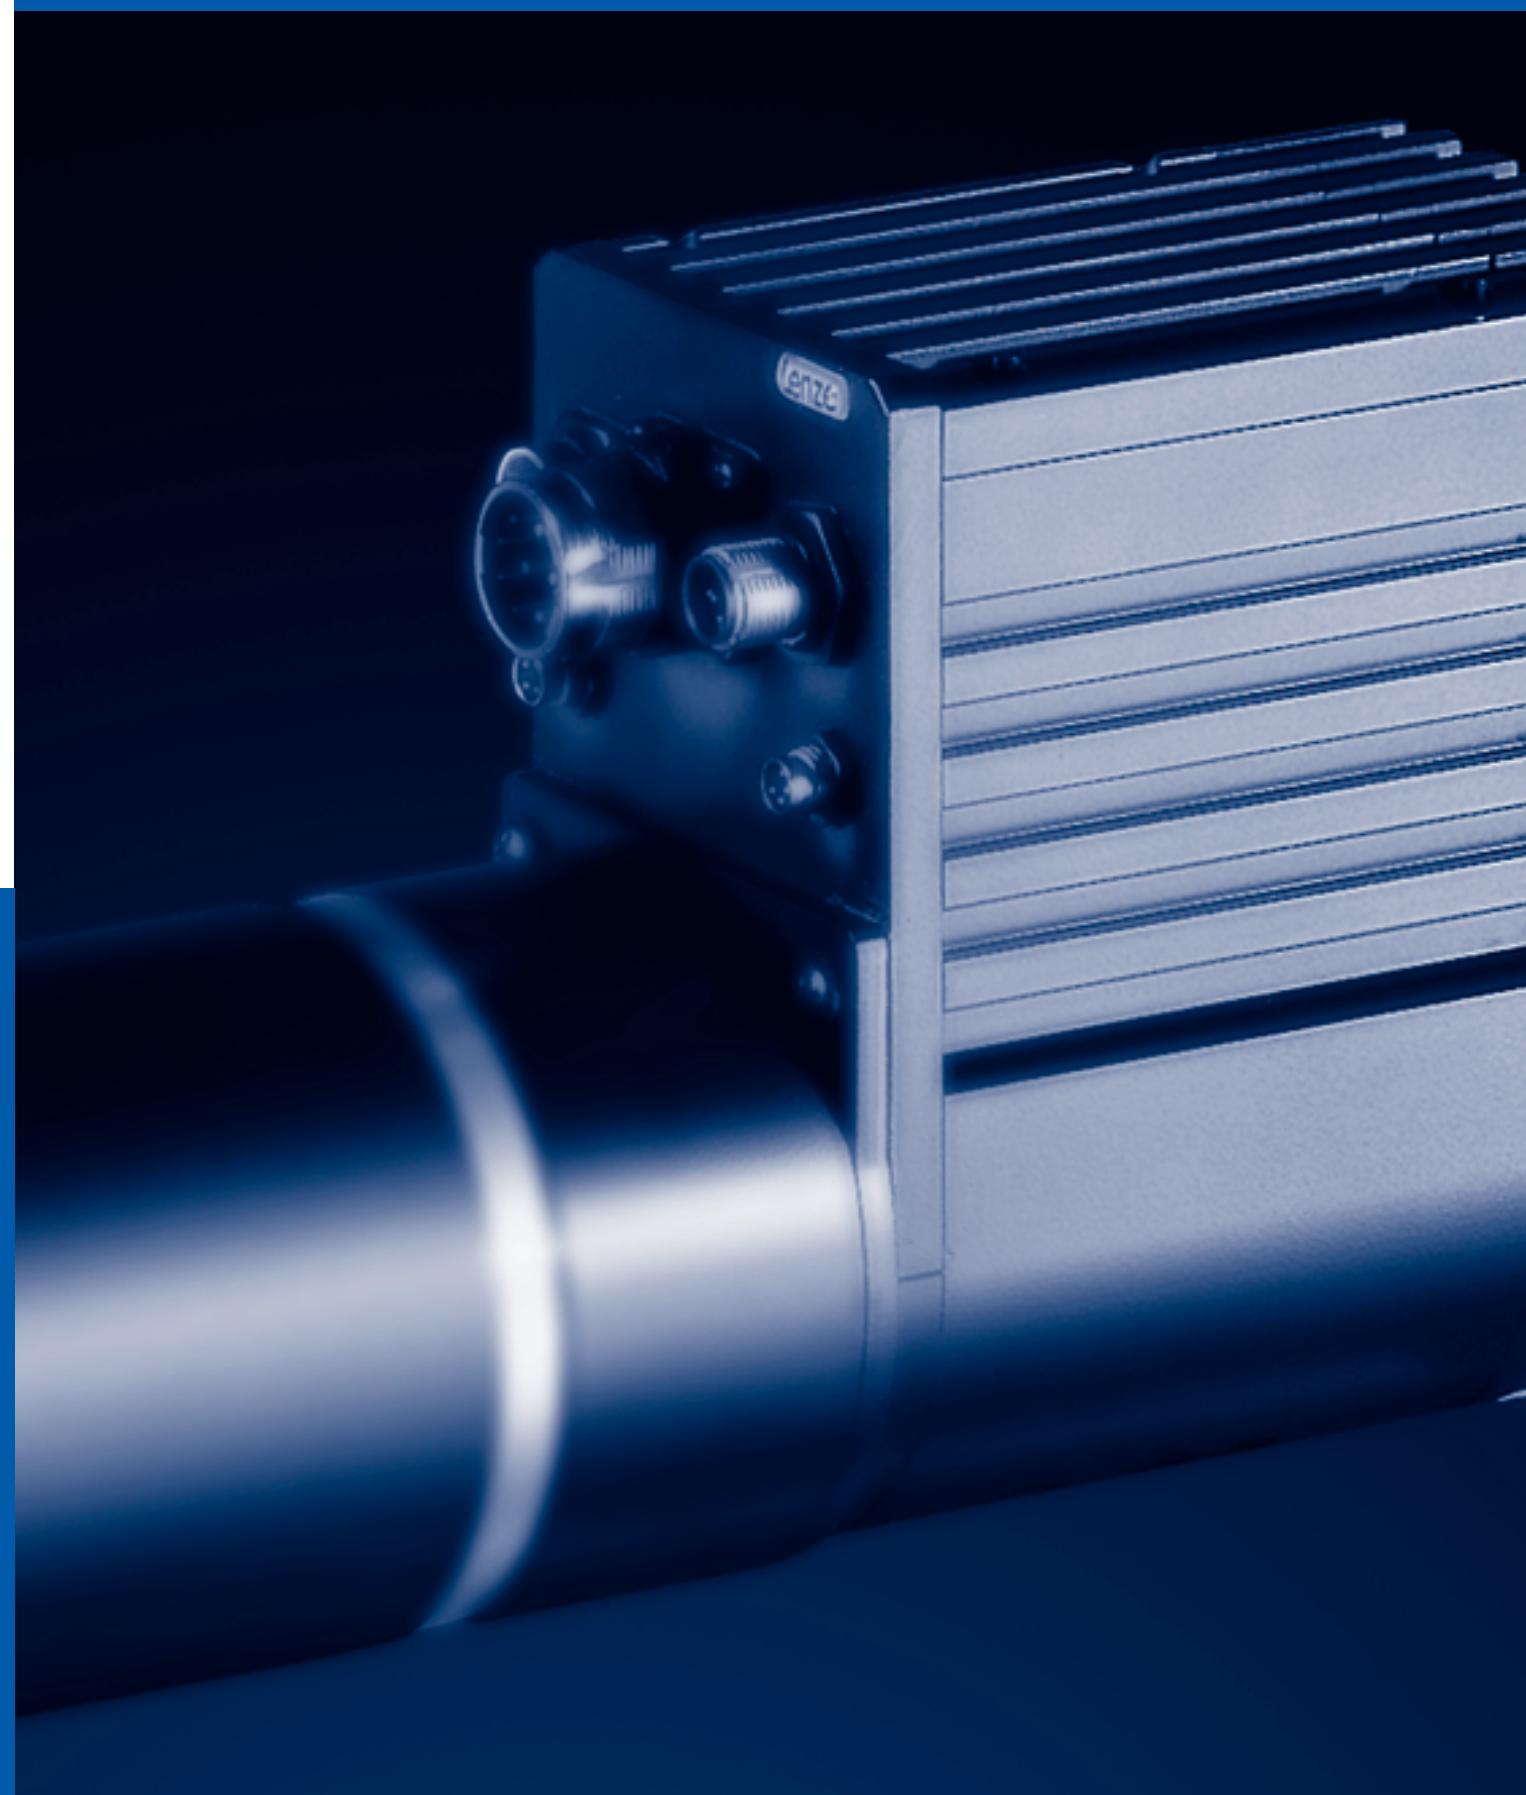

# Drive selection | 930 fluxxtorque Servo Drives

## Integrated mounting 930M servo inverter for a 230 V AC supply voltage

SDSGS servo motors	3-2
Servo worm geared motors SSN	3-4
Servo planetary geared motors SPL	3-8
Servo helical geared motors GST	3-14
Servo bevel geared motors GKR	3-20



## Drive selection

### SDSGS servo motors

#### Selection table, type SDSGS□□□□□-22

P <sub>r</sub> W	Supply voltage Servo Drive 230 V AC		Version A-side	Motor type	Selection Please tick
	n <sub>1</sub> rpm	M <sub>1</sub> Nm			
250	3000	0.80	IEC56 B14 C80	SDSGS□□047-22	
250	3000	0.80	IEC63 B14 C90	SDSGS□□047-22	
440	3000	1.40	IEC63 B14 C90	SDSGS□□056-22	

#### Additional order information


Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Position of electrical connection		1

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03NBO (voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	



Dimensions, type SDSGS□□□□□-22

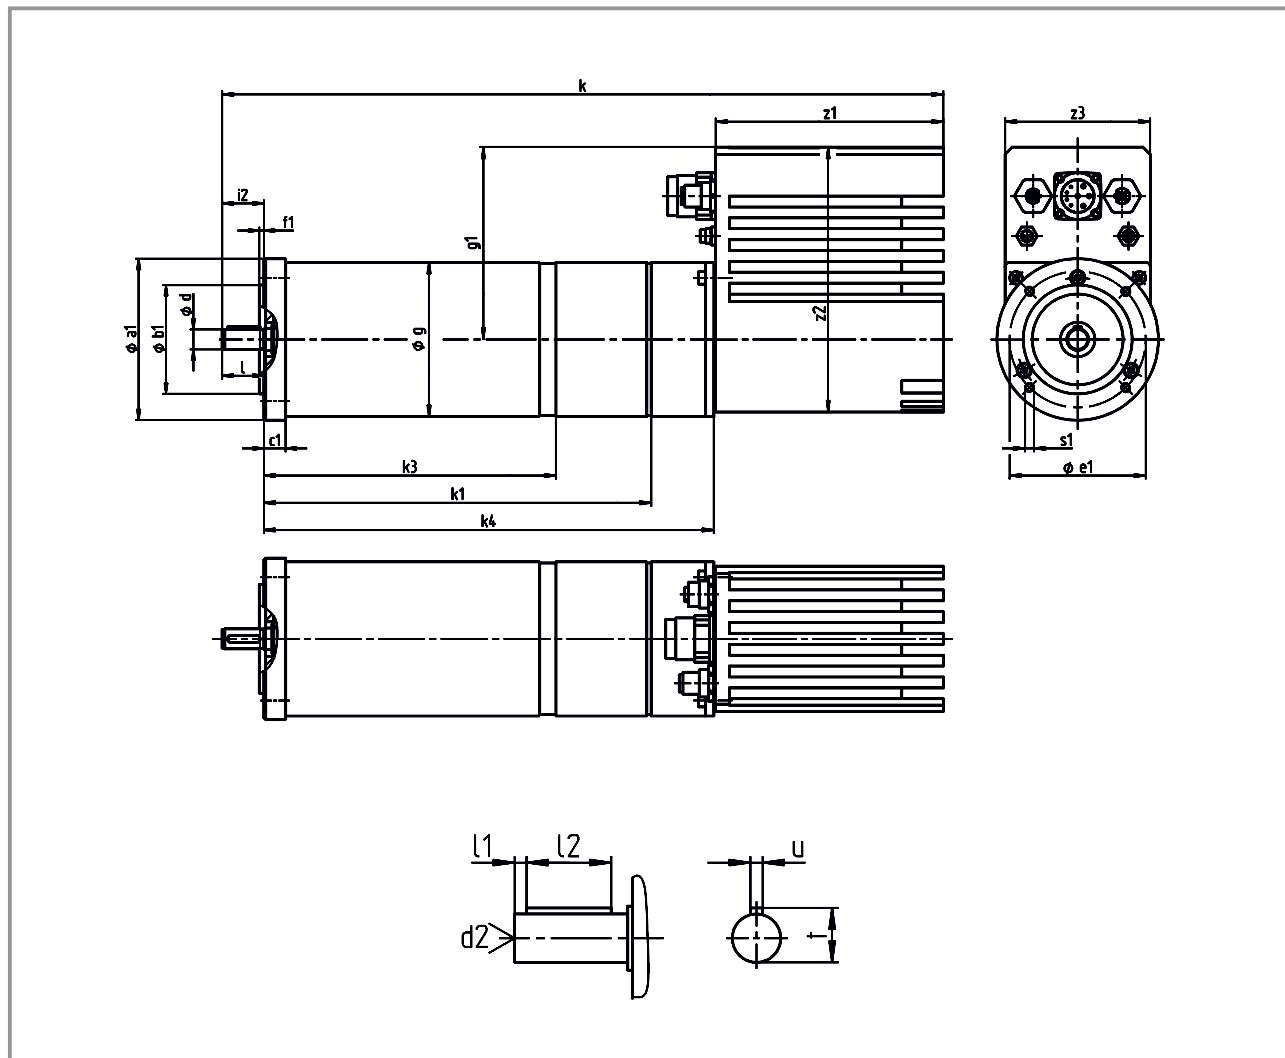

Motor type	Frame size	a1	b1	c1	d	d2	e1	f1	g	g1	i2	k	k1	k3	k4	I
			j7		k6							SB	SR	XX	SB	
SDSGSS□047-22	IEC56C80	79	50	12	9	M3	65	2.5	75	106	20	379	188.5	156	232.5	20
SDSGSS□047-22	IEC63C90	89	60	12	11	M4	75	2.5	75	106	23	382	188.5	156	232.5	23
SDSGSS□056-22	IEC63C90	89	60	12	11	M4	75	2.5	85	106	23	397.5	195.5	163	248	23

Motor type	Frame size	l1	l2	s1	t	u	z1	z2	z3	Weight [kg]				
SDSGSS□047-22	IEC56C80	3	14	M5	10.2	3	125.5	146	80	5.0-6.0				
SDSGSS□047-22	IEC63C90	3	18	M5	12.5	4	125.5	146	80	5.0-6.0				
SDSGSS□056-22	IEC63C90	3	18	M5	12.5	4	125.5	146	80	6.0-7.0				

Dimensions in mm



## Drive selection

### Servo worm geared motors SSN

#### Selection table, type SSN40-1G□□□-047C22

P <sub>r</sub> W	Supply voltage Servo Drive 230 V AC			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
250	441.0	4.57	7.66	6.75		
	300.0	6.48	5.40	10	SDSGS□□047-22	
	200.0	8.88	3.72	15		
	150.0	11.36	2.99	20		
	120.0	12.80	2.27	25		
	100.0	14.88	2.42	30		
	75.0	17.92	1.90	40		
	60.0	21.60	1.48	50		
	50.0	18.24	1.75	60		
	38.0	24.00	0.96	80		

#### Additional order information


Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VAR	
	DAR	
	VAL	
	HAR	
	VCR	
	DCR	
	VCL	
	HCR	
Shaft position on version VAR/VCR		3 5 8
Flange/shaft position on version VAL/VCL		3 5 8
Mounting position		A B C D E F
Position of electrical connection		2 3 4 5

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03NBO (voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	



**Dimensions, type SSN40-1G□□□-047C22**

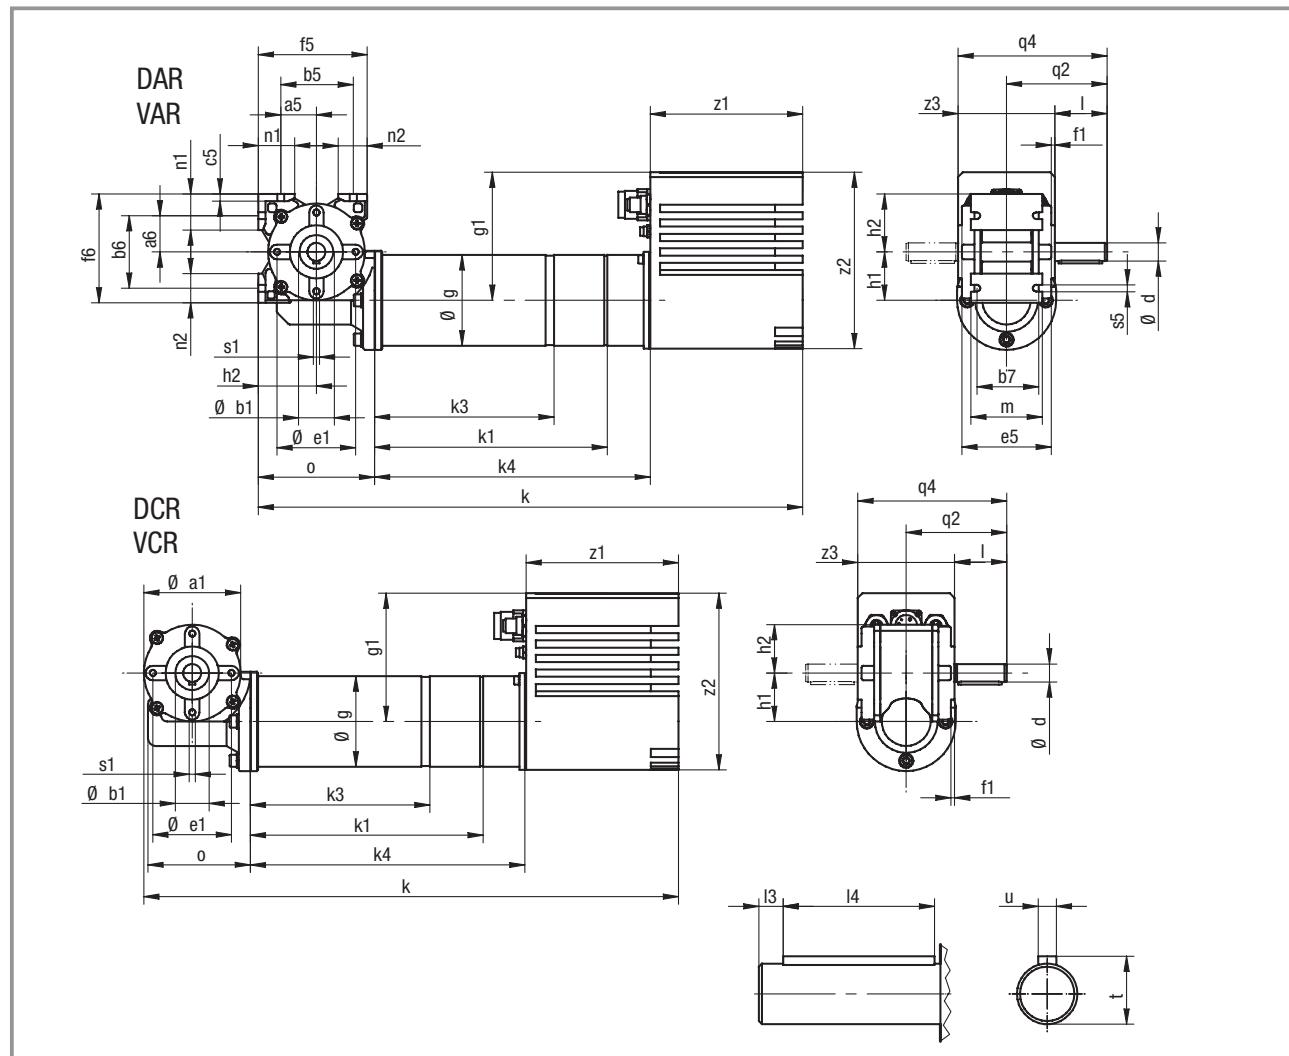

Geared motor	a1	a5	a6	b1 h10	b5	b6	b7	c5	d h6	e1	e5	f1	f5	f6	g	g1	h1	h2	k SB	k1 SR
SSN40-1GVAR-047C22	77	30	30	44	60	60	50	6	15	65	80	2	90	90	75	106	40	48	323	183
SSN40-1GVCR-047C22	77	-	-	44	-	-	-	-	15	65	80	2	-	-	75	106	40	40	315	183


k3 XX	k4 SB	l	l3	l4	m	n1	n2	o	q2	q4	s1	s5	t	u	z1	z2	z3	Weight [kg]
150.5	227	43	4	36	59	30	24	96	83	123	M6	5.5	17	5	126.5	146	80	6.5-7.8
150.5	227	43	4	36	-	-	-	88	83	123	M6	-	17	5	126.5	146	80	6.5-7.8

Dimensions in mm



**Drive selection**  
Servo worm geared motors SSN

Dimensions, type SSN40-1G□□□-047C22

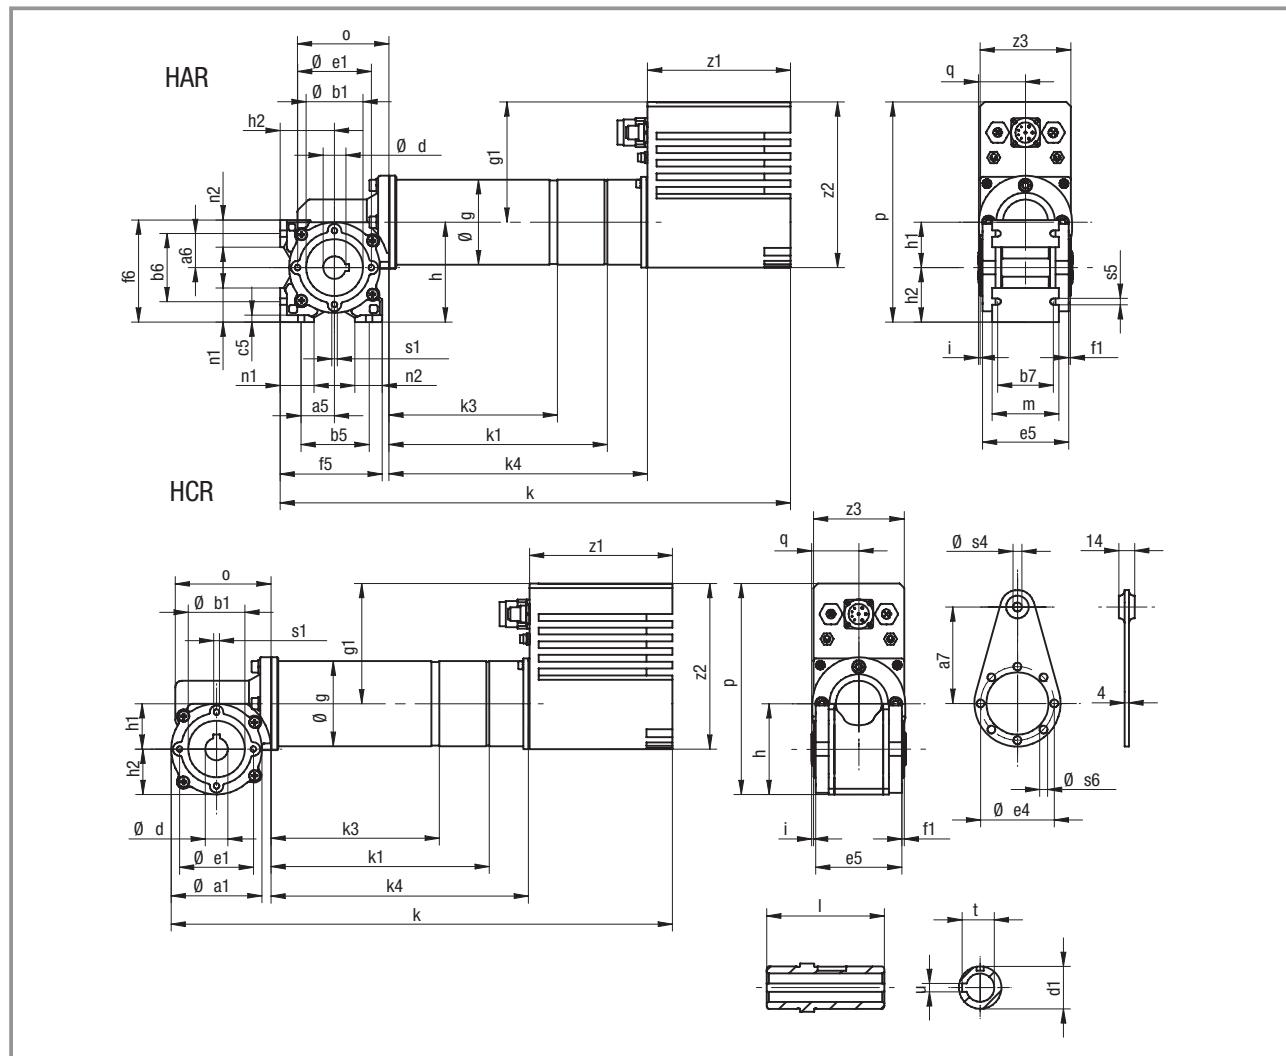


Geared motor	a1	a5	a6	a7	b1 h8	b5	b6	b7	c5	d	d1	e1	e4	e5	f1	f5	f6	g	g1	h	h1	h2	i
SSN40-1GHR-047C22	77	30	30	85	50	60	60	50	6	20	30	65	65	80	2	90	90	75	106	88	40	48	1.5
SSN40-1GHCR-047C22	77	-	-	85	50	-	-	-	-	20	30	65	65	80	2	-	-	75	106	80	40	40	1.5

k SB	k1 SR	k3 XX	k4 SB	I	m	n1	n2	o	p	q	s1	s4	s5	s6	t	u	z1	z2	z3	Weight [kg]		
449.5	183	150.5	227	83	59	30	24	96	194	41.5	M6	8	5.5	7	22.8	6	126.5	146	80	6.5-7.8		
441.5	183	150.5	227	83	-	-	-	88	186	41.5	M6	8	-	7	22.8	6	126.5	146	80	6.5-7.8		

Dimensions in mm

Dimensions, type SSN40-1G□□□-047C22

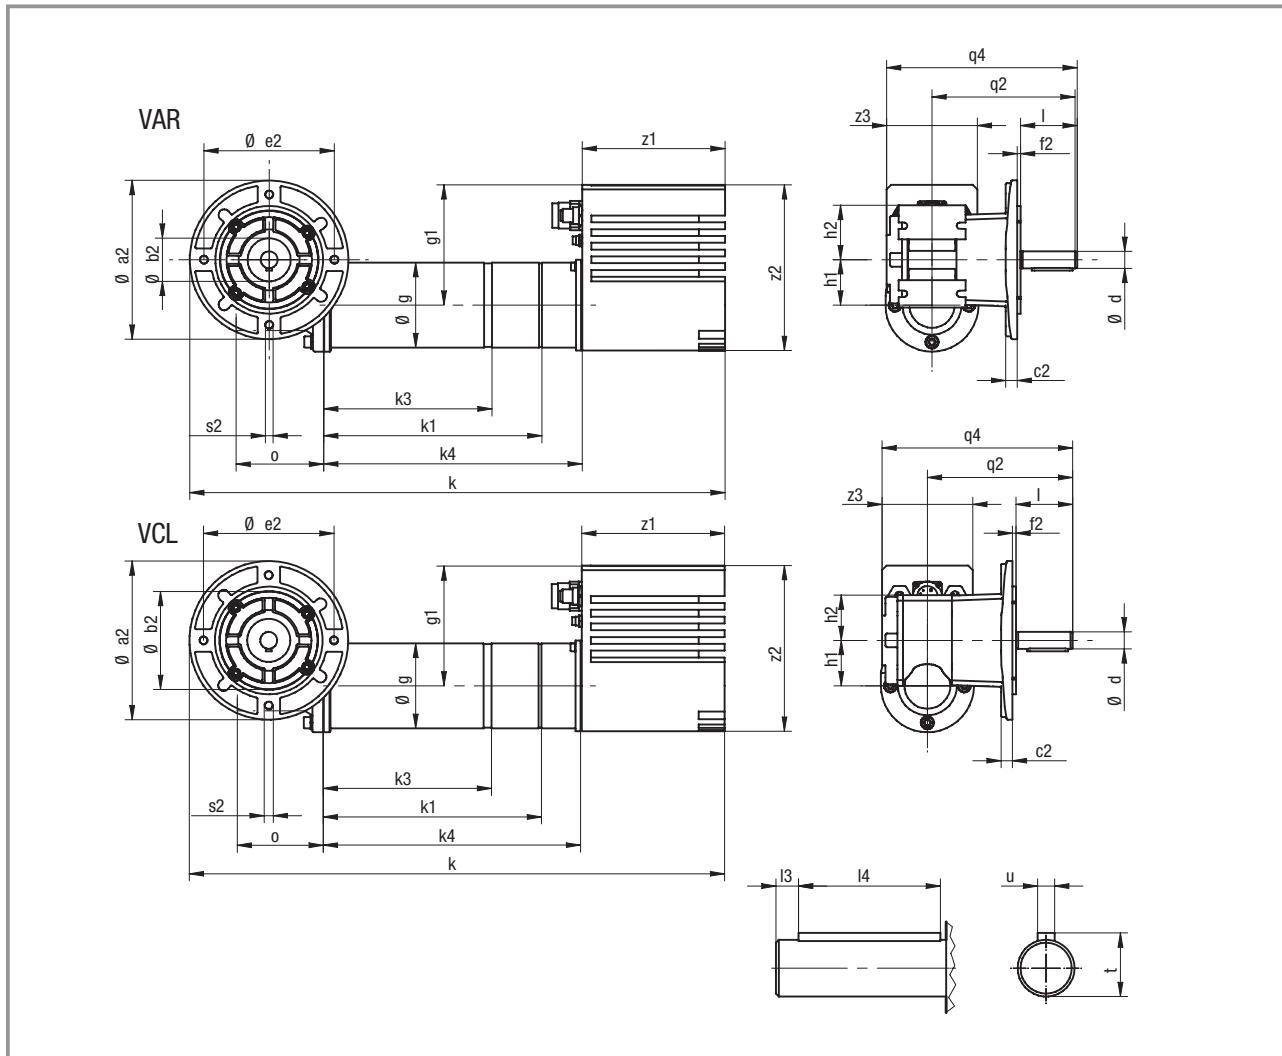

Geared motor	a2	b2 j7	c2	d h6	e2	f2	g	g1	h1	h2	k SB	k1 SR	k3 XX
SSN40-1GVAL-047C22	140	95	10	15	115	3	75	106	40	48	471.5	183	150.5
SSN40-1GVCL-047C22	140	95	10	15	115	3	75	106	40	40	471.5	183	150.5

Geared motor	k4 SB	I	I3	I4	o	q2	q4	s2	t	u	z1	z2	z3	Weight [kg]
SSN40-1GVAL-047C22	227	50	4	36	96	128	168	M8	17	5	126.5	146	80	6.5-7.8
SSN40-1GVCL-047C22	227	50	4	36	88	128	168	M8	17	5	126.5	146	80	6.5-7.8

Dimensions in mm



## Drive selection

### Servo planetary geared motors SPL

#### Selection table, type SPL62-□GVCR-047N22

P <sub>r</sub> W	Supply voltage Servo Drive 230 V AC			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
250	811.0	2.37	3.38	3.70	SDSGS□□047-22	
	444.0	4.32	1.85	6.75		
	218.0	8.24	3.03	13.73		
	120.0	15.01	1.67	25.01		
	86.0	20.98	1.19	34.97		
	66.0	27.34	0.91	45.56		
	59.0	28.50	1.75	50.89		
	42.0	39.85	1.25	71.16		


#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Position of electrical connection		1

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03NBO (voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	

Dimensions, type SPL62-□GVCR-047N22

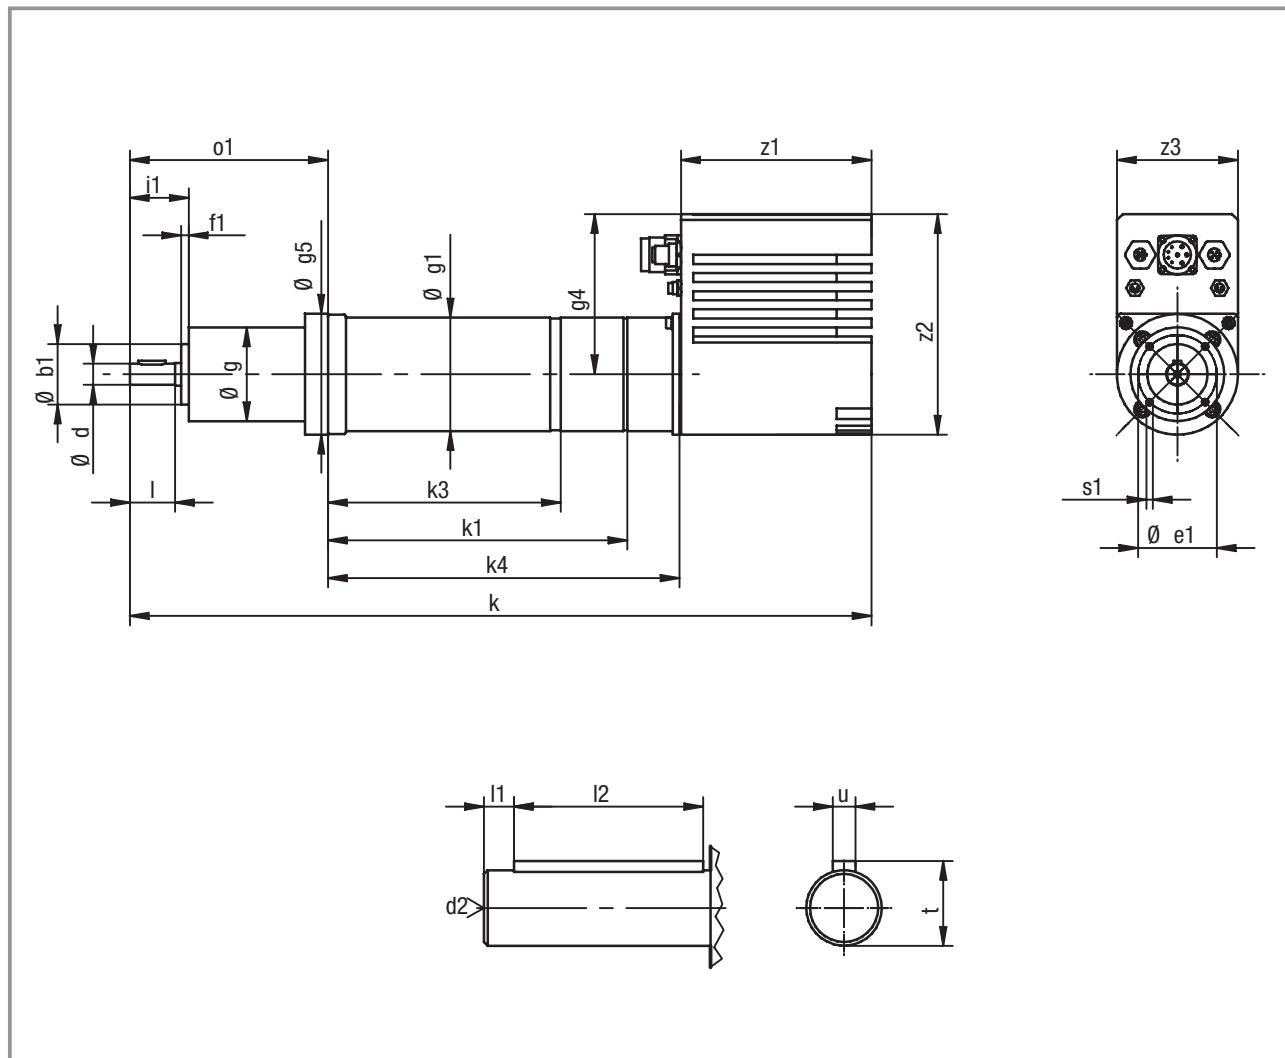

Geared motor	Ratio i	b1 j7	d h7	d2	e1	f1	g	g1	g4	g5	i1	k SB	k1 SR
SPL62-□GVCR-047N22	3.7;6.7											474.5	
	14...46	40	14	M5	52	5	62	75	106	80	39	490.5	189
	51...71											506.5	

k3 XX	k4 SB	I	I1	I2	o1	s1	t	u	z1	z2	z3	Weight [kg]	
					115							5.8-6.8	
156	233	30	5.5	18	131	M5x10	16	5	126.5	146	80	6.2-7.2	
					147							6.6-7.6	

Dimensions in mm



## Drive selection

### Servo planetary geared motors SPL

#### Selection table, type SPL81-□GVCR-047N22

P <sub>r</sub> W	Supply voltage Servo Drive 230 V AC			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
250	811.0	2.37	8.45	3.70	SDSGS□□047-22	
	444.0	4.32	4.63	6.75		
	218.0	8.24	7.28	13.73		
	120.0	15.01	4.00	25.01		
	86.0	20.98	2.86	34.97		
	66.0	27.34	2.19	45.56		
	59.0	28.50	4.21	50.89		
	42.0	39.85	3.01	71.16		
	30.0	55.72	2.15	99.50		
	24.0	69.42	1.73	123.97		


#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Position of electrical connection		1

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03NBO (voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	

Dimensions, type SPL81-□GVCR-047N22

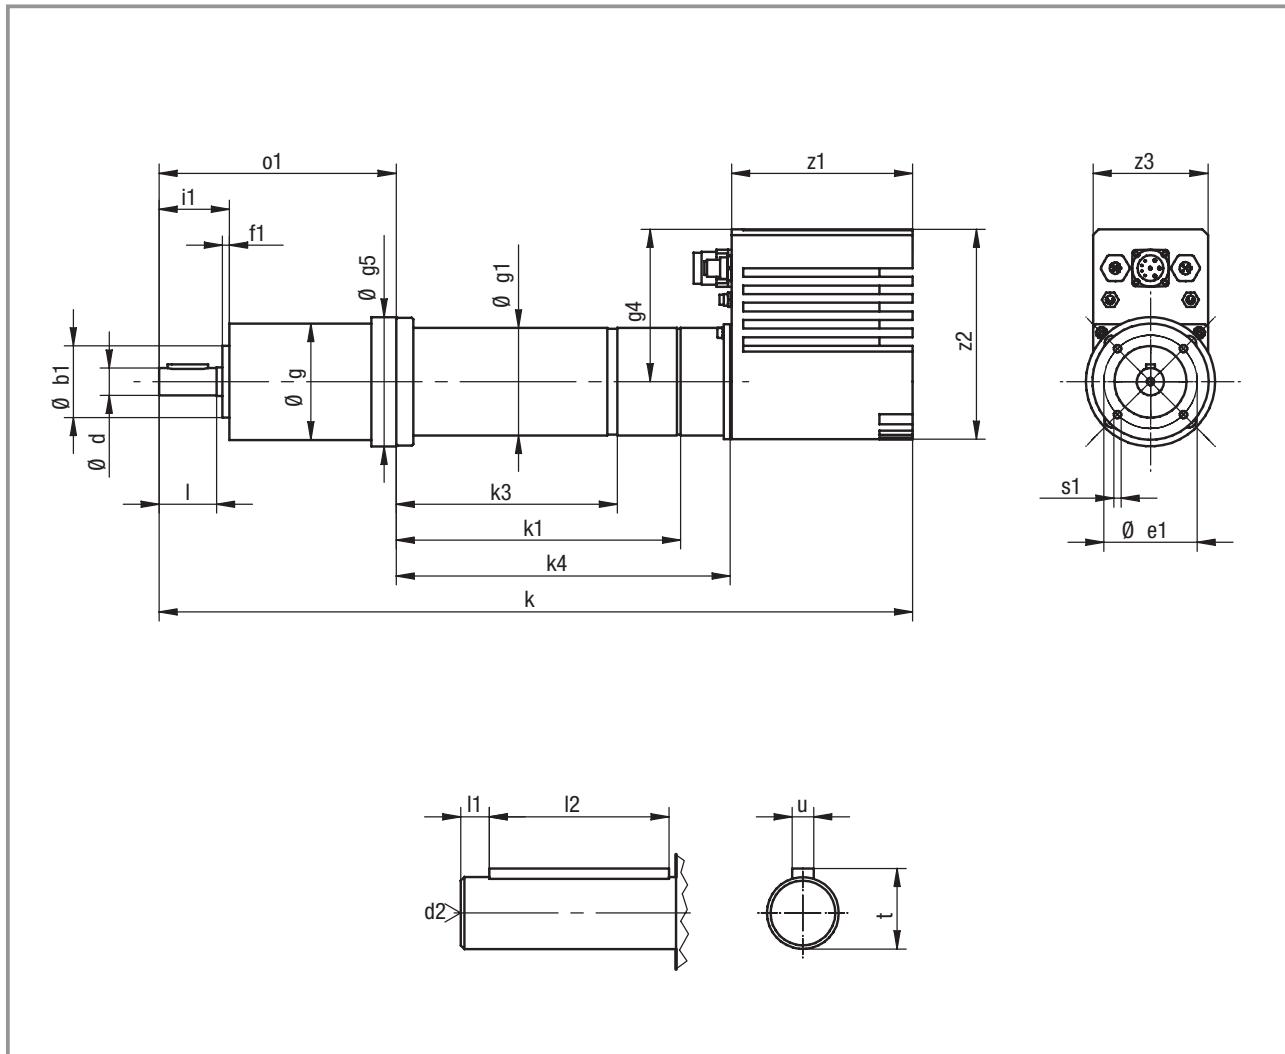

Geared motor	Ratio i	b1 j7	d h7	d2	e1	f1	g	g1	g4	g5	i1	k SB	k1 SR
SPL81-□GVCR-047N22	3.7;6.7											503.5	
	14...46	50	19	M6	65	5	81	75	106	90	49	524.5	189
	51...124											546.5	

k3 XX	k4 SB	I	l1	l2	o1	s1	t	u	z1	z2	z3	Weight [kg]
					144							7.1-8.1
156	233	40	6	28	165	M6x12	21.5	6	126.5	146	80	7.8-8.8
					187							8.5-9.5

Dimensions in mm



## Drive selection

### Servo planetary geared motors SPL

#### Selection table, type SPL81-□GVCR-056N22

P <sub>r</sub> W	Supply voltage Servo Drive 230 V AC			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
440	811	4.14	4.83	3.700		
	444	7.56	2.65	6.750	SDSGS□□056-22	
	218	14.42	4.16	13.730		
	120	26.26	2.28	25.010		
	86	36.72	1.63	34.970		
	66	47.84	1.25	45.560		
	59	49.87	2.41	50.890		
	42	69.74	1.72	71.160		
	30	97.51	1.23	99.500		
	24	120	0.99	123.970		


#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Position of electrical connection		1

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03NBO (voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	

Dimensions, type SPL81-□GVCR-056N22

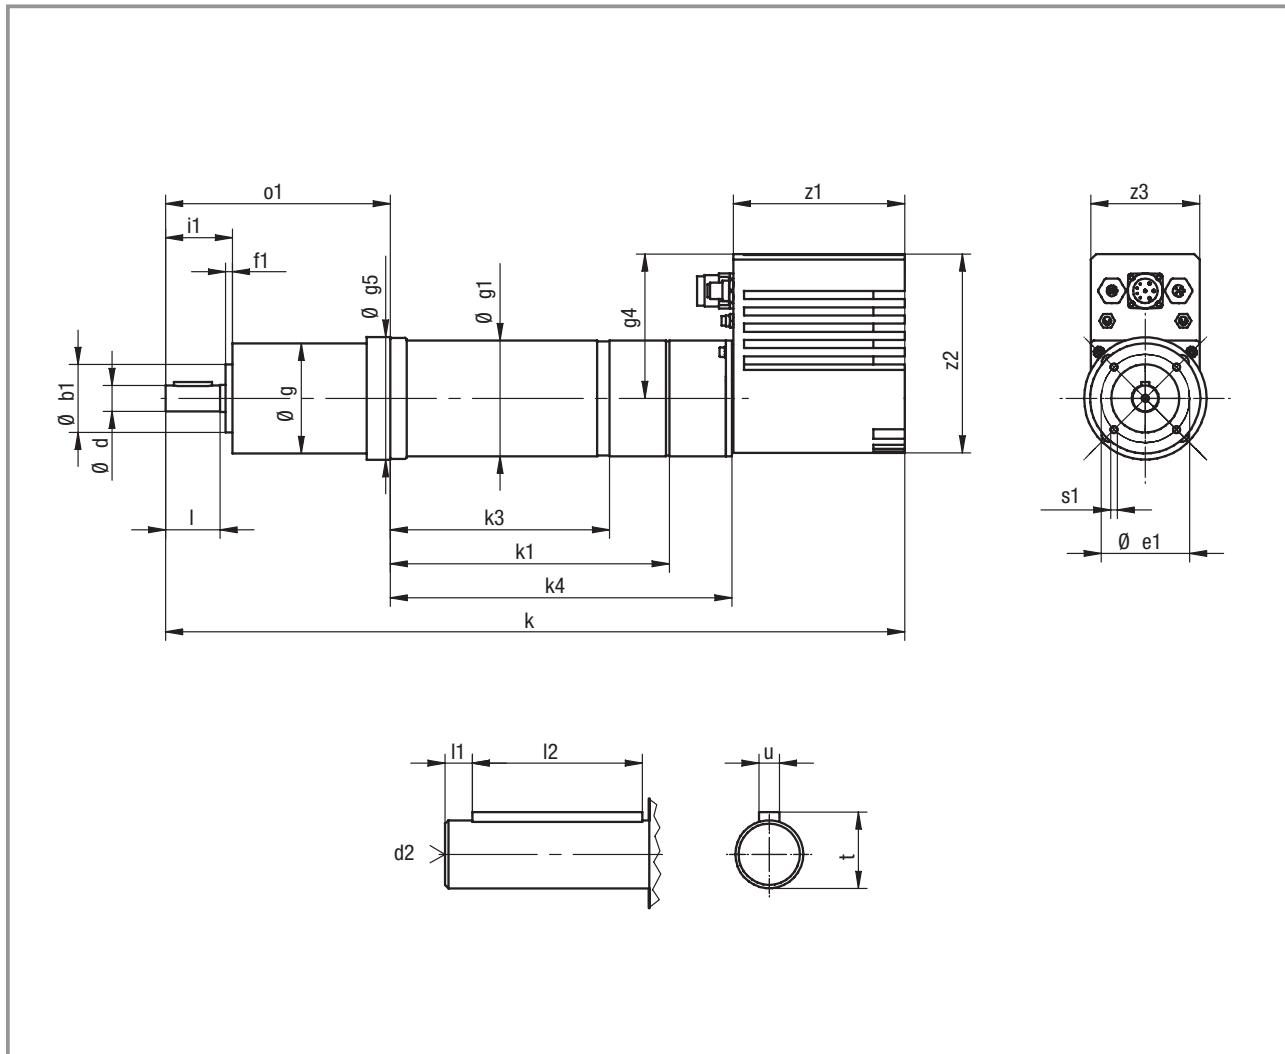

Geared motor	Ratio i	b1 j7	d h7	d2	e1	f1	g	g1	g4	g5	i1	k SB	k1 SR
SPL81-□GVCR-056N22	3.7;6.7											518.5	
	14...46	50	19	M6	65	5	81	85	106	90	49	539.5	196
	51...124											561.5	

k3 XX	k4 SB	I	l1	l2	o1	s1	t	u	z1	z2	z3	Weight [kg]	
					144							8.1-9.6	
163	248	40	6	28	165	M6x12	21.5	6	126.5	146	80	8.8-10.3	
					187							9.5-11.0	

Dimensions in mm



## Drive selection

### Servo helical geared motors GST

#### Selection table, type GST03-□GV□□-047C22

P <sub>r</sub> W	Supply voltage Servo Drive 230 V AC			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
250	1155.2	2.00	7.52	2.597	SDSGS□□047-22	
	879.0	3.00	6.10	3.413		
	686.8	3.00	5.07	4.368		
	564.8	4.00	5.39	5.312		
	502.9	5.00	5.02	5.965		
	429.7	5.00	4.48	6.982		
	382.7	6.00	4.32	7.840		
	335.8	7.00	3.79	8.935		
	299.0	8.00	3.63	10.033		
	262.5	9.00	3.30	11.429		
	233.8	10.00	3.15	12.833		
	202.2	11.00	2.81	14.836		
	180.1	13.00	2.97	16.660		
	157.8	15.00	2.67	19.013		
	140.5	16.00	2.50	21.350		
	122.0	19.00	2.22	24.595		
	108.6	21.00	1.98	27.618		
	93.8	25.00	1.71	32.000		
	83.5	28.00	1.52	35.933		
	72.4	32.00	1.32	41.455		
	64.4	36.00	1.26	46.550		
	56.7	41.00	1.11	52.909		
	50.5	45.00	0.99	59.413		


#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VBR	
	VCR	
	VCK	
Output flange diameter	120 mm	
	140 mm	
	160 mm	
Mounting position	A B C D E F	
Position of electrical connection	2 3 4 5	

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03NBO (voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	

Dimensions, type GST03-□GV□□-047C22

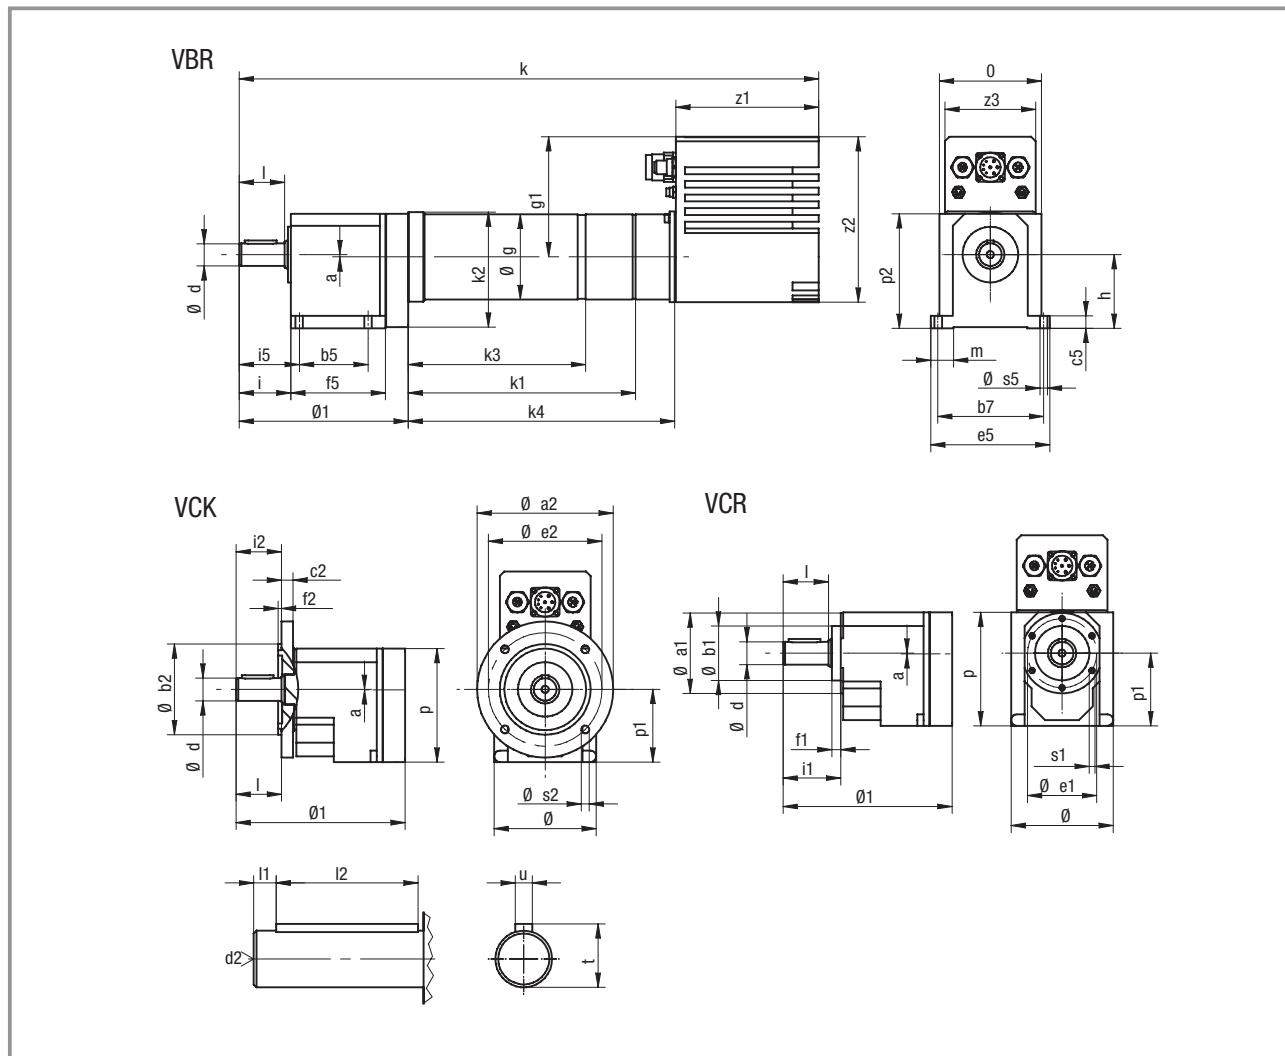

Geared motor	a	a1	a2	b1	b2	b5	b7	c2	c5	d	d2	e1	e2	e5	f1	f2	f5	g	g1	h	i	i1	i2	i5	
GST03-□GV□□-047C22			120		80							100			3										
	2	71	140	48	95	60	91	10	11	20	M6	61	115	105	8	3	84	75	106	65	46	51	40	52	
			160		110							130			3.5										

k SB	k1 SR	k2 XX	k3 SB	k4 SB	l	l1	l2	m	o	o1	p	p1	p2	s1	s2	s5	t	u	z1	z2	z3	Weight [kg]		
511	191	100	158.5	235	40	5	28	20	90	149.5	100	64	101	M5	9	6.6	22.5	6	126.5	146	80	8.0-9.5		

Dimensions in mm



## Drive selection

### Servo helical geared motors GST

#### Selection table, type GST04-1GV□□-056C22

P <sub>r</sub>	Supply voltage Servo Drive 230 V AC			i	Motor type	Selection Please tick
	n <sub>2</sub> W	M <sub>2</sub> rpm	c Nm			
440	1875.0	2	4.37	1.600	SDSGS□□056-22	
	1464.8	3	4.27	2.048		
	1339.3	3	4.43	2.240		
	1050.1	4	3.88	2.857		
	857.1	5	3.33	3.500		
	681.8	6	2.65	4.400		
	529.4	8	2.06	5.667		
	417.7	10	1.62	7.182		
	333.3	12	1.23	9.000		

#### Additional order information


Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VBR	
	VCR	
	VCK	
Output flange diameter	120 mm	
	140 mm	
	160 mm	
Mounting position	A B C D E F	
Position of electrical connection		2 3 4 5

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03NBO (voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	



Dimensions, type GST04-1GV□□-056C22

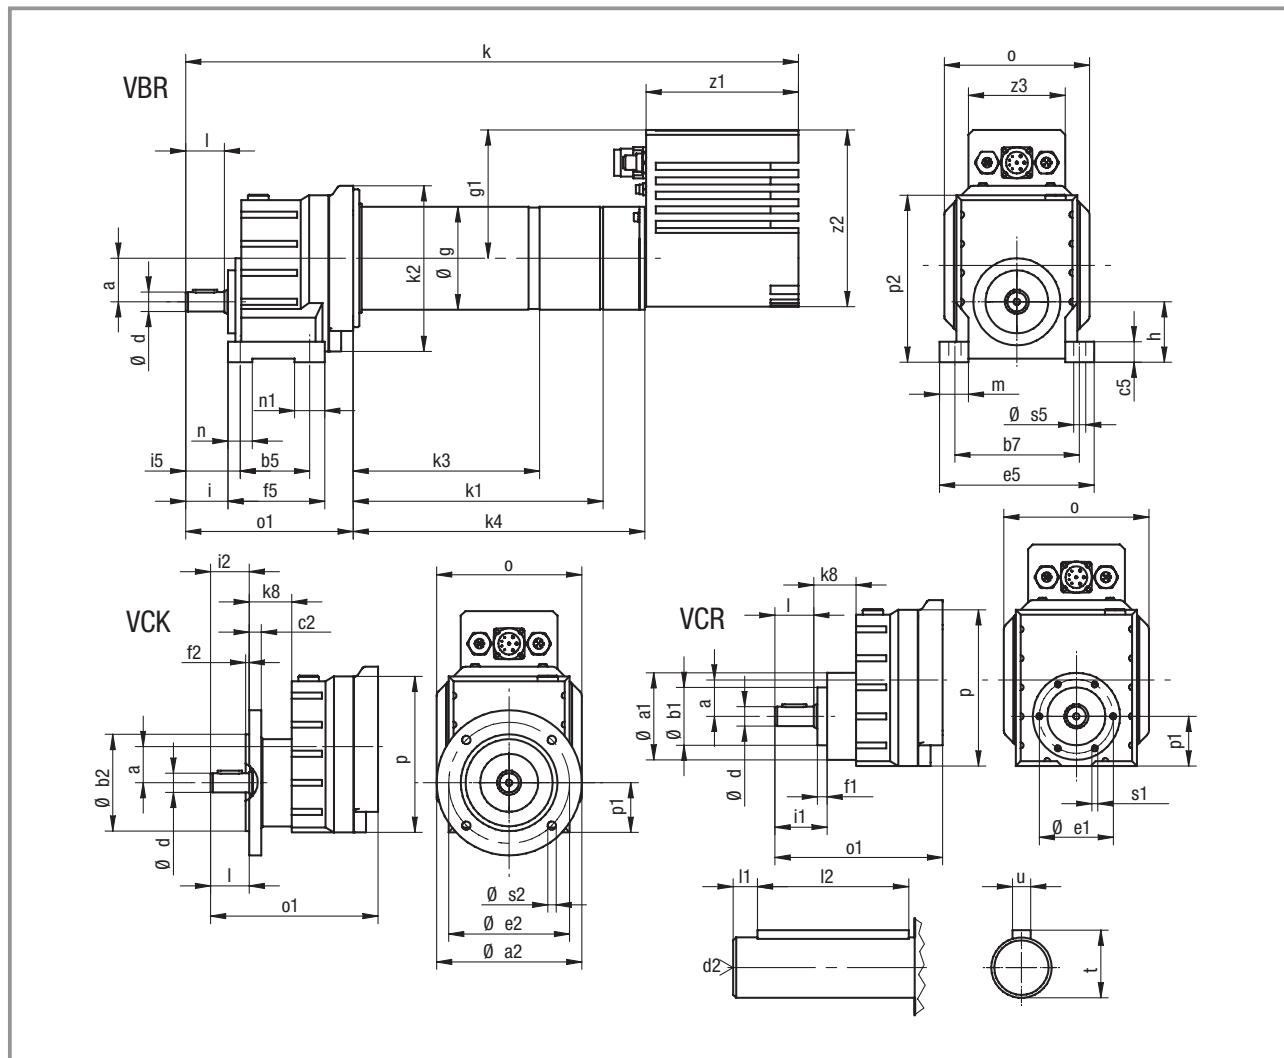

Geared motor	a	a1	a2	b1 h7	b2 j7	b5	b7	c2	c5	d k6	d2	e1	e2	e5	f1	f2	f5	g	g1	h	i	i1	i2	i5	
GST04-1GV□□-056C22		120		80						100					3										
	36	72	140	48	95	55	105	10	17	16	M5	61	115	130	8	3	80	85	106	50	35	43	32	45	
			160		110							130			3.5										

k SB	k1 SR	k2 XX	k3 SB	k4 SB	k8 I	I l1	I2 m	n	n1 o	o1 p	p p1	p2 s1	s2 s5	t u	z1 z2	z2 z3	Weight [kg]								
506	188.5	129	156	241	35	32	6	20	25	20	25	115	138.5	129	41	138	M5	9	9	18	5	126.5	146	80	9.5-11.0
																		9	9						

Dimensions in mm



## Drive selection

### Servo helical geared motors GST

#### Selection table, type GST04-2GV□□-056C22

P <sub>r</sub>	Supply voltage Servo Drive 230 V AC			i	Motor type	Selection Please tick
	n <sub>2</sub> W	M <sub>2</sub> rpm	c Nm			
440	1014.9	4	4.43	2.956	SDSGS□□056-22	
	900.1	4	4.46	3.333		
	740.2	5	4.41	4.053		
	656.3	6	4.43	4.571		
	578.4	7	4.36	5.187		
	512.8	8	4.38	5.850		
	468.8	9	4.19	6.400		
	426.1	9	3.89	7.040		
	375.0	11	3.57	8.000		
	333.0	12	3.37	9.010		
	304.4	13	3.20	9.856		
	267.9	15	2.60	11.200		
	238.6	17	2.65	12.571		
	210.0	19	2.04	14.286		
	194.8	21	2.47	15.400		
	171.4	24	1.94	17.500		
	155.0	26	2.00	19.360		
	136.4	30	1.54	22.000		
	120.3	34	1.58	24.933		
	105.9	38	1.24	28.333		
	94.9	42	1.26	31.600		
	83.5	47	0.98	35.909		
	75.8	53	1.01	39.600		
	66.7	52	0.86	45.000		

#### Additional order information


Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VBR	
	VCR	
	VCK	
Output flange diameter	120 mm	
	140 mm	
	160 mm	
Mounting position	A B C D E F	
Position of electrical connection	2 3 4 5	

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03NBO (voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	



Dimensions, type GST04-2GV□□-056C22

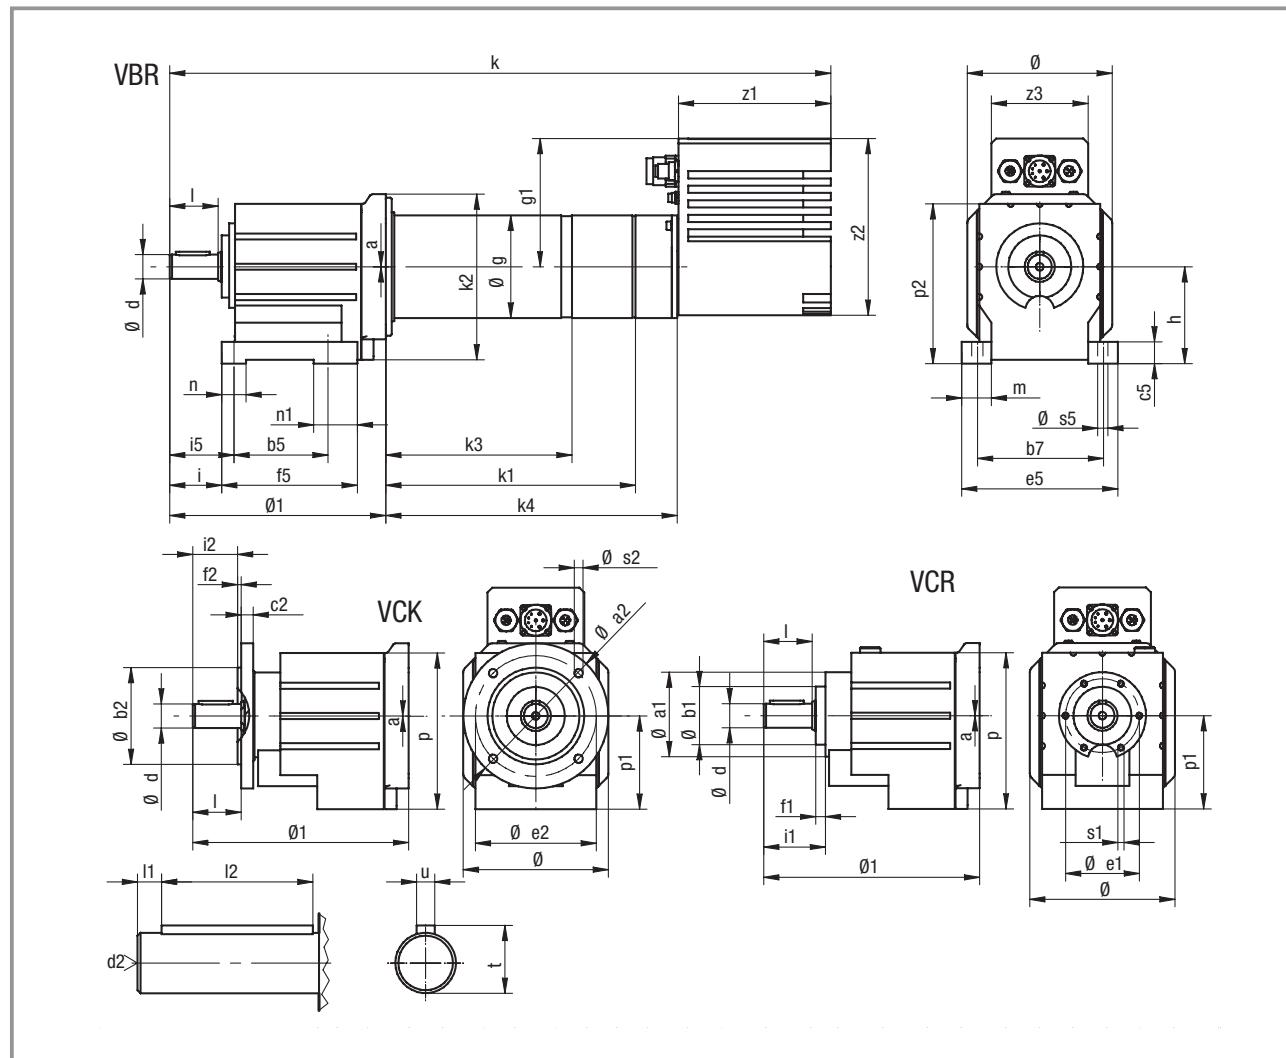

Geared motor	a	a1	a2	b1	b2	b5	b7	c2	c5	d	d2	e1	e2	e5	f1	f2	f5	g	g1	h	i	i1	i2	i5	
GST04-2GV□□-056C22		120		80						100				3											
	0	72	140	48	95	76	105	10	18	20	M6	61	115	130	8	3	112	85	106	80	43	51	40	53	
		160		110						130				3.5											

k1	k2	k	k3	k4	l	l1	l2	m	n	n1	o	o1	p	p1	p2	s1	s2	s5	t	u	z1	z2	z3	Weight [kg]
SR	SB	SB	XX	SB															7					
188.5	129	546	156	241	40	5	28	25	20	36	115	178.5	129	77	132	M5	9	9	22.5	6	126.5	146	80	11.5-13.0
																			9					

Dimensions in mm



## Drive selection

### Servo bevel geared motors GKR

#### Selection table, type GKR03-2GVA□-047C22

P <sub>r</sub> W	Supply voltage Servo Drive 230 V A			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
250	554.4	4.00	7.78	5.411	SDSGS□□047-22	
	482.2	5.00	6.98	6.222		
	421.9	5.00	6.48	7.111		
	366.8	6.00	5.79	8.178		
	329.6	7.00	5.35	9.101		
	286.6	8.00	4.65	10.466		
	257.7	9.00	4.18	11.640		
	224.1	10.00	3.64	13.386		
	198.5	11.00	3.22	15.111		
	172.6	13.00	2.80	17.378		
	154.9	15.00	2.51	19.365		
	134.7	17.00	2.19	22.270		
	119.8	19.00	2.21	25.051		
	104.1	22.00	1.92	28.808		
	92.0	25.00	1.70	32.593		
	80.0	28.00	1.47	37.481		
	71.1	32.00	1.40	42.222		
	61.8	37.00	1.22	48.556		
	55.7	41.00	1.10	53.889		
	48.4	45.00	0.96	61.972		

#### Additional order information


Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VAR	
	VAK	
	HAR	
	HAK	
Output flange diameter	110 mm	
	120 mm	
Hollow shaft bore	18 mm	
	20 mm	
Shaft position on type VAR		3 5 8
Flange/shaft position on type VAK		3 5
Flange position on type HAK		3 5
Mounting position		A B C D E F
Position of electrical connection		2 3 4 5

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03NBO (voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	



Dimensions, type GKR03-2GVA□-047C22

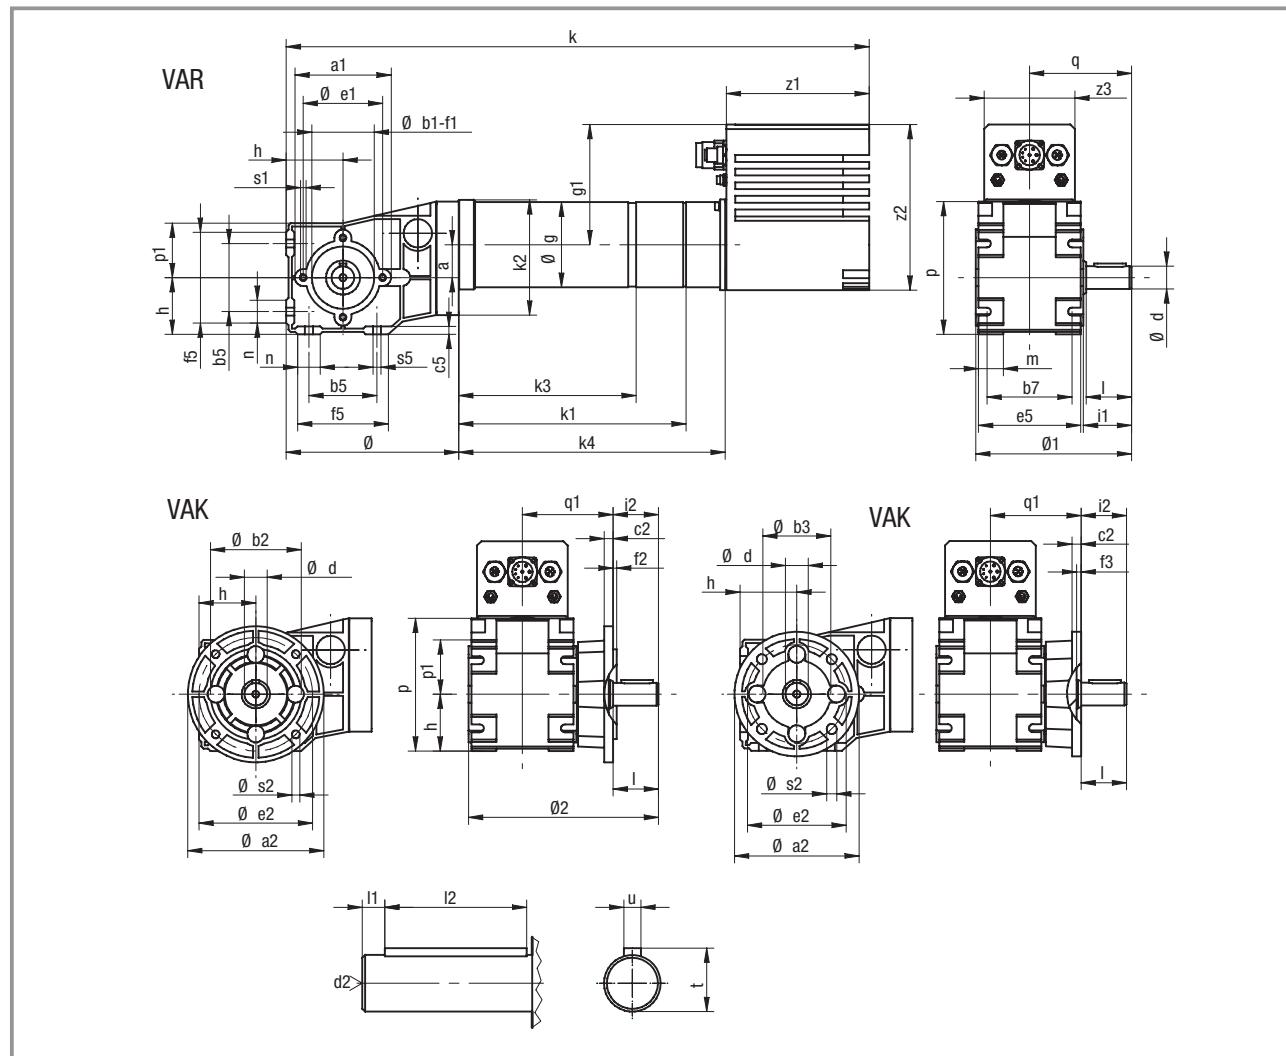

Geared motor	a	a1	a2	b1	b2	b3	b5	b7	c2	c5	d	d2	e1	e2	e5	f1	f2	f3	f5	g	g1	h	i1	i2
GKR03-2GVA□-047C22	29	84	120	55	80	-	60	75	8	7	20	M6	70	100	90	2.5	3	-	80	75	106	50	42.5	40
			110		-	60				20	M6		87				4							

k SB	k1 SR	k2	k3 XX	k4 SB	I	l1	l2	m	n	o	o1	o2	p	p1	q	q1	s1	s2	s5	t	u	z1	z2	z3	Weight [kg]
514.5	191	100	158.5	235	40	5	28	22	20	152	138	168	117	48	90	80	M6	7	6.6	22.5	6	126.5	146	80	8.0-9.5
																		9							


Dimensions in mm



## Drive selection

Servo bevel geared motors GKR

### Dimensions, type GKR03-2GHA□-047C22

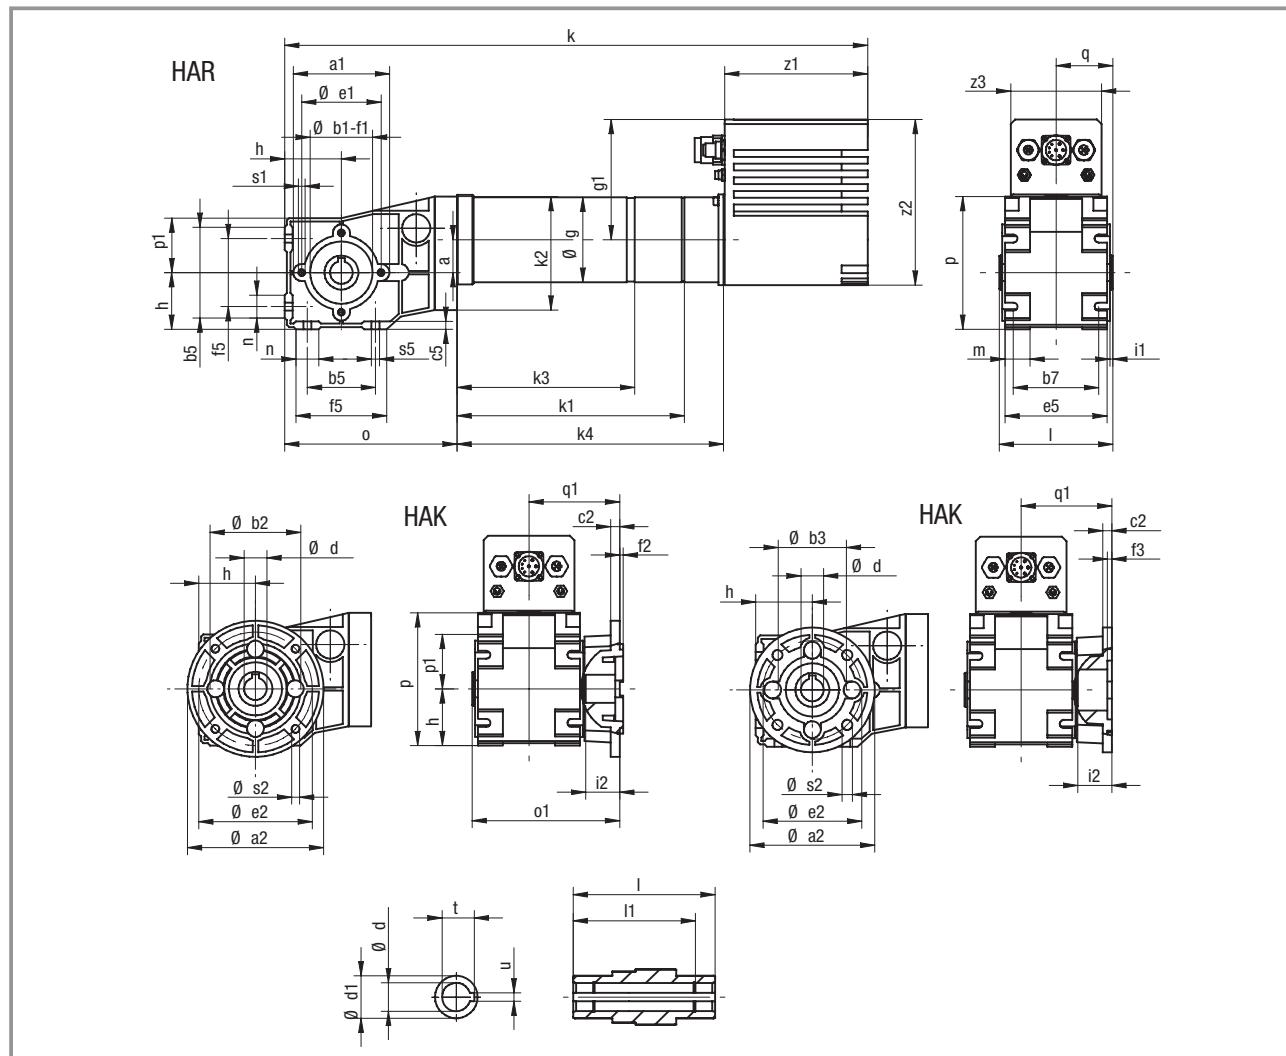

Geared motor	a	a1	a2	b1	b2	b3	b5	b7	c2	c5	d	d1	e1	e2	e5	f1	f2	f3	f5	g	g1	h	i1	i2
GKR03-2GHA□-047C22	29	84	120	55	80	-	60	75	8	7	18	30	70	100	90	3	3	-	80	75	106	50	2.5	30
		110		-	60				20	30		87				4								

k SB	k1 SR	k2	k3 XX	k4 SB	I	l1	m	n	o	o1	p	p1	q	q1	s1	s2	s5	t	u	z1	z2	z3	Weight [kg]	
514.5	191	100	158.5	235	100	86	22	20	152	130	117	48	50	80	M6	7	6.6	20.8	6	126.5	146	80	8.0-9.5	

Dimensions in mm



3

**Lenze**

930 fluxxtorque Servo Drives en 1/2007

**3-23**



## Drive selection

### Servo bevel geared motors GKR

#### Selection table, type GKR04-2GVA□-056C22

P <sub>r</sub> W	Supply voltage Servo Drive 230 V A			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
440	578.6	7	4.41	5.185	SDSGS□□056-22	
	503.1	8	4.34	5.963		
	421.9	9	4.31	7.111		
	366.8	11	4.34	8.178		
	329.6	12	4.36	9.101		
	286.6	14	4.14	10.466		
	262.0	15	3.84	11.449		
	236.3	17	3.46	12.698		
	205.4	19	3.01	14.603		
	192.9	21	2.82	15.556		
	167.7	24	2.45	17.889		
	153.4	26	2.25	19.556		
	133.4	30	1.95	22.489		
	119.1	33	1.98	25.185		
	103.6	39	1.72	28.963		
	94.0	42	1.56	31.919		
	81.7	49	1.36	36.707		
	75.0	53	1.25	40.000		
	65.2	61	1.18	46.000		


#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VAR	
	VAK	
	HAR	
	HAK	
Output flange diameter	110 mm	
	120 mm	
Hollow shaft bore	20 mm	
	25 mm	
Shaft position on type VAR		3 5 8
Flange/shaft position on type VAK		3 5
Flange position on type HAK		3 5
Mounting position		A B C D E F
Position of electrical connection		2 3 4 5

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931MKL03NBO (voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	

Dimensions, type GKR04-2GVA□-056C22

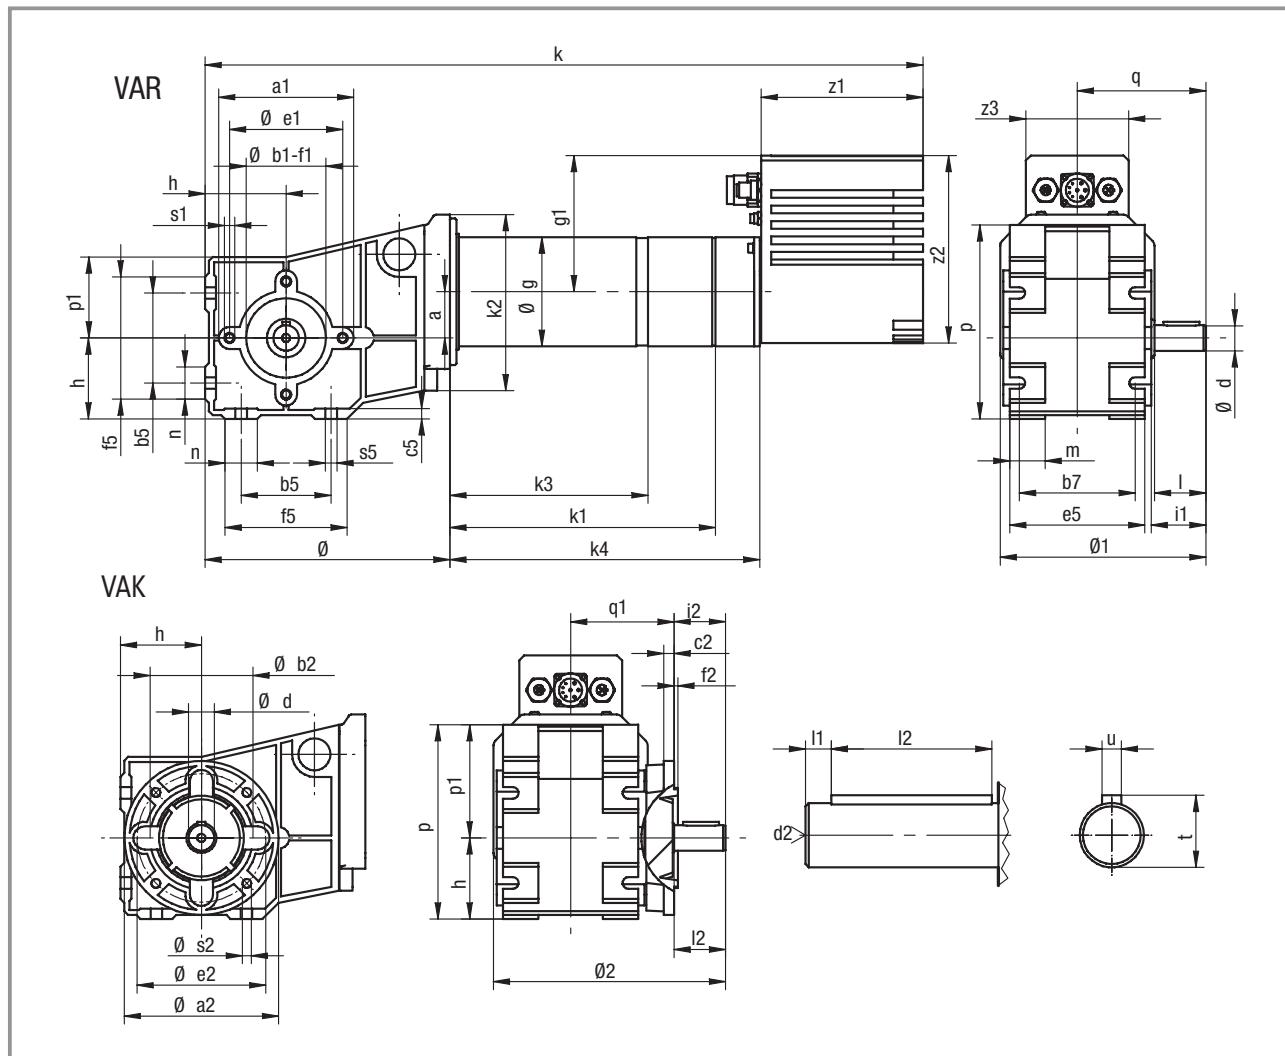

Geared motor	a	a1	a2	b1	b2	b5	b7	c2	c5	d	d2	e1	e2	e5	f1	f2	f5	g	g1	h	i1	i2	k	SB
GKR04-2GVA□-056C22	36	104	120	62	80	70	90	8	8	20	M6	88	100	105	3	3	95	85	106	63	42.5	20	558	
		160		110						25		130			3.5									


k1	k2	k3	k4	I	I1	I2	m	n	o	o1	o2	p	p1	q	q1	s1	s2	s5	t	u	z1	z2	z3	Weight [kg]
SR	105	156	241	40	5	28	28	25	190.5	140	168	151	63	60	80	M8	7	9	22.8	6	126.5	146	80	10.5-13.0
																	9	27	8					

Dimensions in mm



**Drive selection**  
Servo bevel geared motors GKR

Dimensions, type GKR04-2GHA□-056C22

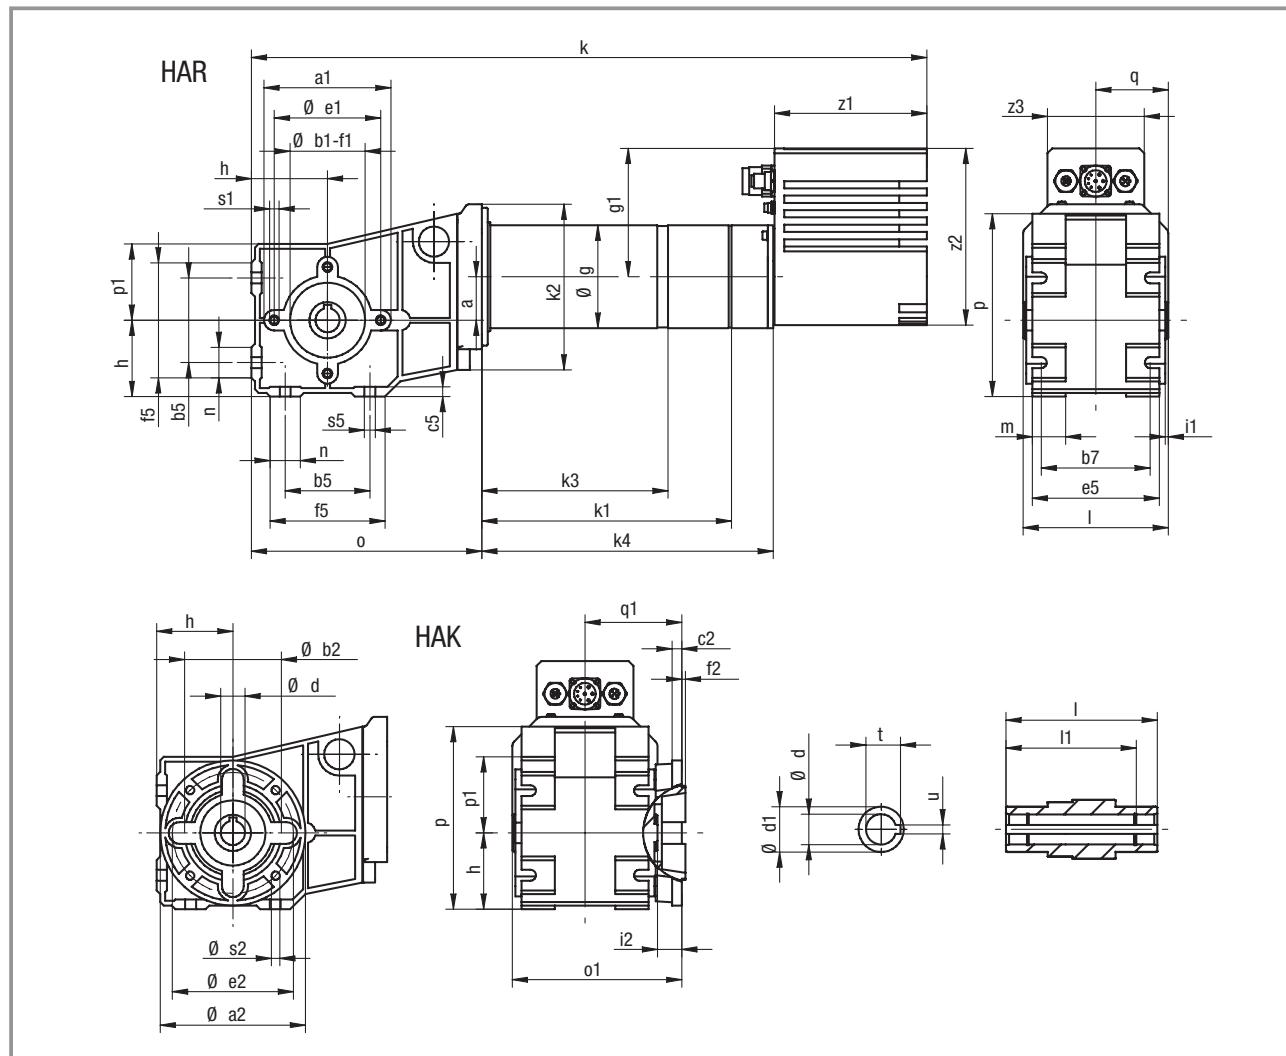

Geared motor	a	a1	a2	b1	b2	b5	b7	c2	c5	d	d1	e1	e2	e5	f1	f2	f5	g	g1	h	i1	i2	k	k1
	SB			SR						H7														
GKR04-2GHA□-056C22	36	104	120	62	80	70	90	8	8	20	30	88	100	105	3	3	95	85	106	63	2.5	20	558	188.5
					160		110				25	35		130			3.5							

k2	k3	k4	l	l1	m	n	o	o1	p	p1	q	q1	s1	s2	s5	t	u	z1	z2	z3	Weight [kg]	
105	156	241	120	106	28	25	190.5	140	151	63	60	80	M8	7	9	22.8	6	126.5	146	80	10.5-13.0	

Dimensions in mm




3

**Lenze**

930 fluxxtorque Servo Drives en 1/2007

**3-27**

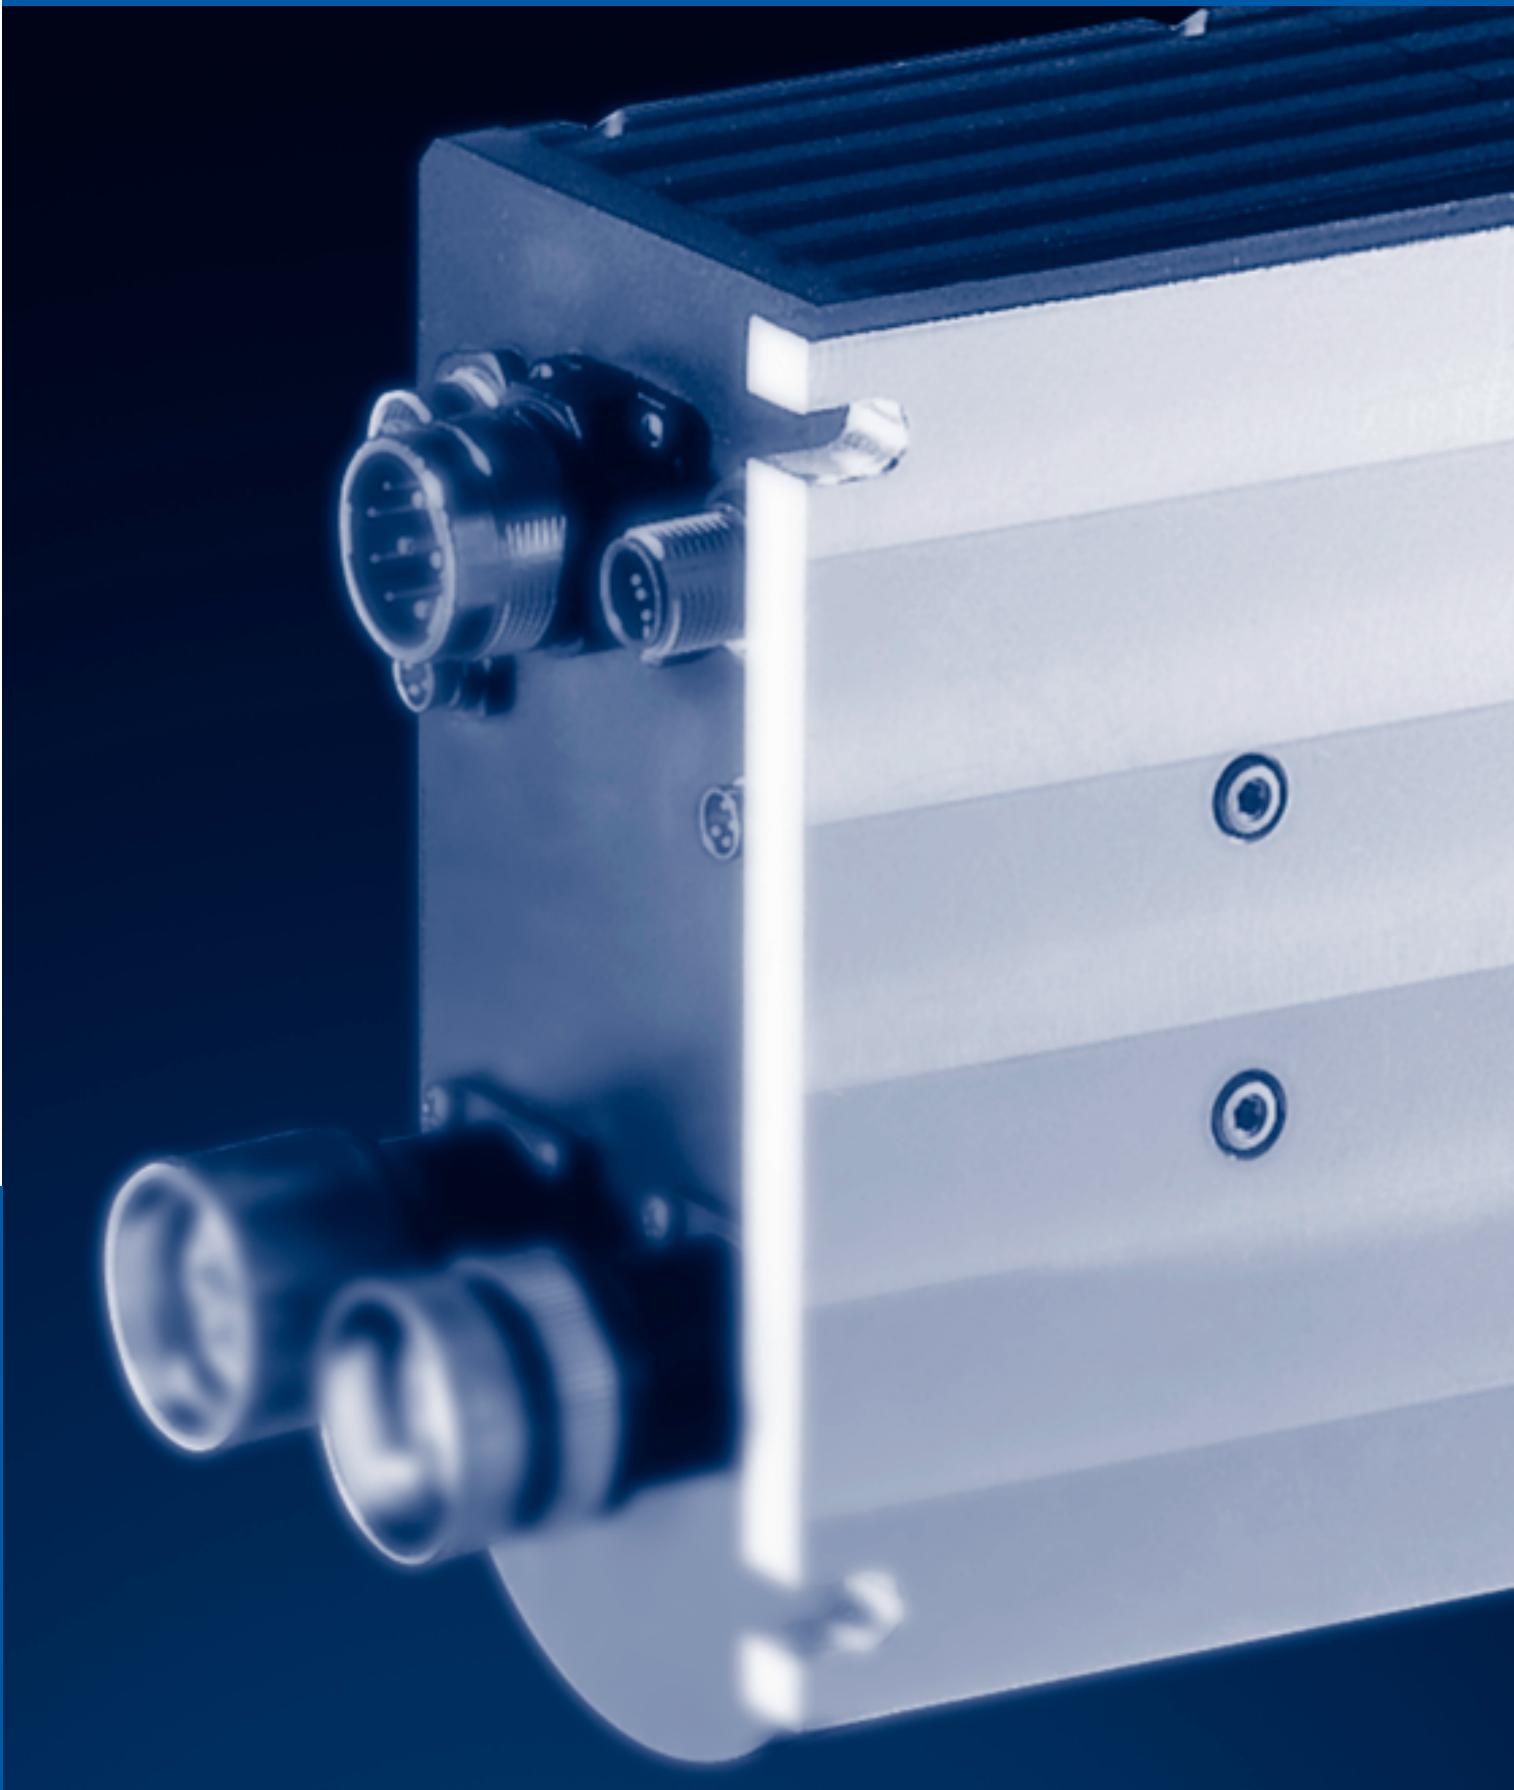

# Drive selection | 930 fluxxtorque Servo Drives

## Separate mounting 930W servo inverter for a 230 V AC supply voltage

930W servo inverter	4-2
SDSGS servo motors	4-4
Servo worm geared motors SSN	4-6
Servo planetary geared motors SPL	4-10
Servo helical geared motors GST	4-16
Servo bevel geared motors GKR	4-24



## Drive selection 930W servo inverter

### Selection table, type 931W□N□□

P <sub>r</sub> W	Description	Version	Controller type	Selection Please tick
500	230 V AC Resolver feedback Brake control RS232 PC interface	CAN bus I/O	931WCN10	
500		CAN bus Local CAN	931WCN20	
500		PROFIBUS I/O	931WPN10	
500		PROFIBUS Local CAN	931WPN20	



### Additional order information

#### Servo Drives accessories

Accessories	930FI020000 (Y distributor, 2x dig. IN)	
System cable	931WKL03NBS (motor connection, 2.5 m)	
	931WKR03NBS (resolver connection, 2.5 m)	
	931MKL03NBO (voltage supply, 3 m)	
	931MKC03UBS (CAN bus system cable plug/socket, 3 m)	
	931MKC03UOB (CAN bus system cable open/socket, 3 m)	
	931MKP03UBS (PROFIBUS system cable plug/socket, 3 m)	
	931MKP03UOB (PROFIBUS system cable open/socket, 3 m)	
	931MKS03UBS (RS232 PC port)	
	931MKI03UBS (Local CAN system cable)	
	931MKF03USO (Y distributor system cable, 3 m)	



Dimensions, type 931W□N□□

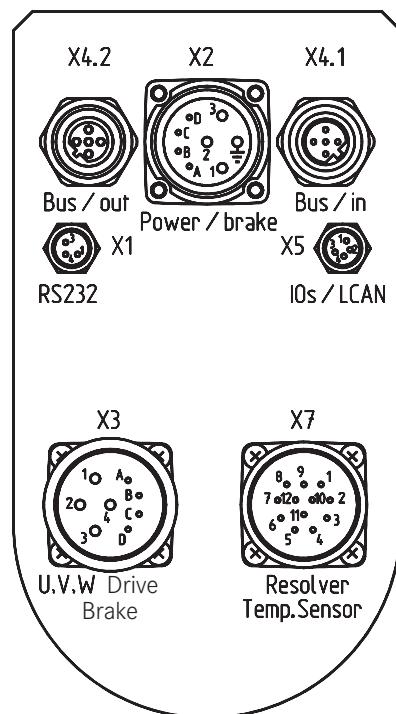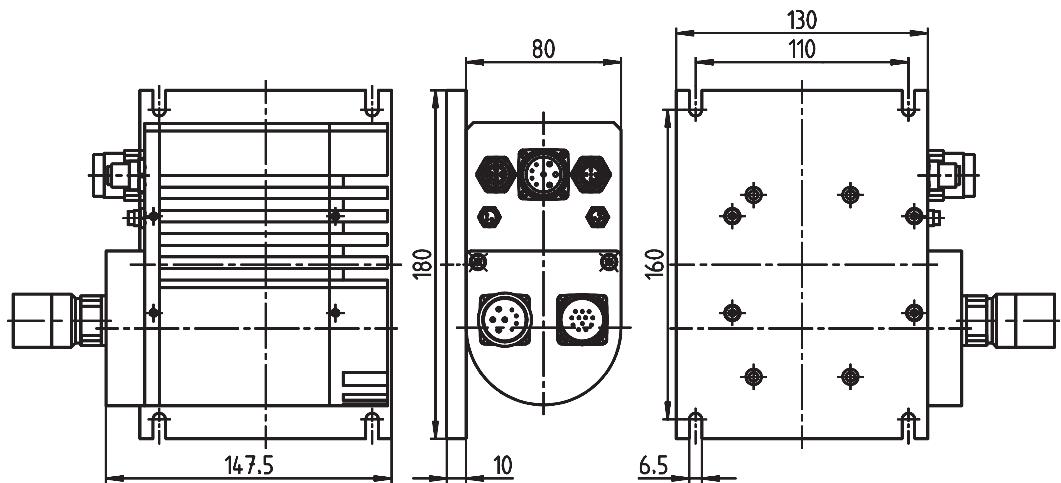



## Drive selection SDSGS servo motors

### Selection table, type SDSGS□□□□□-22


P <sub>r</sub> W	Supply voltage Servo Drive 230 V AC		Version A-side	Motor type	Selection Please tick
	n <sub>1</sub> rpm	M <sub>1</sub> Nm			
250	3000	0.80	IEC56 B14 C80	SDSGS□□047-22	
250	3000	0.80	IEC63 B14 C90	SDSGS□□047-22	
500	3000	1.60	IEC63 B14 C90	SDSGS□□056-22	

### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Position of electrical connection		1




Dimensions Type SDSGS□□□□-22

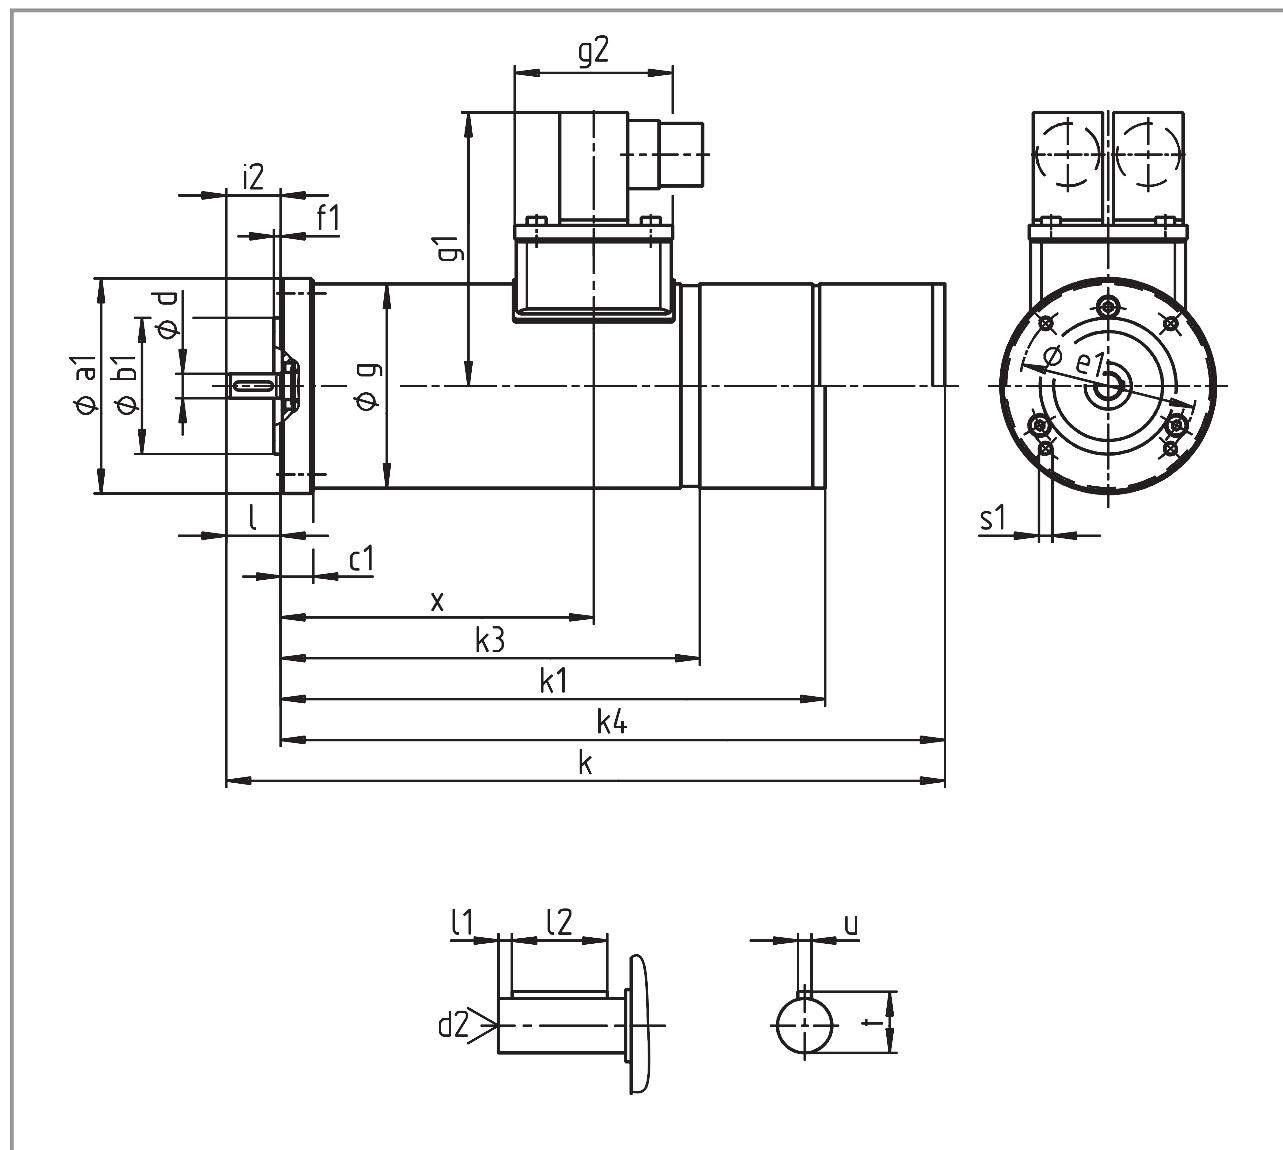

Motor type	Frame size	$a_1$	$b_1$ $j_7$	$c_1$	$d$ $k_6$	$d_2$	$e_1$	$f_1$	$g$	$g_1$	$g_2$	$i_2$	$k$ $BS$	$RS$	$k_1$	AG
SDSGS□□047-22	IEC56C80	79	50	12	9	M3	65	2.5	75	101	58	20	253	189	200	
SDSGS□□047-22	IEC63C90	89	60	12	11	M4	75	2.5	75	101	58	23	256	189	200	
SDSGS□□056-22	IEC63C90	89	60	12	11	M4	75	2.5	85	106	58	23	271	196	207	

Motor type	Frame size	$k_3$ $XX$	$k_4$ $BS$	I	$l_1$	$l_2$	$s_1$	r	u	x	Weight [kg]	
SDSGS□□047-22	IEC56C80	156	233	244	20	3	14	M5	10.2	3	115	3.0-4.0
SDSGS□□047-22	IEC63C90	156	233	244	23	3	18	M5	12.5	4	115	3.0-4.0
SDSGS□□056-22	IEC63C90	163	248	260	23	3	18	M5	12.5	4	120	4.0-5.5

Dimensions in mm

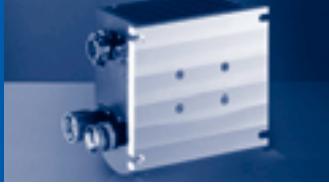

## Drive selection

### Servo worm geared motors SSN

#### Selection table, type SSN40-1G□□□-047C22


P <sub>r</sub> W	Rated data			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
250	441	4.57	7.66	6.75	SDSGS□□047-22	
	300	6.48	5.40	10		
	200	8.88	3.72	15		
	150	11.36	2.99	20		
	120	12.80	2.27	25		
	100	14.88	2.42	30		
	75	17.92	1.90	40		
	60	21.60	1.48	50		
	50	18.24	1.75	60		
	38	24.00	0.96	80		

#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VAR	
	DAR	
	VAL	
	HAR	
	VCR	
	DCR	
	VCL	
	HCR	
Shaft position on version VAR/VCR		3 5 8
Flange/shaft position on version VAL/VCL		3 5
Mounting position		A B C D E F
Position of electrical connection		2 3 4 5



Dimensions, type SSN40-1G□□□-047C22

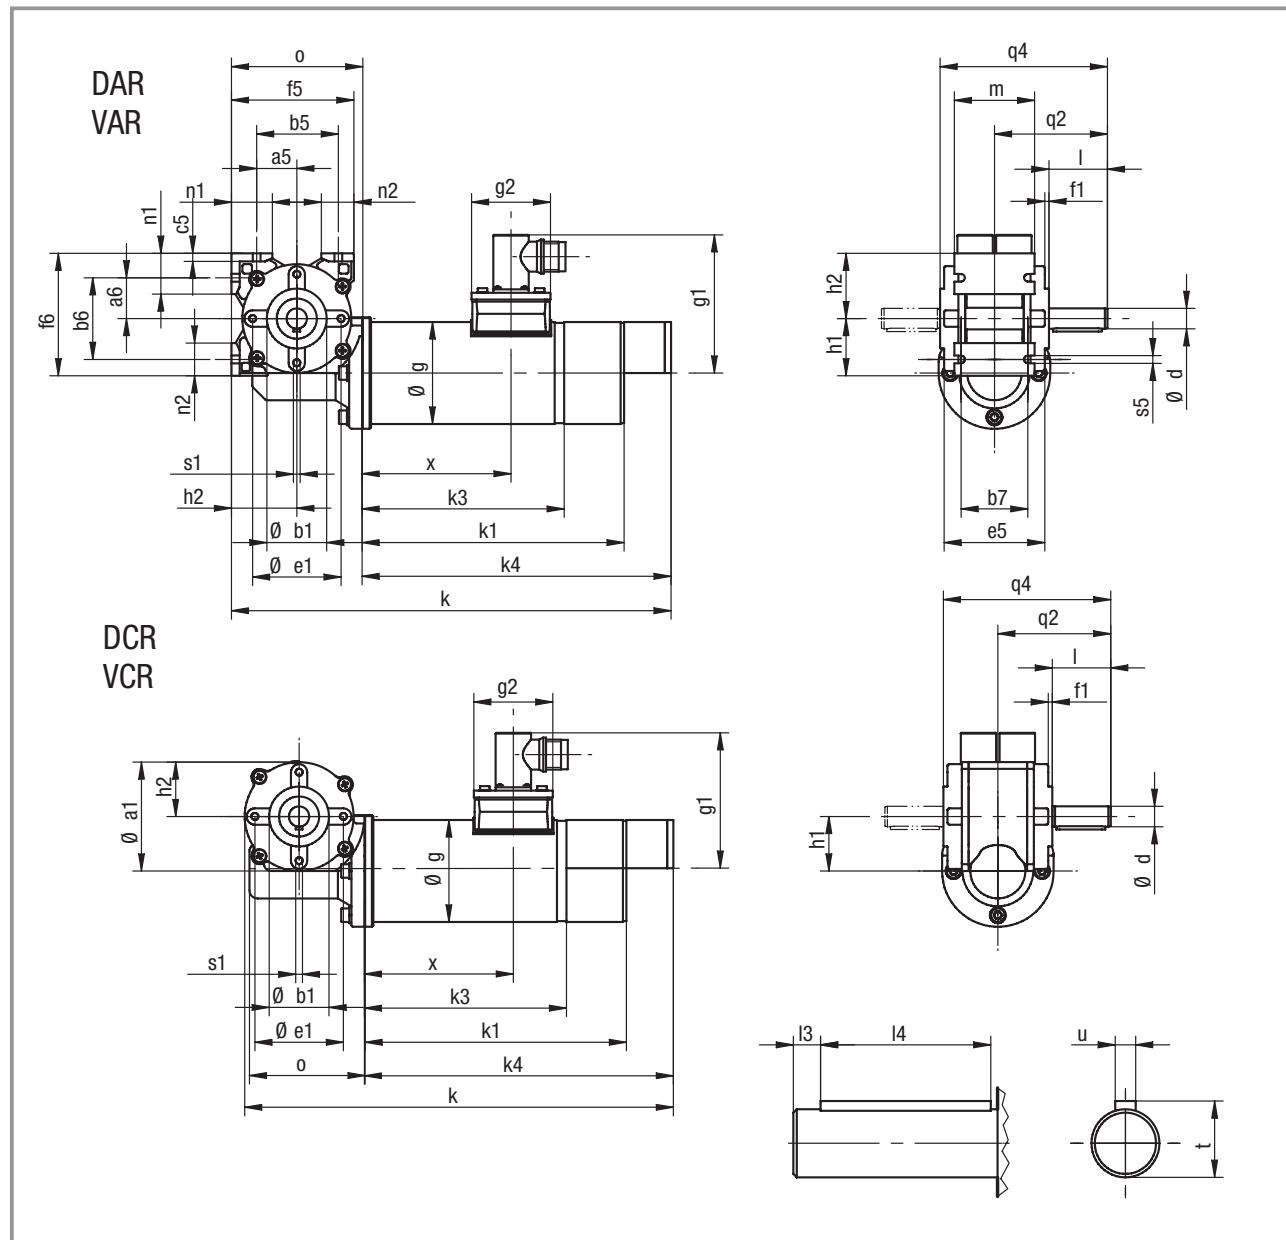

Geared motor	$a_1$	$a_5$	$a_6$	$b_1$ $h10$	$b_5$	$b_6$	$b_7$	$c_5$	$d$ $h6$	$e_1$	$e_5$	$f_1$	$f_5$	$f_6$	$g$	$g_1$	$g_2$	$h_1$	$h_2$	$k$ $BS$
SSN40-1GVAR-047C22	77	30	30	44	60	60	50	6	15	65	80	2	90	90	75	101	58	40	48	323
SSN40-1GVCR-047C22	77	—	—	44	—	—	—	—	15	65	80	2	—	—	75	101	58	40	40	315


Geared motor	$k_1$ $RS$	$k_1$ $AG$	$k_3$ $XX$	$k_4$ $BS$	$k_4$ $BA$	$l$	$l_3$	$l_4$	$m$	$n_1$	$n_2$	$o$	$q_2$	$q_4$	$s_1$	$s_5$	$t$	$u$	$x$	Weight [kg]
SSN40-1GVAR-047C22	183	194.5	150.5	227	238.5	43	4	36	59	30	24	96	83	123	M6	5.5	17	5	109.5	4.5-5.8
SSN40-1GVCR-047C22	183	194.5	150.5	227	238.5	43	4	36	—	—	88	83	123	M6	—	17	5	109.5	4.5-5.8	

Dimensions in mm



**Drive selection**  
Servo worm geared motors SSN

Dimensions, type SSN40-1G□□□-047C22

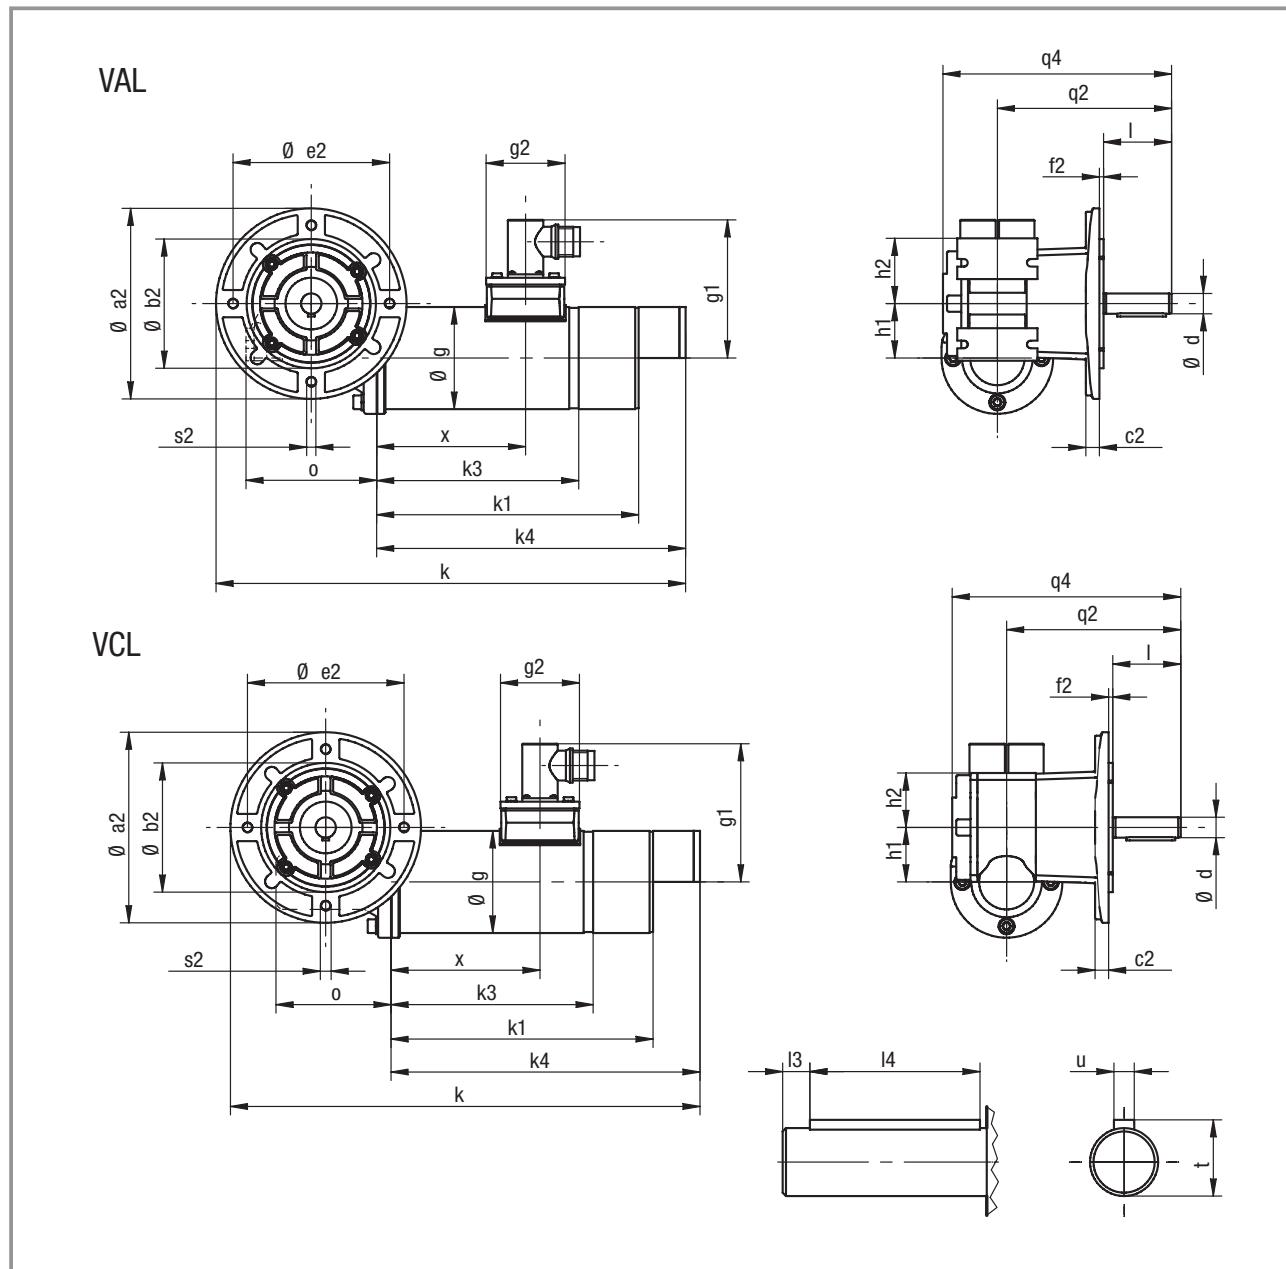


Geared motor	a <sub>2</sub>	b <sub>2</sub> j7	c <sub>2</sub>	d h6	e <sub>2</sub>	f <sub>2</sub>	g	g <sub>1</sub>	g <sub>2</sub>	h <sub>1</sub>	h <sub>2</sub>	k BS	k <sub>1</sub> RS
SSN40-1GVAL-047C22	140	95	10	15	115	3	75	101	58	40	48	345	183
SSN40-1GVCL-047C22	140	95	10	15	115	3	75	101	58	40	40	345	183

Geared motor	k <sub>1</sub> AG	k <sub>3</sub> XX	k <sub>4</sub> BS	k <sub>4</sub> BA	l	l <sub>3</sub>	l <sub>4</sub>	o	q <sub>2</sub>	q <sub>4</sub>	s <sub>2</sub>	t	u	x	Weight [kg]
SSN40-1GVAL-047C22	194.5	150.5	227	238.5	50	4	36	96	128	168	M8	17	5	109.5	4.5-5.8
SSN40-1GVCL-047C22	194.5	150.5	227	238.5	50	4	36	88	128	168	M8	17	5	109.5	4.5-5.8

Dimensions in mm

Dimensions, type **SSN40-1G□□□-047C22**

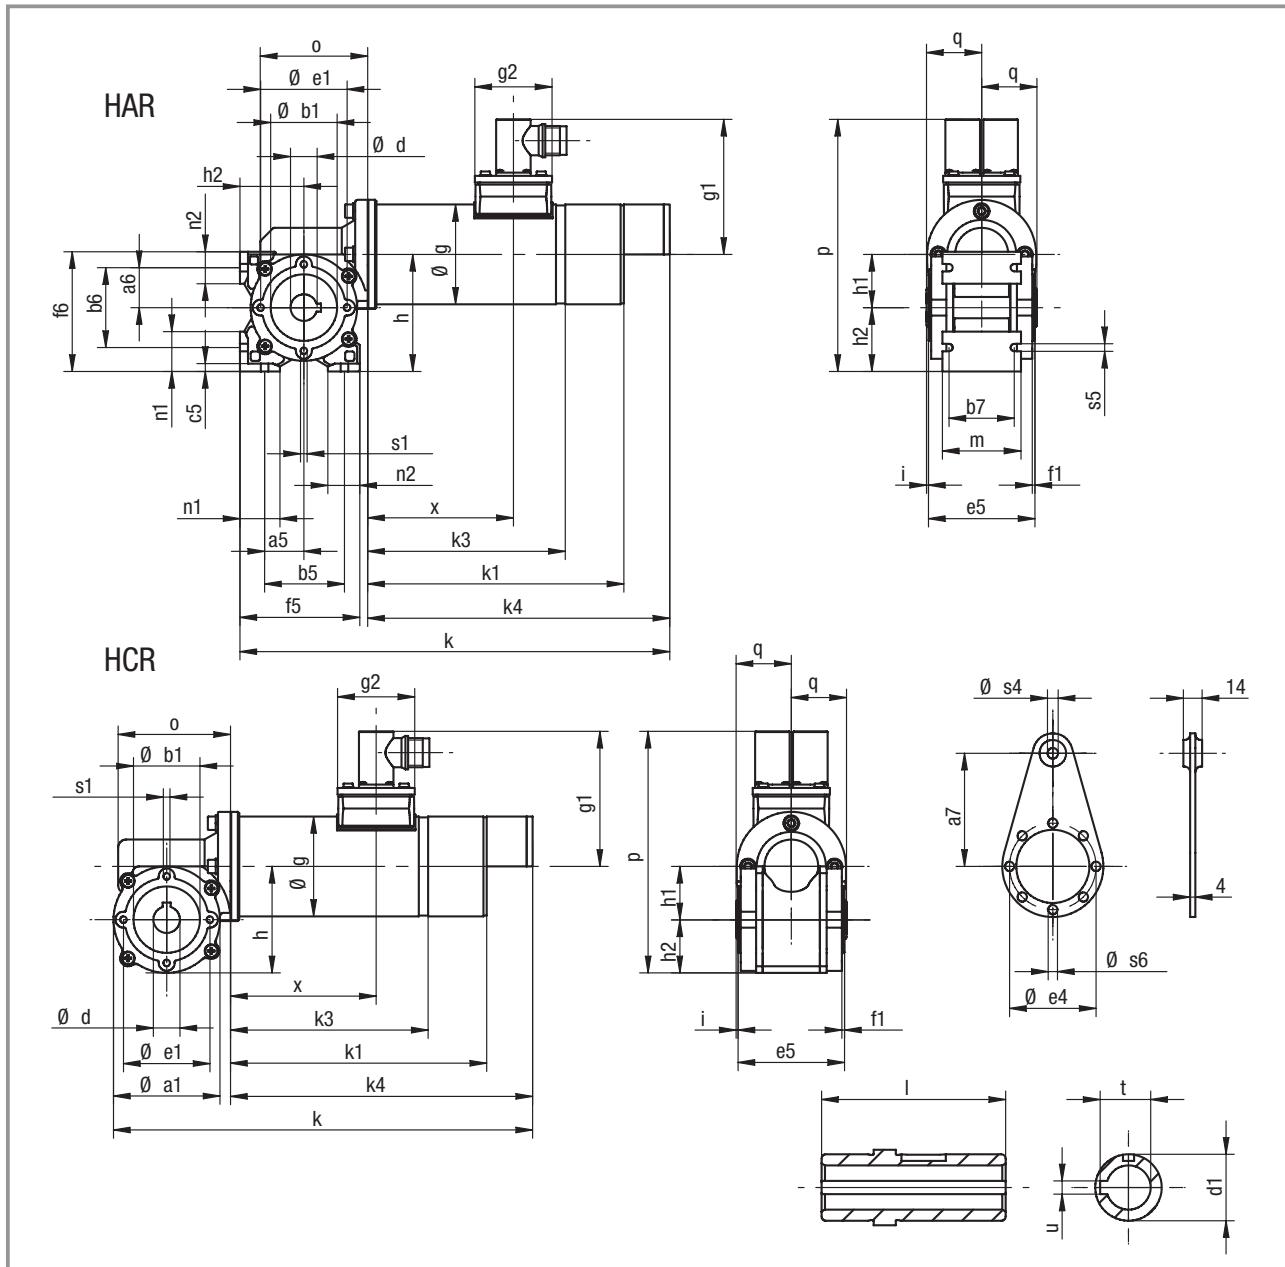

Geared motor	a <sub>1</sub>	a <sub>5</sub>	a <sub>6</sub>	a <sub>7</sub> h8	b <sub>1</sub>	b <sub>5</sub>	b <sub>6</sub>	b <sub>7</sub>	c <sub>5</sub> H7	d	d <sub>1</sub>	e <sub>1</sub>	e <sub>4</sub>	e <sub>5</sub>	f <sub>1</sub>	f <sub>5</sub>	g	g <sub>1</sub>	g <sub>2</sub>	h	h <sub>1</sub>	h <sub>2</sub>	
SSN40-1GHAR-047C22	77	30	30	85	50	60	60	50	6	20	30	65	65	80	2	90	90	75	101	58	88	40	48
SSN40-1GHCR-047C22	77	—	—	85	50	—	—	—	—	20	30	65	65	80	2	—	75	101	58	80	40	40	

Geared motor	i	k BS	k <sub>1</sub> RS	k <sub>1</sub> AG	k <sub>3</sub> XX	k <sub>4</sub> BS	k <sub>4</sub> BA	l	m	n <sub>1</sub>	n <sub>2</sub>	o	p	q	s <sub>1</sub>	s <sub>4</sub>	s <sub>5</sub>	s <sub>6</sub>	t	u	x	Weight [kg]
SSN40-1GHAR-047C22	1.5	323	183	194.5	150.5	227	238.5	83	59	30	24	96	189	41.5	M6	8	5.5	7	22.8	6	109.5	4.5-5.8
SSN40-1GHCR-047C22	1.5	315	183	194.5	150.5	227	238.5	83	—	—	—	88	181	41.5	M6	8	—	7	22.8	6	109.5	4.5-5.8

Dimensions in mm



## Drive selection

### Servo planetary geared motors SPL


#### Selection table, type SPL62-□GVCR-047N22

P <sub>r</sub> W	Rated data			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
250	811	2.37	3.38	3.70	SDSGS□□047-22	
	444	4.32	1.85	6.75		
	218	8.24	3.03	13.73		
	120	15.01	1.67	25.01		
	86	20.98	1.19	34.97		
	66	27.34	0.91	45.56		
	59	28.50	1.75	50.89		
	42	39.85	1.25	71.16		

#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Position of electrical connection		1

Dimensions, type SPL62-□GVCR-047N22

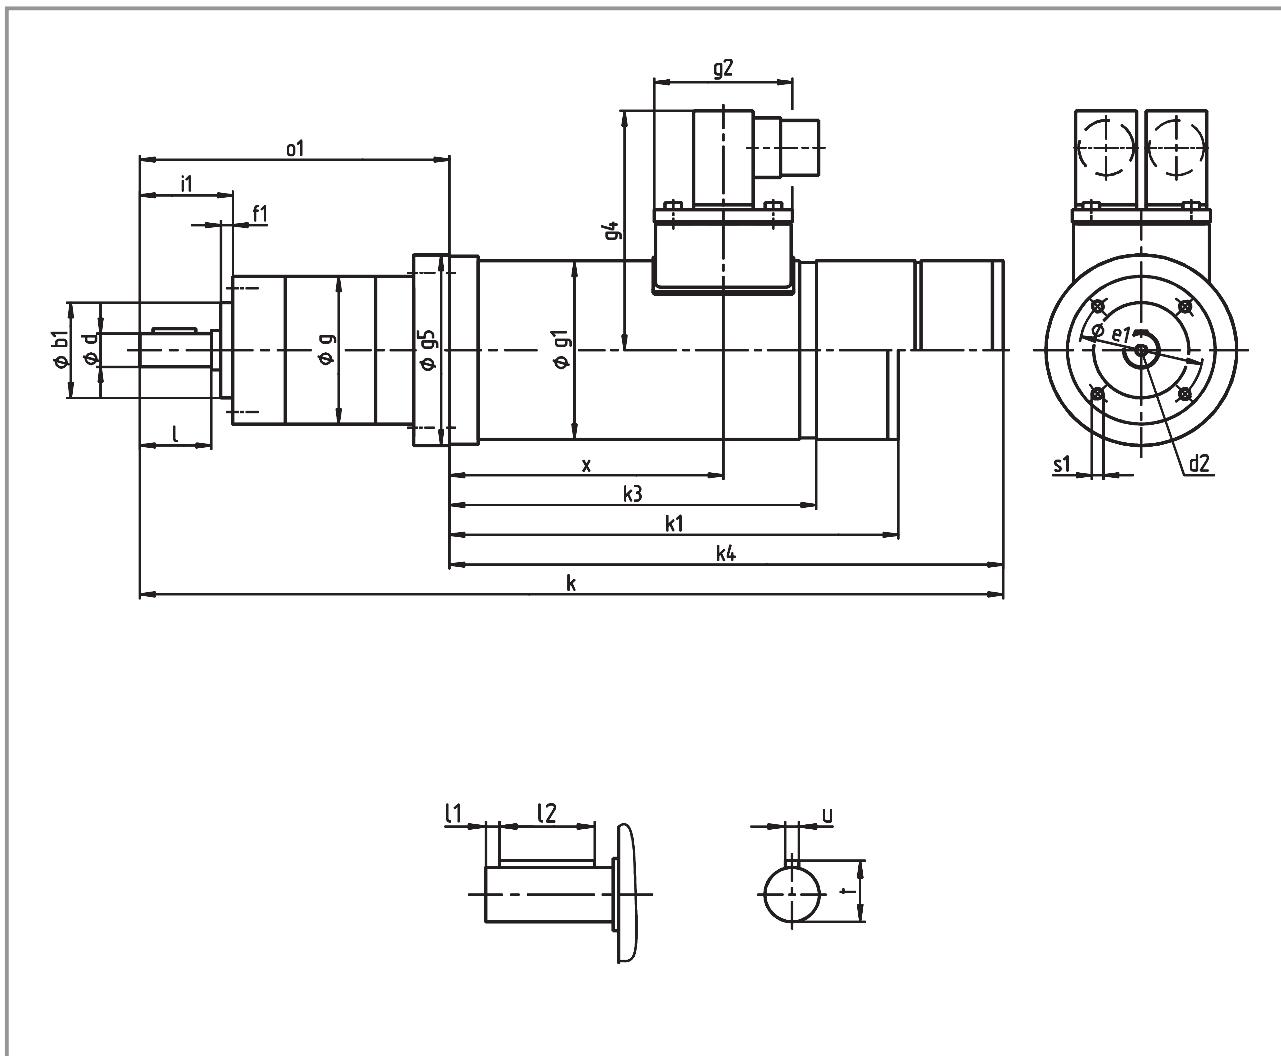

Geared motor	Ratio i	$b1$ $j7$	$d$ $h7$	$d2$	$e1$	$f1$	$g$	$g1$	$g2$	$g4$	$g5$	$i1$	$k$ BS
SPL62-□GVCR-047N22	3.7;6.7												348
	14...46	40	14	M5	52	5	62	75	58	101	80	39	364
	51 ... 71												380

$k1$ RS	$k1$ AG	$k3$ XX	$k4$ BS	$k4$ BA	$l$	$l1$	$l2$	$\text{o}1$	$s1$	$t$	$u$	$x$	Weight [kg]
189	200	156	233	244	30	5.5	18	115	M5x10	16	5	115	3.8-4.8
								131					4.2-5.2
								147					4.6-5.6

Dimensions in mm



## Drive selection

### Servo planetary geared motors SPL


#### Selection table, type SPL81-□GVCR-047N22

P <sub>r</sub> W	Rated data			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
250	811	2.37	8.45	3.70	SDSGS□□047-22	
	444	4.32	4.63	6.75		
	218	8.24	7.28	13.73		
	120	15.01	4.00	25.01		
	86	20.98	2.86	34.97		
	66	27.34	2.19	45.56		
	59	28.50	4.21	50.89		
	42	39.85	3.01	71.16		
	30	55.72	2.15	99.50		
	24	69.42	1.73	123.97		

#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Position of electrical connection		1

Dimensions, type SPL81-□GVCR-047N22

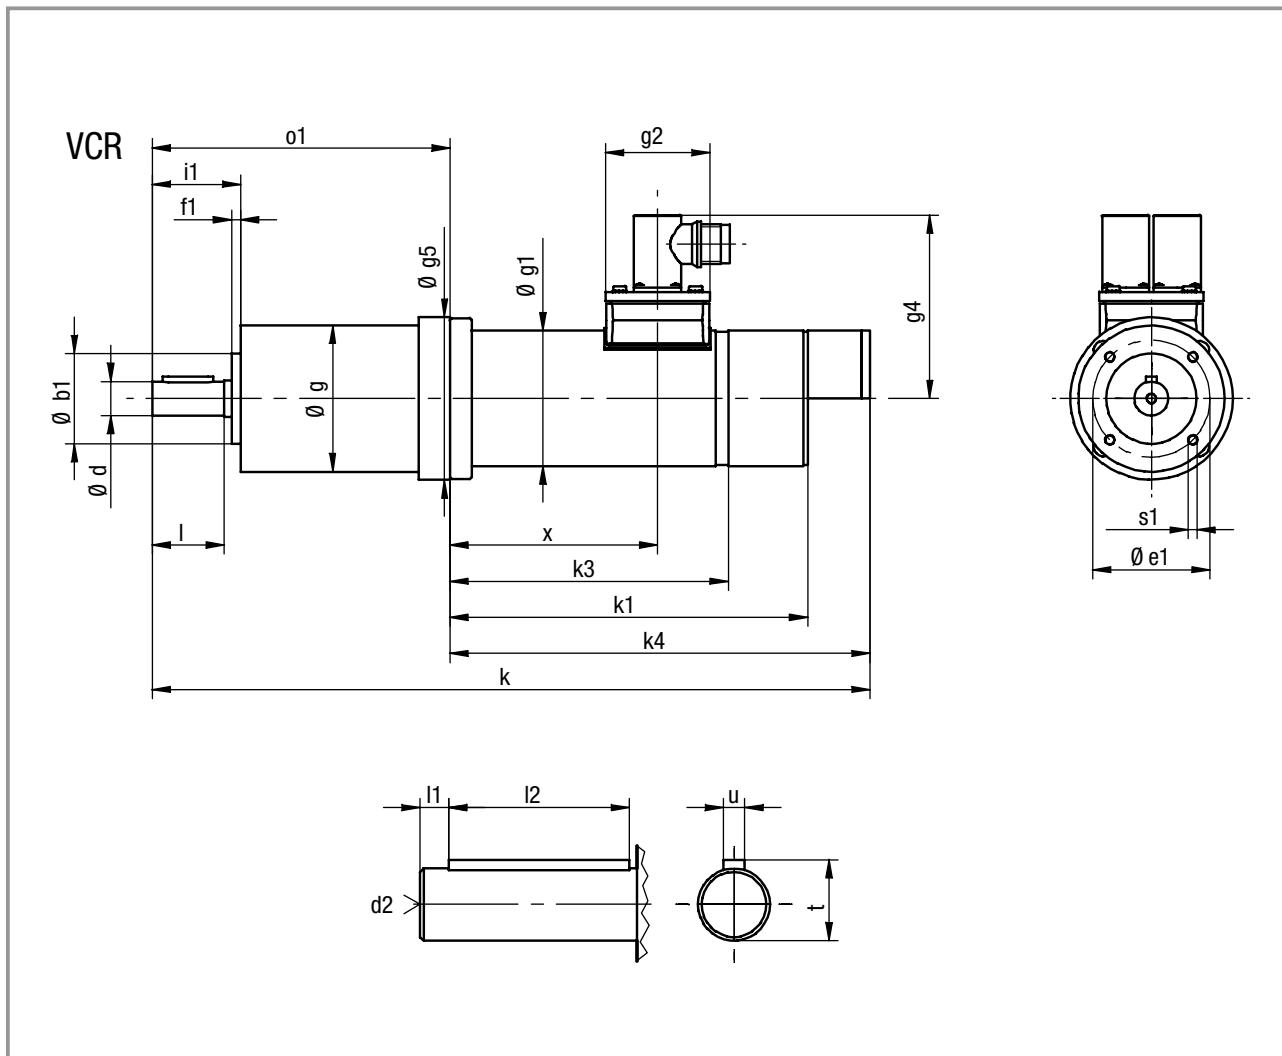

Geared motor	Ratio i	b1 j7	d h7	d2	e1	f1	g	g1	g2	g4	g5	i1	k BS
SPL81-□GVCR-047N22	3.7;6.7												388
	14...46	50	19	M6	65	5	81	75	58	101	90	49	409
	51...124												431

k1 RS	k1 AG	k3 XX	k4 BS	k4 BA	I	l1	l2	o1	s1	t	u	x	Weight [kg]
189	200	156	233	244	40	6	28	144				4.8-5.8	
								165	M6x12	21.5	6	115	5.5-6.5
								187					6.2-7.2

Dimensions in mm



## Drive selection

### Servo planetary geared motors SPL


#### Selection table, type SPL81-□GVCR-056N22

P <sub>r</sub> W	Rated data			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
500	811	4.74	4.22	3.700	SDSGS□□056-22	
	444	8.64	2.31	6.750		
	218	16.48	3.64	13.730		
	120	30.01	2.00	25.010		
	86	41.96	1.43	34.970		
	66	54.67	1.10	45.560		
	59	57.00	2.11	50.890		
	42	79.70	1.51	71.160		
	30	111.44	1.08	99.500		
	24	120.00	0.86	123.970		

#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Position of electrical connection		1

Dimensions, type SPL81-□GVCR-056N22

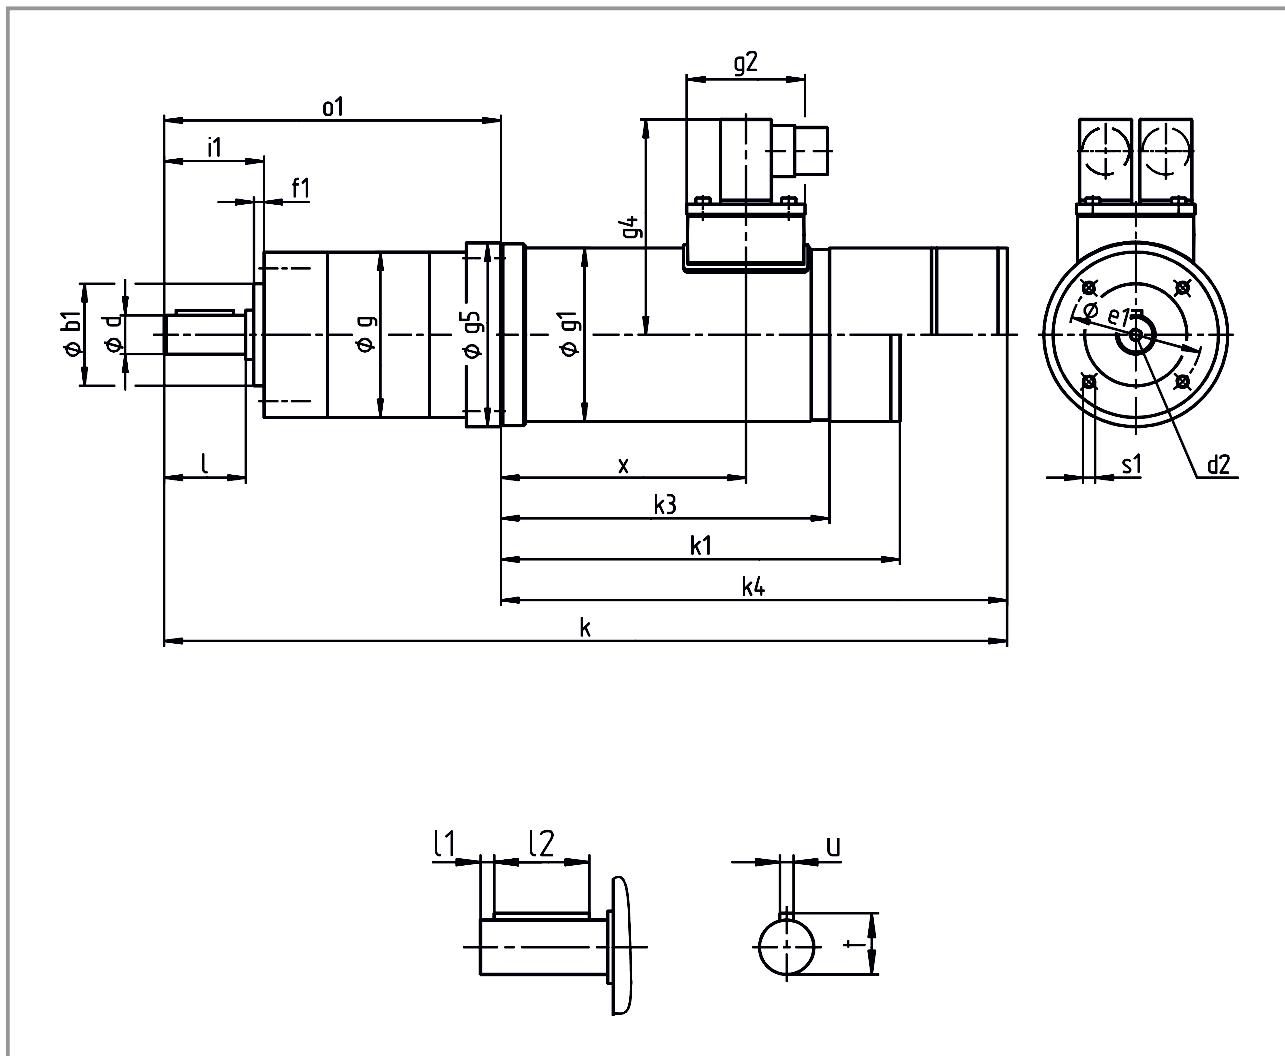

Geared motor	Ratio i	b1 j7	d h7	d2	e1	f1	g	g1	g2	g4	g5	i1	k BS
SPL81-□GVCR-056N22	3.7;6.7												392
	14...46	50	19	M6	65	5	81	85	58	106	90	49	413
	51...124												435

k1 RS	k1 AG	k3 XX	k4 BS	k4 BA	I	l1	l2	o1	s1	t	u	x	Weight [kg]
196	207	163	248	260	40	6	28	144					6.1-7.6
								165	M6x12	21.5	6	120	6.8-8.3
								187					7.5-9.0

Dimensions in mm



## Drive selection

### Servo helical geared motors GST

#### Selection table, type GST03-2GV□□-035C22


P <sub>r</sub> W	Rated data			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
140	1155.20	1.00	13.37	2.60	SDSGS□□035-22	
	879.00	1.00	10.85	3.41		
	686.80	2.00	9.01	4.37		
	564.80	2.00	9.59	5.31		
	502.90	3.00	8.93	5.97		
	429.70	3.00	7.96	6.98		
	382.70	3.00	7.68	7.84		
	335.80	4.00	6.74	8.94		
	299.00	4.00	6.46	10.03		
	262.50	5.00	5.87	11.43		
	233.80	6.00	5.59	12.83		
	202.20	6.00	4.99	14.84		
	180.10	7.00	5.28	16.66		
	157.80	8.00	4.75	19.01		
	140.50	9.00	4.45	21.35		
	122.00	11.00	3.95	24.60		
	108.60	12.00	3.52	27.62		
	93.80	14.00	3.04	32.00		
	83.50	16.00	2.71	35.93		
	72.40	18.00	2.35	41.46		
	64.40	20.00	2.24	46.55		
	56.70	23.00	1.97	52.91		
	50.50	26.00	1.75	59.41		

#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VBR	
	VCR	
	VCK	
Output flange diameter	120 mm	
	140 mm	
	160 mm	
Mounting position		A B C D E F
Position of electrical connection		2 3 4 5



Dimensions, type GST03-2GV□□-035C22

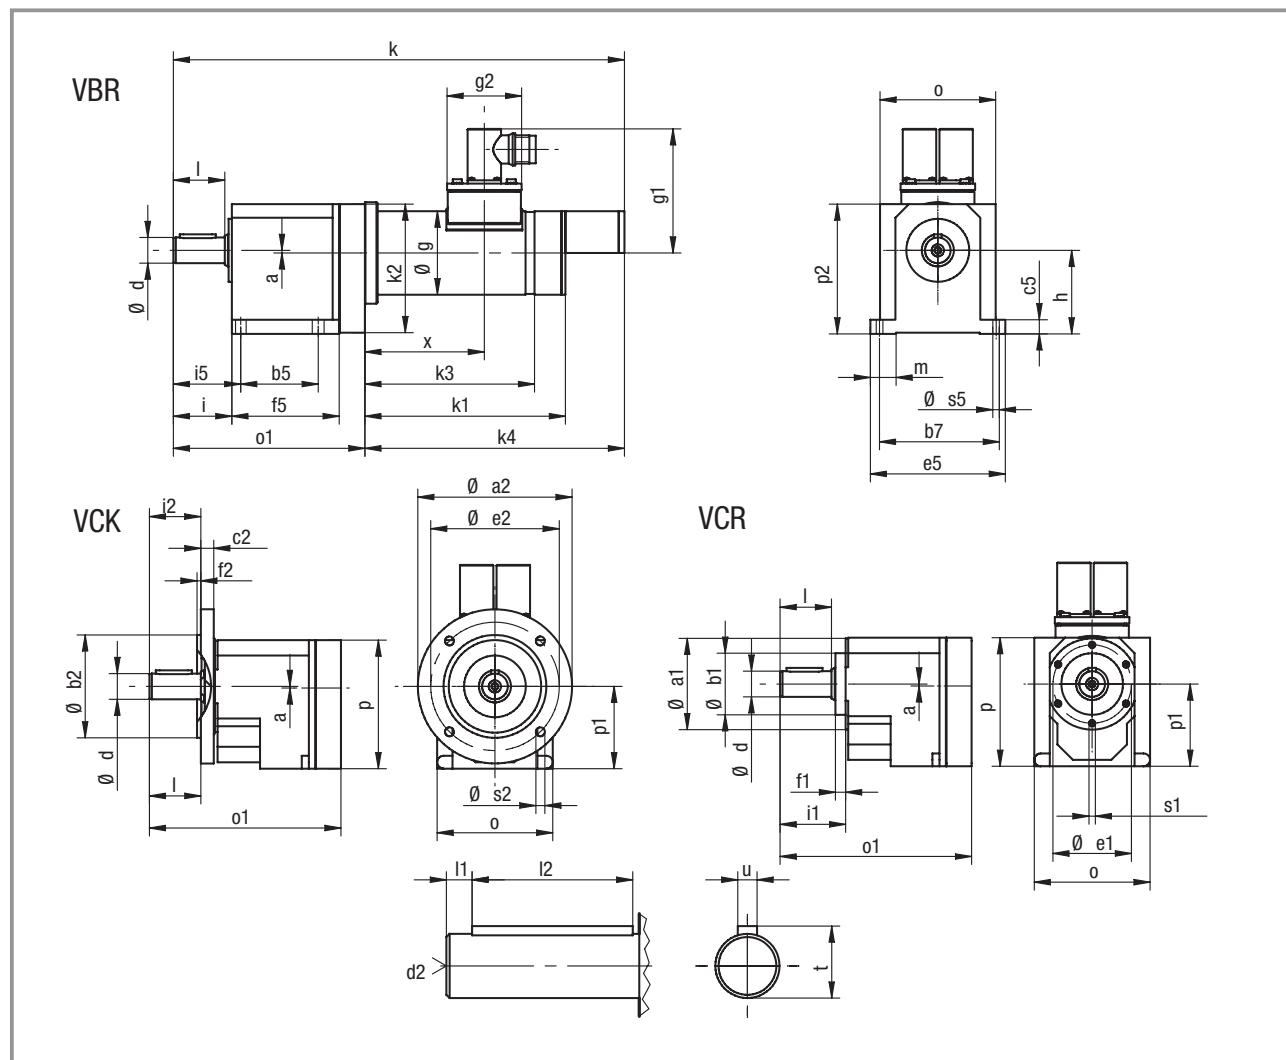

Geared motor	a	a1	a2	b1 h7	b2 j7	b5	b7	c2	c5	d k6	d2	e1	e2	e5	f1	f2	f5	g	g1	g2	h	i	i1	i2	
GST03-2GV□□-035C22			120		80							100				3									
	2	71	140	48	95	60	91	10	11	20	M6	61	115	105	8	3	84	65	95	58	65	46	51	40	
			160		110										130		3.5								

i5	k	k1	k1	k2	k3	k4	k4	l	l1	l2	m	o	o1	p	p1	p2	s1	s2	s5	t	u	x	Weight [kg]
52	351.5	166.5	178	100	136	202	222.5	40	5	28	20	90	149.5	100	64	101	M5	9	6.6	22.5	6	93	5.0-6.5

Dimensions in mm



## Drive selection

### Servo helical geared motors GST

#### Selection table, type GST03-2GV□□-047C22


P <sub>r</sub> W	Rated data			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
250	1155.2	2.00	7.52	2.597	SDSGS□□-047-22	
	879.0	3.00	6.10	3.413		
	686.8	3.00	5.07	4.368		
	564.8	4.00	5.39	5.312		
	502.9	5.00	5.02	5.965		
	429.7	5.00	4.48	6.982		
	382.7	6.00	4.32	7.840		
	335.8	7.00	3.79	8.935		
	299.0	8.00	3.63	10.033		
	262.5	9.00	3.30	11.429		
	233.8	10.00	3.15	12.833		
	202.2	11.00	2.81	14.836		
	180.1	13.00	2.97	16.660		
	157.8	15.00	2.67	19.013		
	140.5	17.00	2.50	21.350		
	122.0	19.00	2.22	24.595		
	108.6	21.00	1.98	27.618		
	93.8	25.00	1.71	32.000		
	83.5	28.00	1.52	35.933		
	72.4	32.00	1.32	41.455		
	64.4	36.00	1.26	46.550		
	56.7	41.00	1.11	52.909		
	50.5	45.00	0.99	59.413		

#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VBR	
	VCR	
	VCK	
Output flange diameter	120 mm	
	140 mm	
	160 mm	
Mounting position		A B C D E F
Position of electrical connection		2 3 4 5



Dimensions, type GST03-2GV□□-047C22

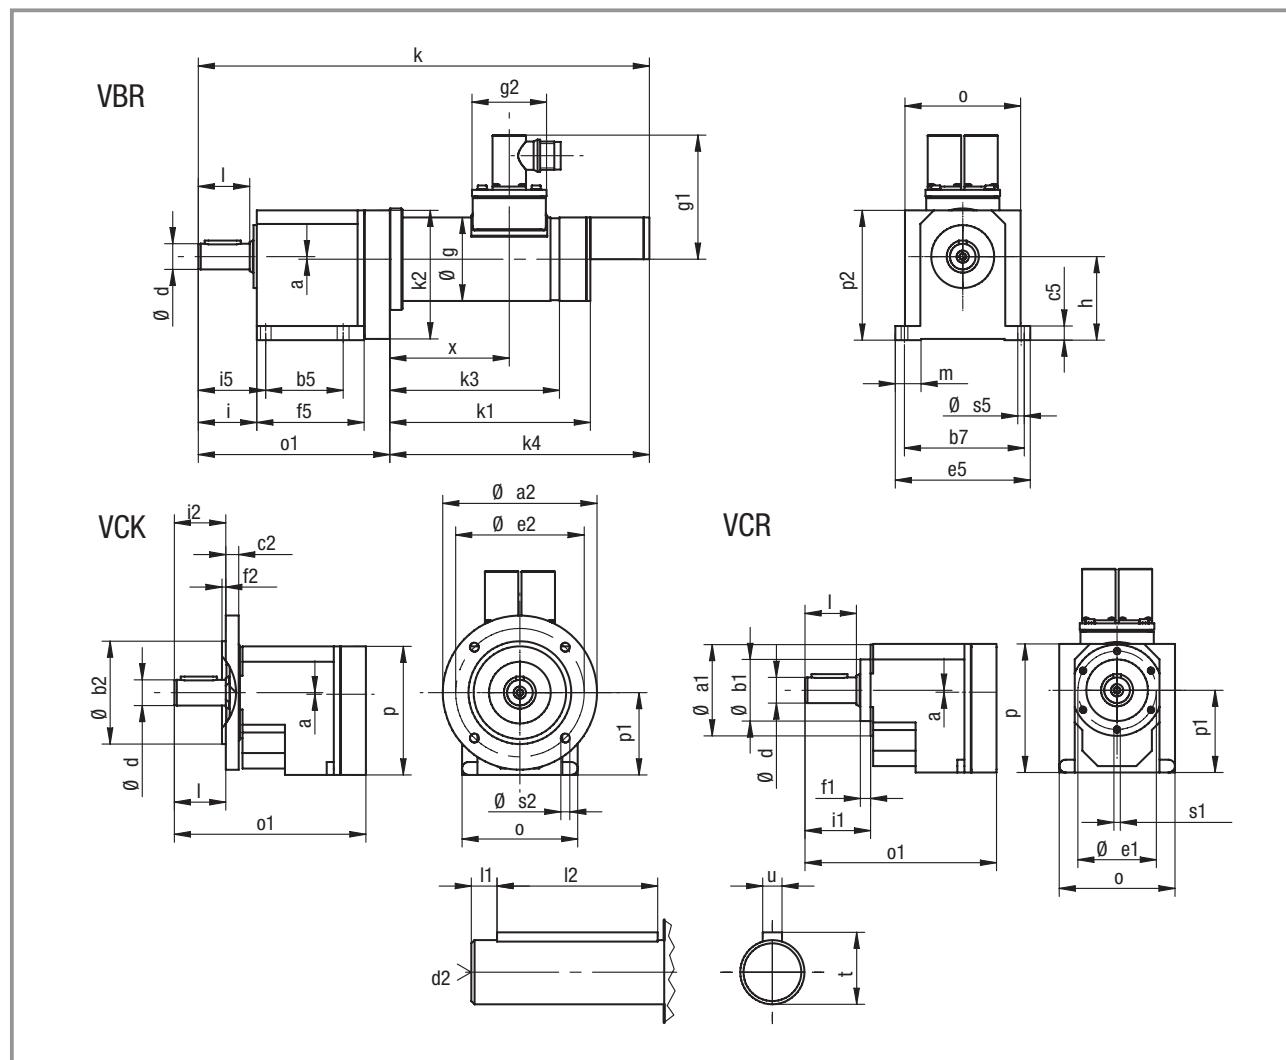

Geared motor	a	a1	a2	b1	b2	b5	b7	c2	c5	d	d2	e1	e2	e5	f1	f2	f5	g	g1	g2	h	i	i1	i2
GST03-2GV□□-047C22			120		80							100					3							
	2	71	140	48	95	60	91	10	11	20	M6	61	115	105	8	3	84	75	101	58	65	46	51	40
			160		110							130				3.5								

i5	k	k1	k1	k2	k3	k4	k4	I	I1	I2	m	o	o1	p	p1	p2	s1	s2	s5	t	u	x	Weight [kg]
52	384.5	191	202.5	100	158.5	235	246.5	40	5	28	20	90	149.5	100	64	101	M5	9	6.6	22.5	6	117.5	6.0-7.5

Dimensions in mm



## Drive selection

### Servo helical geared motors GST

#### Selection table, type GST04-1GV□□-056C22


P <sub>r</sub> W	Rated data			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
500	1875.0	3.00	3.83	1.600	SDSGS□□056-22	
	1464.8	3.00	3.74	2.048		
	1339.3	4.00	3.87	2.240		
	1050.1	4.00	3.39	2.857		
	857.1	5.00	2.92	3.500		
	681.8	7.00	2.32	4.400		
	529.4	9.00	1.80	5.667		
	417.7	11.00	1.42	7.182		
	333.3	14.00	1.08	9.000		

#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VBR	
	VCR	
	VCK	
Output flange diameter	120 mm	
	140 mm	
	160 mm	
Mounting position	A B C D E F	
Position of electrical connection		2 3 4 5



Dimensions, type GST04-1GV□□-056C22

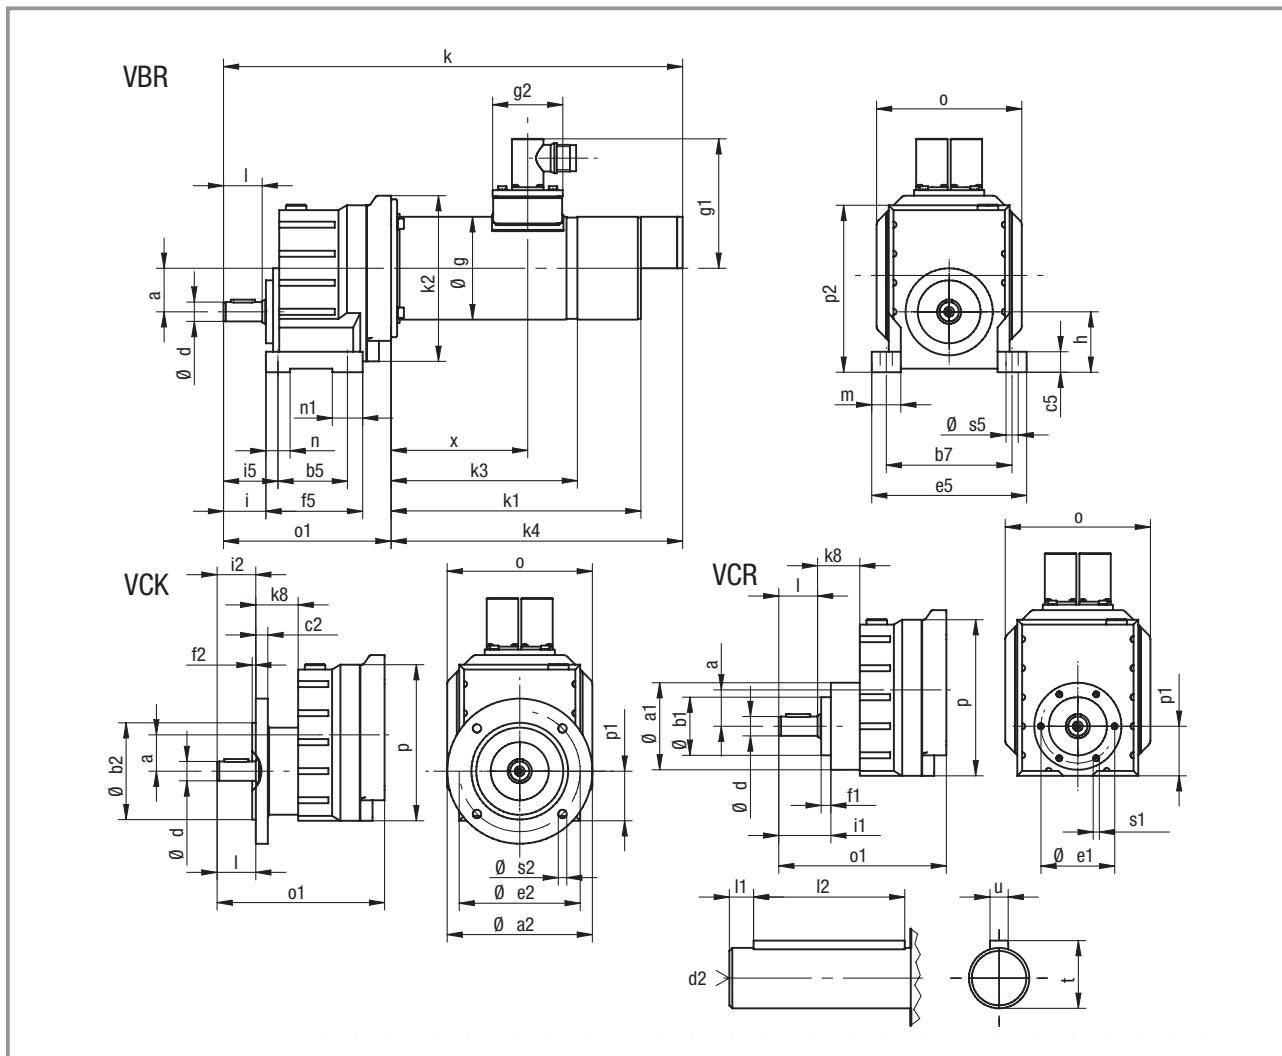

Geared motor	a	a1	a2	b1 h7	b2 j7	b5	b7	c2	c5	d k6	d2	e1	e2	e5	f1	f2	f5	g	g1	g2	h	i	i1	i2
GST04-1GV□□-056C22	36	72	120	48	80	55	105	10	17	16	M5	61	100	130	8	3	80	85	106	58	50	35	43	32
				140		95							115			3								
				160		110							130			3.5								

i5	k BS	k1 RS	k1 AG	k2 XX	k3 BS	k4 BA	k8	l	l1	l2	m	n	n1	o	o1	p	p1	p2	s1	s2	s5	t	u	x	Weight [kg]
45	379.5	188.5	200	129	156	241	252.5	35	32	6	20	25	20	115	138.5	129	41	138	M5	7	9	18	5	113	
																								7.5-9.0	
																								9	

Dimensions in mm



## Drive selection

### Servo helical geared motors GST

#### Selection table, type GST04-2GV□□-056C22


P <sub>r</sub> W	Rated data			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
500	1014.9	5.00	3.88	2.956	SDSGS□□056-22	
	900.1	5.00	3.91	3.333		
	740.2	6.00	3.86	4.053		
	656.3	7.00	3.87	4.571		
	578.4	8.00	3.82	5.187		
	512.8	9.00	3.83	5.850		
	468.8	10.00	3.66	6.400		
	426.1	11.00	3.40	7.040		
	375.0	12.00	3.13	8.000		
	333.0	14.00	2.95	9.010		
	304.4	15.00	2.80	9.856		
	267.9	17.00	2.28	11.200		
	238.6	19.00	2.32	12.571		
	210.0	22.00	1.79	14.286		
	194.8	24.00	2.16	15.400		
	171.4	27.00	1.70	17.500		
	155.0	30.00	1.75	19.360		
	136.4	34.00	1.35	22.000		
	120.3	38.00	1.38	24.933		
	105.9	44.00	1.08	28.333		
	94.9	49.00	1.10	31.600		
	83.5	47.00	0.86	35.909		
	75.8	54.00	0.88	39.600		
	66.7	52.00	0.75	45.000		

#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VBR	
	VCR	
	VCK	
Output flange diameter	120 mm	
	140 mm	
	160 mm	
Mounting position	A B C D E F	
Position of electrical connection	2 3 4 5	



Dimensions, type GST04-2GV□□-056C22

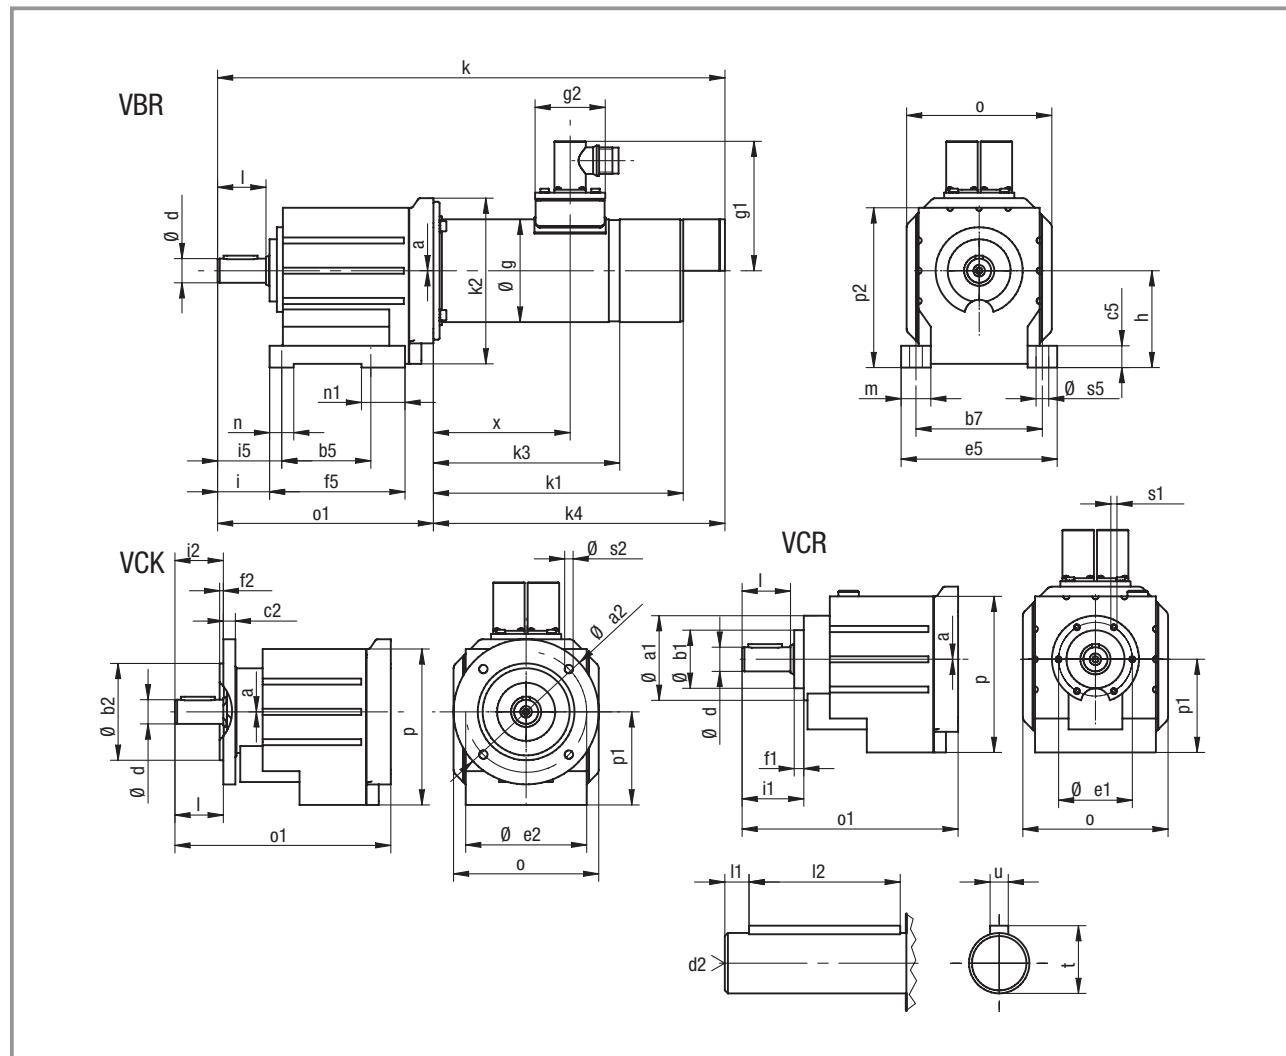

Geared motor	a	a1	a2	b1	b2	b5	b7	c2	c5	d	d2	e1	e2	e5	f1	f2	f5	g	g1	g2	h	i	i1	i2
GST04-2GV□□-056C22	0	72	120	48	80	76	105	10	18	20	M6	61	100	130	8	3	112	85	106	58	80	43	51	40
		140		95								115			3									
		160		110								130			3.5									

i5	k	k1	k1	k2	k3	k4	k4	l	l1	l2	m	n	n1	o	o1	p	p1	p2	s1	s2	s5	t	u	x	Weight [kg]
53	419.5	188.5	200	129	156	241	252.5	40	5	28	25	20	36	115	178.5	129	77	132	M5	7	9	22.5	6	113	9.5-11.0

Dimensions in mm



## Drive selection

### Servo bevel geared motors GKR

#### Selection table, type GKR03-2G□A□-035C22


P <sub>r</sub> W	Rated data			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
140	554.40	2.00	13.83	5.411	SDSGS□□-035-22	
	482.20	3.00	12.41	6.222		
	421.90	3.00	11.51	7.111		
	366.80	3.00	10.30	8.178		
	329.60	4.00	9.51	9.101		
	286.60	4.00	8.27	10.466		
	257.70	5.00	7.44	11.64		
	224.10	6.00	6.47	13.386		
	198.50	6.00	5.73	15.111		
	172.60	7.00	4.98	17.378		
	154.90	8.00	4.47	19.365		
	134.70	10.00	3.89	22.27		
	119.80	11.00	3.92	25.051		
	104.10	12.00	3.41	28.808		
	92.00	14.00	3.01	32.593		
	80.00	16.00	2.62	37.481		
	71.10	18.00	2.49	42.222		
	61.80	21.00	2.17	48.556		
	55.70	23.00	1.95	53.889		
	48.40	26.00	1.70	61.972		

#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VAR	
	VAK	
	HAR	
	HAK	
Output flange diameter	110 mm	
	120 mm	
Hollow shaft bore	18 mm	
	20 mm	
Shaft position on type VAR		3 5 8
Flange/shaft position on type VAK		3 5
Flange position on type HAK		3 5
Mounting position		A B C D E F
Position of electrical connection		2 3 4 5



**Dimensions, type GKR03-2G□A□-035C22**

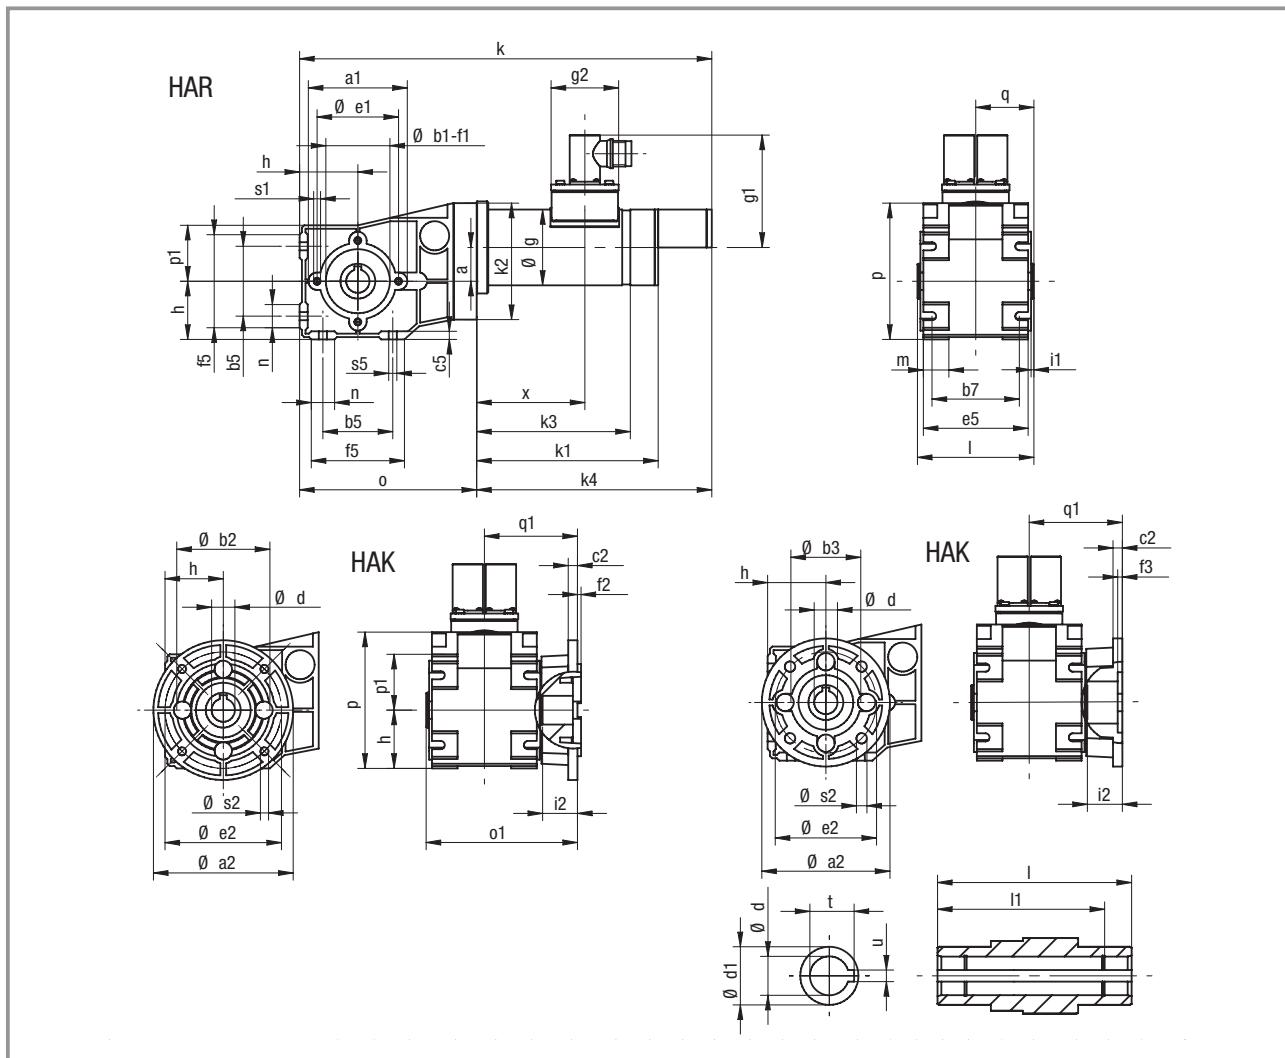

Geared motor	a	a1	a2	b1	b2	b3	b5	b7	c2	c5	d	d1	e1	e2	e5	f1	f2	f3	f5	g	g1	g2	h	i1
GKR03-2GHA□-035C22	29	84	120	55	80	-	60	75	8	7	18	30	70	100	90	3	3	-	80	65	95	58	50	2.5
		110		-	60				20	30		87			4									

i2	k	k1	k1	k2	k3	k4	k4	l	l1	m	n	o	o1	p	p1	q	q1	s1	s2	s5	t	u	x	Weight [kg]
30	354	166.5	178	100	136	202	222.5	100	86	22	20	152	130	117	48	50	80	M6	7	6.6	20.8	6	93	5.0-6.5
																			9		22.8	6		


Dimensions in mm



## Drive selection

Servo bevel geared motors GKR


Dimensions, type GKR03-2GVA□-035C22

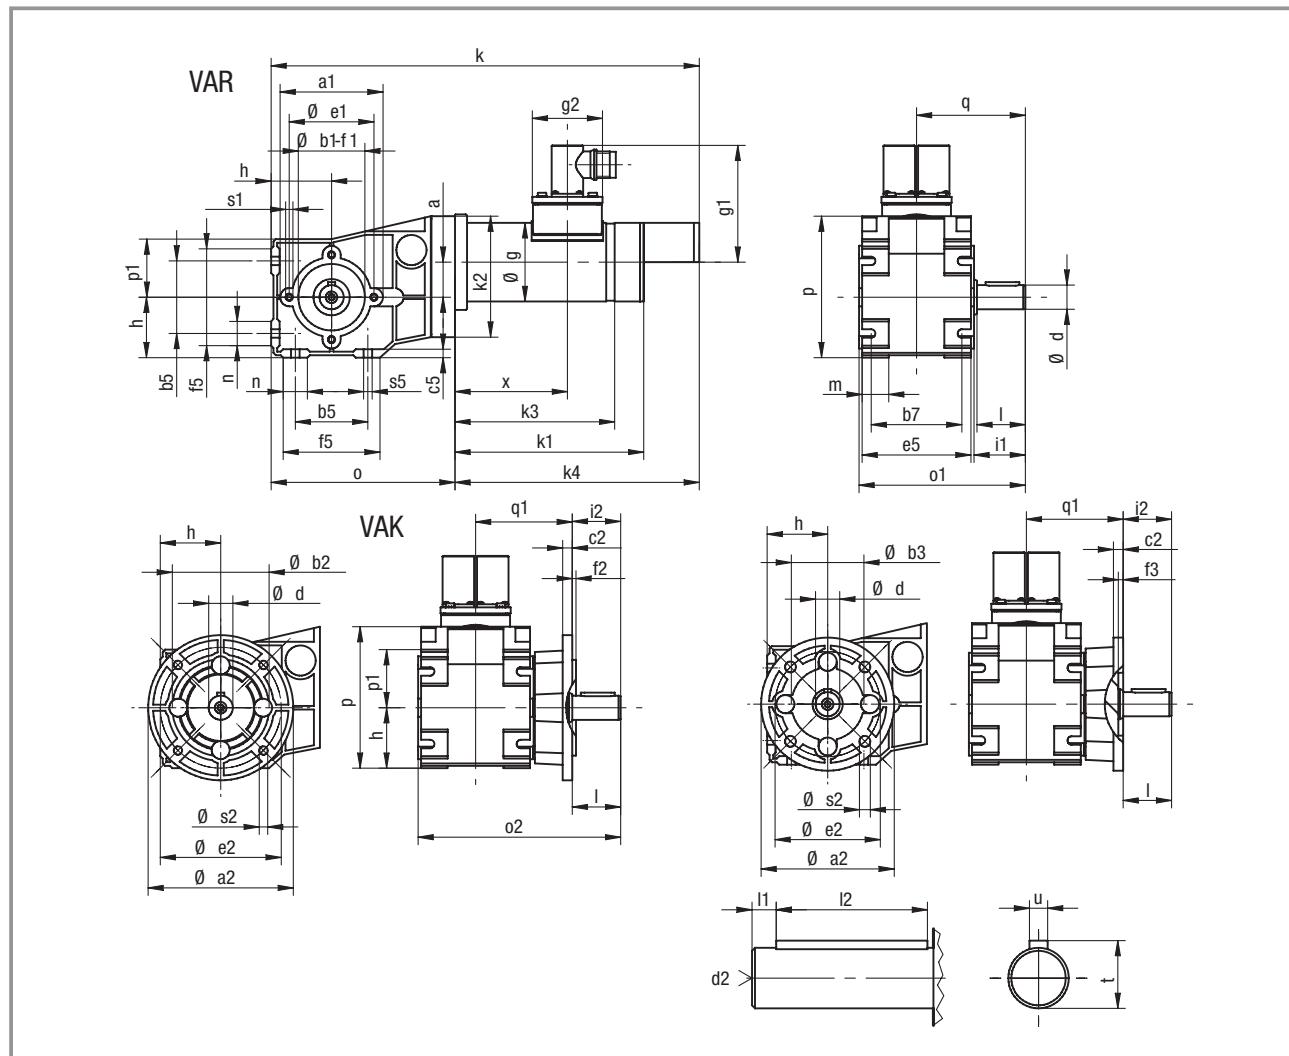

Geared motor	a	a1	a2	b1	b2	b3	b5	b7	c2	c5	d	d2	e1	e2	e5	f1	f2	f3	f5	g	g1	g2	h	i1
GKR03-2GVA□-035C22	29	84	120	55	80	-	60	75	8	7	20	M6	70	100	90	2.5	3	-	80	65	95	58	50	42.5
		110		-	60							87				4								

i2	k	k1	k1	k2	k3	k4	k4	l	l1	l2	m	n	o	o1	o2	p	p1	q	q1	s1	s2	s5	t	u	x	Weight [kg]
BS	BS	RS	AG	XX	XX	BS	BA																			
40	354	166.5	178	100	136	202	222.5	40	5	28	22	20	152	138	168	117	48	90	80	M6	7	6.6	22.5	6	93	5.0-6.5

Dimensions in mm

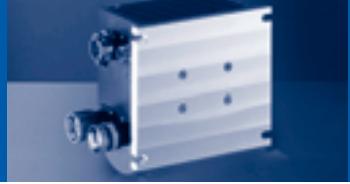

4

**Lenze**

930 fluxxtorque Servo Drives en 1/2007

**4-27**



## Drive selection

### Servo bevel geared motors GKR

**Selection table, type GKR03-2G□A□-047C22**


P <sub>r</sub> W	Rated data			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm	M <sub>2</sub> Nm	c			
250	554.4	4.00	7.78	5.411	SDSGS□□047-22	
	482.2	5.00	6.98	6.222		
	421.9	5.00	6.48	7.111		
	366.8	6.00	5.79	8.178		
	329.6	7.00	5.35	9.101		
	286.6	8.00	4.65	10.466		
	257.7	9.00	4.18	11.640		
	224.1	10.00	3.64	13.386		
	198.5	11.00	3.22	15.111		
	172.6	13.00	2.80	17.378		
	154.9	15.00	2.51	19.365		
	134.7	17.00	2.19	22.270		
	119.8	19.00	2.21	25.051		
	104.1	22.00	1.92	28.808		
	92.0	25.00	1.70	32.593		
	80.0	28.00	1.47	37.481		
	71.1	32.00	1.40	42.222		
	61.8	37.00	1.22	48.556		
	55.7	41.00	1.10	53.889		
	48.4	45.00	0.96	61.972		

#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VAR	
	VAK	
	HAR	
	HAK	
Output flange diameter	110 mm	
	120 mm	
Hollow shaft bore	18 mm	
	20 mm	
Shaft position on type VAR		3 5 8
Flange/shaft position on type VAK		3 5
Flange position on type HAK		3 5
Mounting position		A B C D E F
Position of electrical connection		2 3 4 5



## Dimensions, type GKR03-2GHA□-047C22

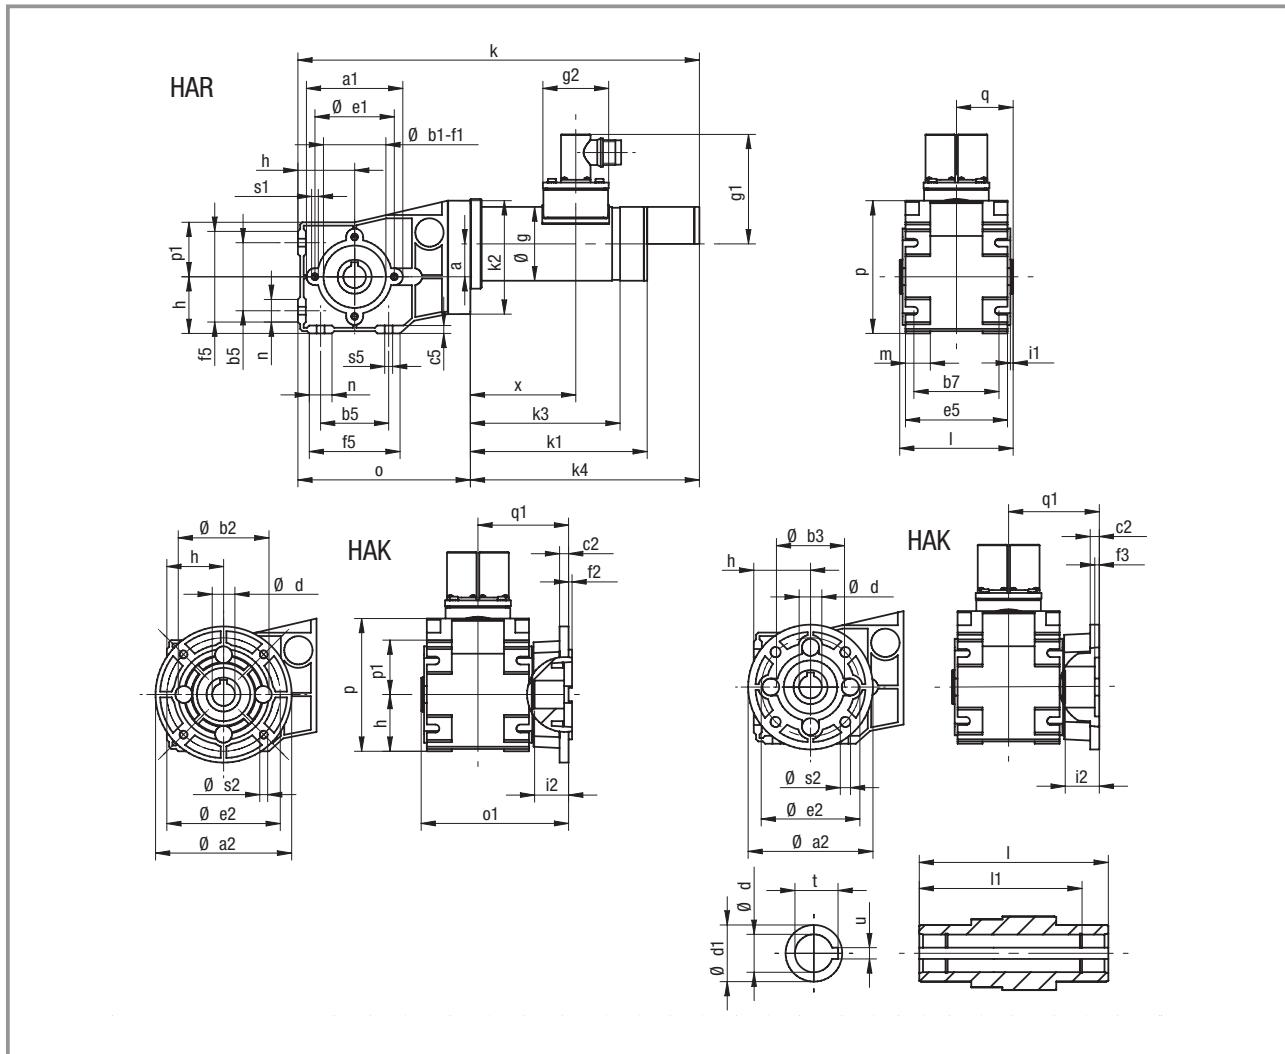

Geared motor	a	a1	a2	b1 J7	b2 j7	b3 H7	b5	b7	c2	c5	d H7	d1	e1	e2	e5	f1	f2	f3	f5	g	g1	g2	h	i1
GKR03-2GHA□-047C22	29	84	120	55	80	-	60	75	8	7	18	30	70	100	90	3	3	-	80	75	101	58	50	2.5
			110		-	60					20	30		87			4							


Dimensions in mm



## Drive selection

Servo bevel geared motors GKR


Dimensions, type GKR03-2GVA□-047C22

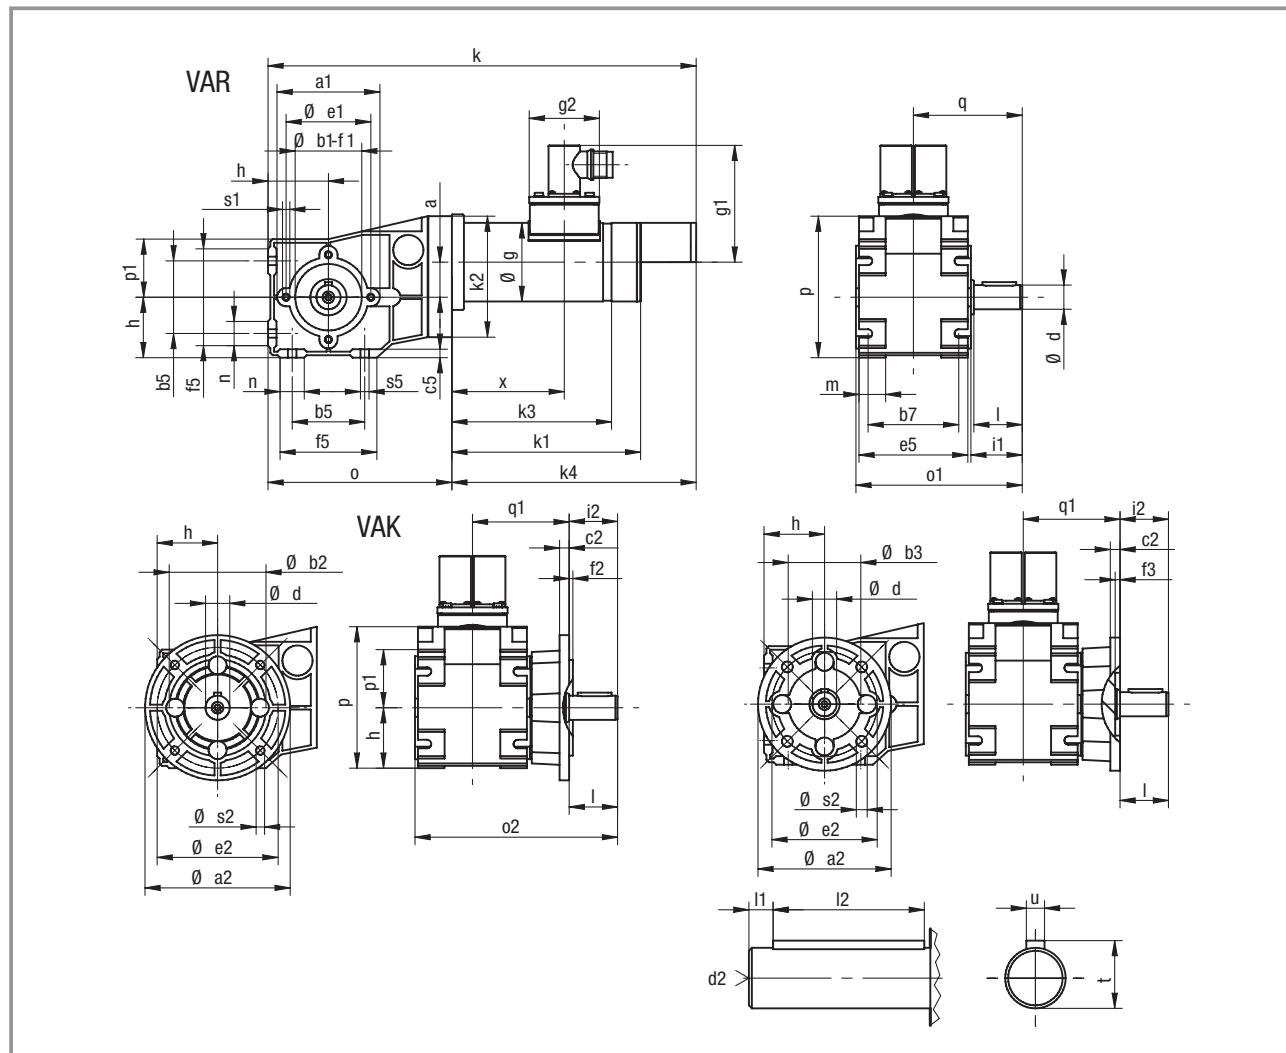

Geared motor	a	a1	a2	b1	b2	b3	b5	b7	c2	c5	d	d2	e1	e2	e5	f1	f2	f3	f5	g	g1	g2	h	i1
GKR03-2GVA□-047C22	29	84	120	55	80	-	60	75	8	7	20	M6	70	100	90	2.5	3	-	80	75	101	58	50	42.5
		110		-	60							87				4								

i2	k	k1	k1	k2	k3	k4	k4	l	l1	l2	m	n	o	o1	o2	p	p1	q	q1	s1	s2	s5	t	u	x	Weight [kg]
BS	RS	AG	XX	BS	BA																					
40	387	191	202.5	100	158.5	235	246.5	40	5	28	22	20	152	138	168	117	48	90	80	M6	7	6.6	22.5	6	117.5	6.0-7.5

Dimensions in mm

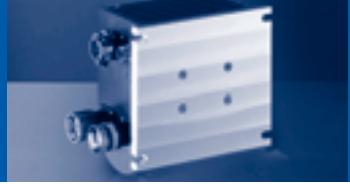

4

**Lenze**

930 fluxxtorque Servo Drives en 1/2007

4-31



## Drive selection

### Servo bevel geared motors GKR

#### Selection table, type GKR04-2G□A□-056C22


P <sub>r</sub> W	Rated data			i	Motor type	Selection Please tick
	n <sub>2</sub> rpm Nm	M <sub>2</sub>	c			
440	578.6	8.00	3.86	5.185	SDSGS□□056-22	
	503.1	9.00	3.80	5.963		
	421.9	11.00	3.77	7.111		
	366.8	12.00	3.80	8.178		
	329.6	14.00	3.82	9.101		
	286.6	16.00	3.62	10.466		
	262.0	17.00	3.36	11.449		
	236.3	19.00	3.03	12.698		
	205.4	22.00	2.63	14.603		
	192.9	24.00	2.47	15.556		
	167.7	27.00	2.15	17.889		
	153.4	30.00	1.96	19.556		
	133.4	34.00	1.71	22.489		
	119.1	38.00	1.73	25.185		
	103.6	44.00	1.51	28.963		
	94.0	49.00	1.37	31.919		
	81.7	56.00	1.19	36.707		
	75.0	61.00	1.09	40.000		
	65.2	70.00	1.03	46.000		

#### Additional order information

Enclosure	IP54	
	IP55	
B-side version	with resolver	
	with spring-applied brake and resolver	
	with permanent magnet brake and resolver	
Gearbox type	VAR	
	VAK	
	HAR	
	HAK	
Output flange diameter	110 mm	
	120 mm	
Hollow shaft bore	18 mm	
	20 mm	
Shaft position on type VAR		3 5 8
Flange/shaft position on type VAK		3 5
Flange position on type HAK		3 5
Mounting position		A B C D E F
Position of electrical connection		2 3 4 5



Dimensions, type GKR04-2GVA□-056C22

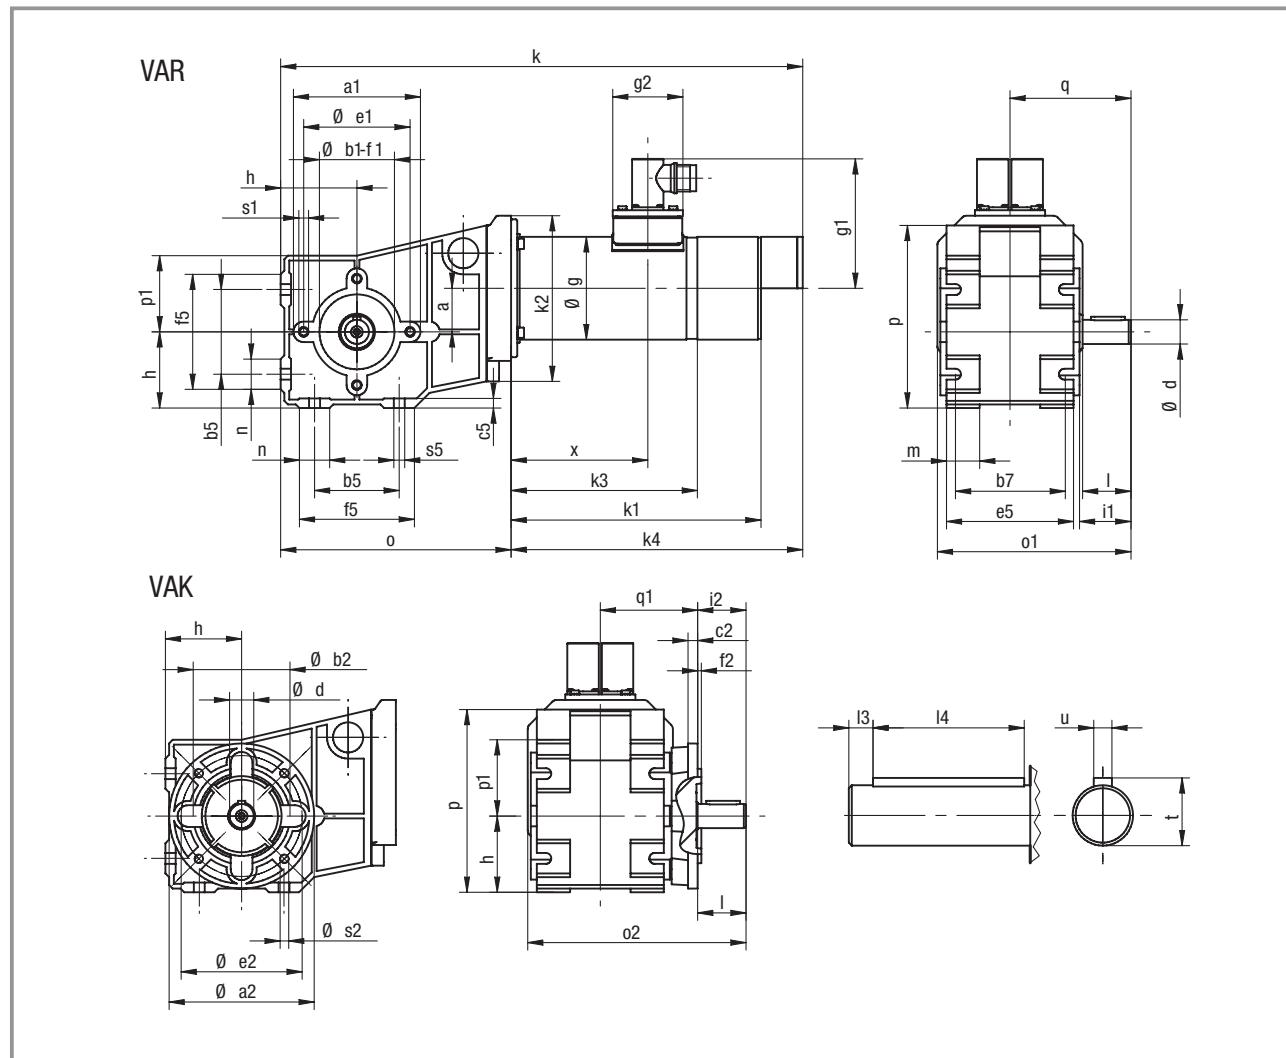

Geared motor	a	a1	a2	b1 J7	b2 j7	b5	b7	c2	c5	d k6	d2	e1	e2	e5	f1	f2	f5	g	g1	g2	h	i1	i2	k BS
GKR04-2GVA□-056C22	36	104	120	62	80	70	90	8	8	20	M6	88	100	105	3	3	95	85	106	58	63	42.5	20	431.5
		160		110					25			130		3.5										


k1 RS	k1 AG	k2 XX	k3 BS	k4 BA	k4 BS	I	I1	I2	m	n	o	o1	o2	p	p1	q	q1	s1	s2	s5	t	u	x	Weight [kg]
188.5	200	129	156	241	252.5	40	5	28	28	25	190.5	140	168	151	63	60	80	M8	7	9	22.8	6	113	8.5-11

Dimensions in mm



**Drive selection**  
Servo bevel geared motors GKR


Dimensions, type GKR04-2GHA□-056C22

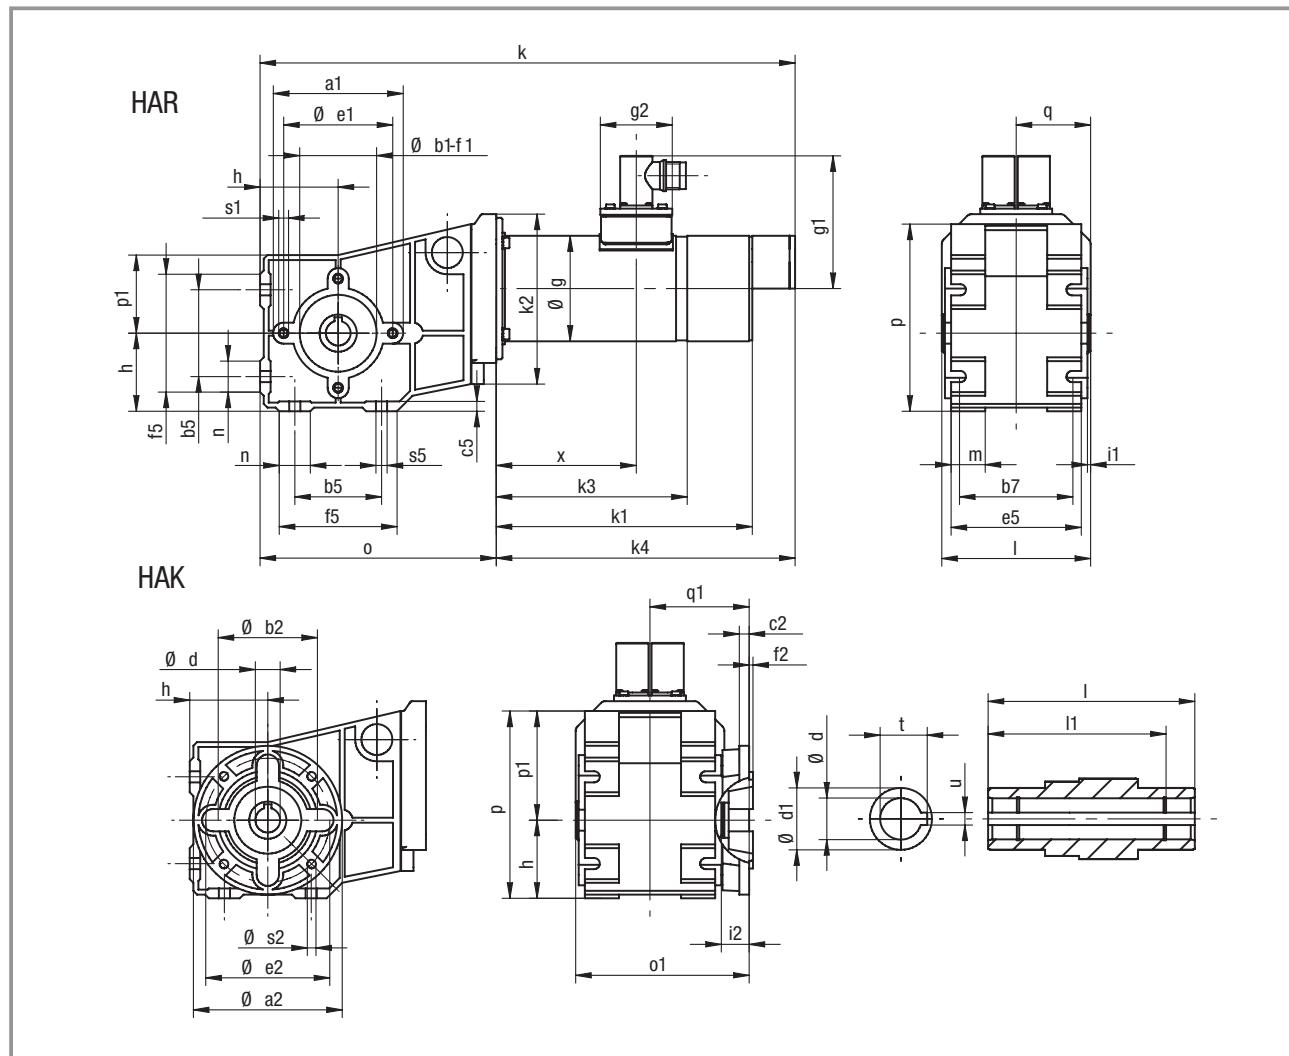

Geared motor	a	a1	a2	b1	b2	b5	b7	c2	c5	d	d1	e1	e2	e5	f1	f2	f5	g	g1	g2	h	i1	i2	k
GKR04-2GHA□-056C22	36	104	120	62	80	70	90	8	8	20	30	88	100	105	3	3	95	85	106	58	63	2.5	20	431.5
				160		110				25	35		130			3.5								

k1	k1	k2	k3	k4	k4	I	I1	m	n	o	o1	p	p1	q	q1	s1	s2	s5	t	u	x	Weight [kg]	
RS	AG		XX	BS	BA							M8	7	9	22.8	6	113					8.5-11	
188.5	200	129	156	241	252.5	120	106	28	25	190.5	140	151	63	60	80								
																9	27	8					

Dimensions in mm

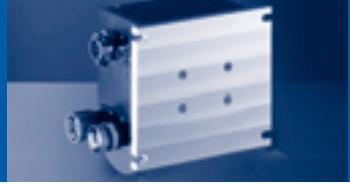

4

**Lenze**

930 fluxxtorque Servo Drives en 1/2007

**4-35**



# Lenze worldwide

## Lenze AG

Postfach 10 13 52  
D-31763 Hameln  
Telefon +49 (0)51 54/82-0  
Telefax +49 (0)51 54/82-28 00  
E-Mail: Lenze@Lenze.de  
Internet: www.Lenze.com

## Lenze Drive Systems GmbH

Postfach 10 13 52, D-31763 Hameln  
Telefon +49 (0)51 54 / 82-0  
Telefax +49 (0)51 54 / 82-28 00

## Lenze GmbH & Co KG Anlagenbau

Buchenweg 1  
D-31855 Aerzen  
Telefon +49 (0)51 54 / 82-0  
Telefax +49 (0)51 54 / 82-21 00

## Lenze GmbH & Co KG Kleinantriebe

Hans-Lenze-Straße 1  
D-32699 Extental  
Telefon +49 (0)51 54 / 82-0  
Telefax +49 (0)51 54 / 82-14 85

## Lenze Service GmbH

Breslauer Straße 3  
D-32699 Extental

**Mechanical Drives**  
Telefon +49 (0)51 54 / 82-16 26  
Telefax +49 (0)51 54 / 82-13 96

**Electronic Drives**  
Telefon +49 (0)51 54 / 82-11 11  
Telefax +49 (0)51 54 / 82-11 12

**Service Helpline**  
+49 (0)180 5 20 24 26

## Lenze Verbindungstechnik GmbH

Ipf-Landesstraße 1  
A-4481 ASTEN  
Telefon +43 (0)72 24 / 210-0  
Telefax +43 (0)72 24 / 210-998

## Lenze DETO Drive Systems GmbH & Co KG

Gewerbepark Süd 11  
A-6330 Kufstein  
Telefon +43 (0)53 72 / 6 53 15-200  
Telefax +43 (0)53 72 / 6 53 15-299

## Lenze Digitec Controls GmbH

Grünerberg 36  
D-40667 Meerbusch  
Telefon +49 (0)21 32 / 99 04-0  
Telefax +49 (0)21 32 / 7 21 90

## Schmidhauser AG

Obere Neustrasse 1  
CH-8590 Romanshorn  
Telefon +41 (0)71 466 11 11  
Telefax +41 (0)71 466 11 10

## encoway GmbH

Buschhöhe 2  
D-28357 Bremen  
Telefon +49 (0)4 21 / 24 67 77-0  
Telefax +49 (0)4 21 / 24 67 77-10

## DEUTSCHLAND/GERMANY

### Lenze Vertrieb GmbH

Ludwig-Erhard-Straße 52-56  
D-72760 Reutlingen  
Telefon +49 (0)71 21 / 9 39 39-0  
Telefax +49 (0)71 21 / 9 39 39-29

Region Nord  
Dornenpark 1  
31840 Hessisch Oldendorf  
Telefon (0 51 52) 90 36-0  
Telefax (0 51 52) 90 36-33/44/55

Region West  
Postfach 10 12 20  
47497 Neukirchen-Vluyn  
Kelinstraße 7  
47500 Neukirchen-Vluyn  
Telefon (0 28 45) 95 93-0  
Telefax (0 28 45) 95 93 93

Region Mitte/Ost  
Postfach 1463  
35724 Herborn  
Austraße 81  
35745 Herborn  
Telefon (0 27 72) 95 94-0  
Telefax (0 27 72) 5 30 79

Region Südwest  
Postfach 14 33  
71304 Waiblingen  
Schänzle 8  
71332 Waiblingen  
Telefon (71 51) 9 59 81-0  
Telefax (71 51) 9 59 81 50

Region Süd  
Fraunhoferstraße 16  
82152 Martinsried  
Telefon (0 89) 89 56 14-0  
Telefax (0 89) 89 56 14 14

## WELTWEIT/WORLDWIDE

### ALGERIA

see FRANCE

### ARGENTINA \*

E.R.H.S.A.  
Girardot 1368, 1427 BUENOS AIRES  
Phone +54 (0)11 / 45 54 32 32  
Telefax +54 (0)11 / 45 52 36 11

### AUSTRALIA \*

FCR Motion Technology Pty. Ltd.  
Unit 6, Automation Place  
38-40 Little Boundary Rd.  
LAVERTON NORTH, Vic. 3026  
Phone +61 (3) 9362 6800  
Telefax +61 (3) 9314 3744

### AUSTRIA \*

Lenze Antriebstechnik GmbH  
Ipf-Landesstraße 1  
4481 ASTEN  
Phone +43 (0)7224 / 210-0  
Telefax +43 (0)7224 / 210-999

Office Dornbirn:  
Lustenauer Straße 64  
6850 DORNBIRN  
Phone ++43 (0)7224 / 210-0  
Telefax ++43 (0)7224 / 210-7299

Office Wr. Neudorf:  
Triester Straße 14/109  
2351 WR. NEUDORF  
Phone ++43 (0)7224 / 210-0  
Telefax ++43 (0)7224 / 210-7099

Office Graz:  
Seiring 8  
8141 UNTERPREMSTÄTTEN  
Phone ++43 (0)7224 / 210-0  
Telefax ++43 (0)7224 / 210-7199

Lenze Verbindungstechnik GmbH  
Ipf-Landesstraße 1  
4481 ASTEN  
Phone +43 (0)7224 / 210-0  
Telefax +43 (0)7224 / 210-998

Lenze Anlagentechnik GmbH  
Mühlenstraße 3  
4470 ENNS  
Phone +43 (0)7224 / 210-0  
Telefax +43 (0)7224 / 210-997

### BELARUS

see POLAND

## BELGIUM \*

Lenze bv.b.a  
Noorderlaan 133  
bus 15, 2030 ANTWERPEN  
Phone +32 (0)3 / 54 26 20 0  
Telefax +32 (0)3 / 54 13 75 4

## BOSNIA-HERZEGOVINA

see AUSTRIA

## BRAZIL \*

AC Control Ltda  
Rua Gustavo da Silveira 1199  
Vila Sta. Catarina  
SAO PAULO - S.P. 04376-000  
Phone +55 (11) 55 64 65 79 ramal: 214  
Telefax +55 (11) 56 79 75 10

## BULGARIA

Lenze Zadvizhvasta Tehnika EOOD  
Bul. Maritsa 21, Office 204  
4003 PLOVDIV  
Phone +359 / 32 / 940 373  
Telefax +359 / 32 / 940 349

## CANADA \*

see USA

## CHILE

Sargent S.A.  
Tecnica Thomas C. Sargent  
S.A.C.é.l., Casilla 166-D  
SANTIAGO DE CHILE  
Phone +56 (0)2 / 51 03 000  
Telefax +56 (0)2 / 69 83 989

## CHINA \*

Lenze Mechatronic Drives  
(Shanghai) Co. Ltd.  
50 B, 199 North Ri Ying Road,  
Waigaoqiao FTZ  
SHANGHAI, 200131  
Phone +86-21-5046 0848  
Telefax +86-21-5046 2833

Shanghai Office  
Rm. 2905, Nanzheng Mansion  
No. 580, Nanjingxi Road  
SHANGHAI, 200041  
Phone +86-21-5228 2233  
Telefax +86-21-6267 7975

Beijing Office  
Shenghuo Mansion, Rm. 1830, No. 37,  
Maizidian Road, Chaoyang District,  
BEIJING, 100026  
Phone +86-10-8527 6898  
Telefax +86-10-8527 6899

## COLOMBIA

Casa Sueca, S.A.  
Calle 52 1N-74  
CALI  
Phone +57 2- 682 0444  
Telefax +57 2- 683 1411

## CROATIA

Lenze Antriebstechnik GmbH  
Predstavnista Zagreb  
Ulica Grada Gospica 3  
HR-1000 ZAGREB  
Phone +385-1-24 80 56  
Telefax +385-1-24 80 57

## CZECH REPUBLIC

Lenze, s.r.o.  
Central Trade Park D1  
396 01 HUMPOLEC  
Phone +420 565 507-111  
Telefax +420 565 507-399  
Büro Červeny Kostelec:  
17. listopadu 510  
549 41 ČERVENÝ KOSTELEC  
Phone +420 491 467-111  
Telefax +420 491 467-166

## DENMARK \*

Lenze A/S  
Vallensbækvej 18A, 2605 BRØNDBY  
Phone +45 / 46 96 66 66  
Telefax +45 / 46 96 66 60  
24 stunde service +45 / 40 93 04 11  
Buero Jylland: Lenze A/S  
Langhøjvej 1, 8381 TILST  
Phone +45 / 46 96 66 66  
Telefax +45 / 46 96 66 80

## BELARUS

see POLAND

## EGYPT

WADI Co. for technologies  
and development  
P.O.Box 209, new center Ramses  
11794 CAIRO, Egypt  
11 Syria St., Mohandessin  
GIZA, Egypt  
Phone +20 (2) 347 6842  
Telefax +20 (2) 347 6843

## ESTONIA

see FINLAND

## FINLAND \*

Lenze Drives  
Rykmentintie 2 b  
20810 TURKU  
Phone +358 2 2748 180  
Telefax +358 2 2748 189

## FRANCE \*

Lenze S.A.  
Siège  
ZI des Mardelles  
44 Rue Blaise Pascal  
93600 AULNAY-SOUS-BOIS  
Services Commerciaux  
Phone 0 825 086 036  
Telefax 0 825 086 346  
Centre de formation  
E-Mail : semin.sidonie@lenze.fr  
Questions générales / documentation  
E-Mail : info@lenze.fr  
Service Après-vente / assistance en ligne  
Helpline 24/24 : 0 825 826 117  
E-Mail : helpline@lenze.fr

Agences en France

Région France Nord :  
ZI des Mardelles  
44 Rue Blaise Pascal  
93600 AULNAY-SOUS-BOIS

Nantes

44000 NANTES

Strasbourg  
67870 GRIESHEIM près MOLSHEIM  
Rouen  
76500 ELBEUF

## Région France Sud :

Parc Technologique  
97, allée Alexandre Borodine  
Immeuble le Douglas 2  
69800 SAINT PRIEST

Toulouse

31400 TOULOUSE

Agen  
47270 SAINT-PIERRE de CLAIRAC

## GREECE

George P. Alexandris S.A.  
12K. Mavromichali Str.  
185 45 PIRAEUS  
Phone +30 (0)210 / 41 11 84 15  
Telefax +30 (0)210 / 41 11 81 71  
4 12 70 58  
183 Monastirou Str.  
546 27 THESSALONIKI  
Phone +30 (0)310 / 5 56 65 04  
Telefax +30 (0)310 / 51 18 15

## HUNGARY \*

Lenze Antriebstechnik  
Handelsgesellschaft mbH  
2040 BUDAÖRS  
Gyár utca 2., P.O.Box 322.  
Phone +36 (0)23 / 501-320  
Telefax +36 (0)23 / 501-339

## ICELAND

see DENMARK

## INDIA

Lenze Mechatronics Pvt. Ltd.  
Lenze Plot No. 46A, Sector-10  
PCNTDA Industrial Area  
Bhosari  
PUNE - 411 026  
Phone +91-20-66318100  
Telefax +91-20-66318120

Kolkata Sales office  
Block No. 81, 8th Floor  
Circular Court, 8 A.J.C. Bose Road  
KOLKATA - 700017  
Phone +91-33-22893161  
Telefax +91-33-22893162

New Delhi Sales office  
Flat No - 101, Padma Tower - II  
22, Rajendra Place  
NEW DELHI - 110008  
Phone +91-11-45062113/114  
Telefax +91-11-45062315

## INDONESIA

see MALAYSIA

## IRAN

Tavan Ressan Co. Ltd.  
P.O.Box. 19395-5177  
No. 44, Habibi St., South Dastour St.,  
Sadr EXPWay, TEHRAN 19396  
Phone +98 212 / 260 26 55  
260 67 66  
260 92 99  
Telefax +98 212 / 200 28 83

## ISRAEL \*

Zeev Melcer LTD  
P.O.B. 10011, HAIFA BAY 26110  
36 Yosef Levi St., Kiriat Bialik  
Phone +972 4 8757037  
Telefax +972 4 8146109

## ITALY \*

Lenze Gerit S.r.l.  
Viale Monza 338  
20128 MILANO  
Phone +39 02 / 270 98.1  
Telefax +39 02 / 270 98 290

## JAPAN \*

Miki Pulley Co., Ltd.  
1-39-7 Komatsubara, Zama-city  
KANAGAWA 228-8577  
Phone +81 (0)462 / 58 16 61  
Telefax +81 (0)462 / 58 17 04

## LATVIA

see LITHUANIA

## LEBANON

I. Network Automation s.a.l.  
Ground floor - United insurance building  
Facing Mercedes Show room  
Dora - High Way  
BEIRUT-METEN  
P.O.Box 835 - Jounieh - Lebanon  
Phone +961-1-249562  
Telefax +961-1-249563

## LITHUANIA

Lenze UAB  
Breslaujos g.3, 44043 KAUNAS  
Phone +370 37 407174  
Telefax +370 37 407175

## LUXEMBOURG \*

see BELGIUM

## MACEDONIA

Lenze Antriebstechnik GmbH  
Pretestavništvo Skopje  
ul. Nikola Rusinski 3/A/2, 1000 SKOPJE  
Phone +389 2 30 90 090  
Telefax +389 2 30 90 091

## MALAYSIA

Lenze S.E.A. Sdn Bhd  
No. 28 Jalan PJU 3/47  
Sunway Damansara, Technology Park  
47810 PETALING JAVA  
SELANGOR DARUL EHSAN  
Phone +60 3 7803 1428  
Telefax +60 3 7806 3728

## MAURITIUS

Automation & Controls Engineering Ltd  
3, Royal Road, Le Hochet, Terre Rouge  
MAURITIUS  
Phone +230 248 8211  
Telefax +230 248 8968

## MEXICO

Automatización y Control  
de Energía S.A. de C.V.  
Av. No. 289 Esq Calle 13  
Col. San Pedro de los Pinos  
C.P. 03800 MEXICO D.F.  
Phone +52 (55) 2636-3540  
Telefax +52 (55) 2636-3541

## MOROCCO

GUORFET G.T.D.R  
Automatisation Industrielle  
Bd Cheftchaouni Route 110 km, 11.500  
No. 353-Aïn-Sabâa  
CASABLANCA  
Phone +212/22-35 70 78  
Telefax +212/22-35 71 04

## NETHERLANDS \*

Lenze B.V., Postbus 31 01  
5203 DC 'S-HERTOGENBOSCH  
Ploegweg 15  
5232 BR 'S-HERTOGENBOSCH  
Phone +31 (0)73 / 64 56 50 0  
Telefax +31 (0)73 / 64 56 51 0

## NEW ZEALAND \*

Tranz Corporation  
343 Church Street  
P.O. Box 12-320, Penrose  
AUCKLAND  
Phone +64 (0)9 / 63 45 51 1  
Telefax +64 (0)9 / 63 45 51 8

## NORWAY \*

Dtc- Lenze as  
Stallbakken 5, 2005 RÆLINGEN  
Phone +47 / 64 80 25 10  
Telefax +47 / 64 80 25 11

## PHILIPPINES

see MALAYSIA

## POLAND

Lenze-Rotiw Sp. z o.o.  
ul. Roździeńskiego 188b  
40-203 KATOWICE  
Phone +48 (0)32 / 203 97 73  
Telefax +48 (0)32 / 781 01 80  
  
Lenze Systemy Automatyki Sp. z o.o.  
Ul. Rydygiera 47  
87-100 TORUN  
Phone +48 (0)56 / 658 28 00  
6 45 34 60  
6 45 35 70  
Telefax +48 (0)56 / 645 33 56

## PORTUGAL \*

Costa Leal el Victor  
Electronica-Pneumatica, Lda.  
Rua Prof. Augusto Lessa, 269,  
Apart. 52053  
4202-801 PORTO  
Phone +351-22 / 5 50 85 20  
Telefax +351-22 / 5 02 40 05

## ROMANIA

see AUSTRIA

## RUSSIA

Inteldrive  
1-ja Buhvostova Street 12/11  
Korpus 17-18 Office 213  
MOSCOW 107076  
Phone +7 495 748 7827  
Fax/Tel. +7 495 963 9686

## SERBIA-MONTENEGRO

see MACEDONIA

## SINGAPORE \*

see MALAYSIA

## SLOVAC REPUBLIC

ECS Sluzby spol. s.r.o.  
Staromlynska 29  
82106 BRATISLAVA  
Phone +421 2 45 25 96 06  
+421 2 45 64 31 47  
+421 2 45 64 31 48  
Telefax +421 2 45 25 96 06

## SLOVENIA

LENZE GmbH, Asten, Avstria  
Podružnica Celje  
Kidričeva 24  
3000 CELJE  
Phone +386 03 426 46 40  
Telefax +386 03 426 46 50

## SOUTH AFRICA \*

S.A. Power Services (Pty) Ltd.  
Unit 14, Meadowbrook Business Estates  
Jacaranda Ave, Olivedale  
Randburg 2158, P.O.Box 1137  
RANDBURG 2125  
Phone +27(11) 462-8810  
Telefax +27(11) 704-5775

## SOUTH KOREA \*

Hankuk Mechatro Ltd.  
Room# 1409  
Samwhan officetel 830-295  
Beomil-dong, Dong-Gu  
PUSAN  
Phone +82 (0)51-635-6663  
Telefax +82 (0)51-635-6632

## SPAIN \*

Lenze Transmisiones, S.A. (Headquarter)  
Mila i Fontanals, 135-139  
08205 SABADELL  
Barcelona  
Phone +34 937 207 680  
Telefax +34 937 120 215

## Lenze Delegación Bilbao

P.I. Ibarbarri. Ed. METRO 2º-E  
48900 LEJONA  
Vizcaya  
Phone +34 944 630 510 / 507  
Telefax +34 944 314 196

## Lenze Delegación Levante

Cullera, 73 - 49D  
46035 BENIMAMET  
Valencia  
Phone +34 963 905 220 / 335  
Telefax +34 963 900 647

## Lenze Delegación Madrid

Arturo Soria, 187 - Of. 8  
28043 MADRID

Phone +34 915 103 341

Telefax +34 915 102 061

Lenze Delegación Levante

Cullera, 73 - 49D

46035 BENIMAMET

Valencia

Phone +34 963 905 220 / 335

Telefax +34 963 900 647

## SWEDEN \*

Lenze Transmissioner AB  
PO.Box 10 74, Attorpsgatan, Tornby Ind.  
58110 LINKOPING  
Phone +46 (0)13 / 35 58 00  
Telefax +46 (0)13 / 10 36 23

## SWITZERLAND \*

Lenze Bachofen AG  
Ackerstrasse 45  
8610 USTER  
Phone +41 (0) 43 399 14 14  
Telefax +41 (0) 43 399 14 24

## Vente Suisse Romande:

Route de Prilly 25  
1023 CRISSIER  
Phone +41 (0)21 / 63 72 19 00  
Telefax +41 (0)21 / 63 72 19 9

## SYRIA

Zahabi Co.  
8/5 Shouhadaa Street, P.O.Box 8262  
ALEPPO-SYRIA  
Phone +963 21 21 22 23 5  
Telefax +963 21 21 22 23 7

## TAIWAN \*

Lenze Taiwan Representative Office  
4F, No. 5, Lane 83, Sec. 1  
Kuang-Fu Road, San-Chung City  
TAIPEI Hsien  
Taiwan 241, R.O.C.  
Phone +886 / (0)2-2995-8529  
Telefax +886 / (0)2-2999-3775

ACE Pillar Co., Ltd.  
2F, No. 7, Lane 83, Sec. 1  
Kuang-Fu Road, San-Chung City  
TAIPEI Sheing  
Phone +886 / (0)2-2995-8400  
Telefax +886 / (0)2-2995-3466

## THAILAND

see MALAYSIA

## TUNESIA

AMF Industrie Sarl  
Route de Gremonde - Km 0,2  
Immeuble El Madina,  
Centre Bloc B - 5 ème - aptt 52  
3002 SFAX

Phone +216 74 403 514

Telefax +216 74 402 516

LSE Elektrik  
Elektronik Makina  
Otomasyon Mühendislik  
Sanayi ve Ticaret Ltd. Şti  
Atatürk mah. Cumhuriyet cad.  
Yurt sok. No: 7  
ÜMRANIYE/İSTANBUL  
Phone +90 (0)216 / 316 5138 pbx  
Telefax +90 (0)216 / 443 4277

## UKRAINE

SV Altera, Ltd.  
Lepse ave., 4  
KIÈV, 03067  
Phone +38 044 496 18 88  
Telefax +38 044 496 18 88

## UNITED ARAB EMIRATES

LPT (FZC)  
Executive Suite X4-37  
P.O. Box: 9304, SAIF ZONE  
SHARJAH AIRPORT INTERNATIONAL  
FREE ZONE (SAIF ZONE)  
Phone +971 6 5573205  
Telefax +971 6 5573206

## UNITED KINGDOM/EIRE \*

Lenze Ltd.  
Caxton Road  
BEDFORD MK 41 OHT  
Phone +44 (0)1234 / 32 13 21  
Telefax +44 (0)1234 / 26 18 15

## USA \*

AC Technology Corp.  
630 Douglas Street  
UXBRIDGE, MA 01569  
Phone +1 508 / 278-9100  
Telefax +1 508 / 278-9873

Lenze Corporation  
1730 East Logan Avenue  
EMPORIA, KS 66 801  
Phone +1 620 / 343-8401  
+1 888 / 269-2381  
Telefax +1 620 / 342-2595  
+1 800 / 469-0931

Lenze DETO Drive Systems USA, LLC  
5912 Sterling Drive  
HOWELL, MI 48843  
Phone +1 517 / 586-4057  
Telefax +1 517 / 586-4058

## VIETNAM

see MALAYSIA

\* Countries connected to the free expert helpline 008000 24 hours (008000 24 46877)

# It's good to know | why we are there for you



*"Our customers come first. Customer satisfaction is what motivates us. By thinking in terms of how we can add value for our customers we can increase productivity through reliability."*



*"The world is our marketplace. We develop and manufacture internationally. Wherever you are in the world, we are nearby."*



*"We will provide you with exactly what you need – perfectly co-ordinated products and solutions with the right functions for your machines and installations. That is what we mean by 'quality'."*



*"Take advantage of our wealth of expertise. For more than 50 years we have been gathering experience in various fields and implementing it consistently and rigorously in our products, motion functions and preprepared solutions for industry."*



*"We identify with your targets and strive towards a long-term partnership which benefits both sides. Our competent support and consultation process means that we can provide you with tailor-made solutions. We are there for you and can offer assistance in all of the key processes."*

**You can rely on our service. Expert advice is available 24 hours a day, 365 days a year, in more than 30 countries via our international helpline: 008000 24 Hours (008000 2446877).**

## **Lenze GmbH & Co KG Kleinantriebe**

Postfach 10 13 52 · D-31763 Hameln

Site: Hans-Lenze-Straße 1 · D-32699 Extertal

Phone +49 (0)51 54 82-0 · Telefax +49 (0)51 54 82-14 85

E-Mail: Kleinantriebe@Lenze.de · Lenze@Lenze.de